

**CAPACITIVE  
SENSORS  
KAS**

***Series 26***

Level Control

- Food Industry
- Pharmaceutical Industry
- Semiconductor Industry
- Chemical Industry





Registrier-Nr.: 1327-01

Testing laboratory accredited according to  
DIN EN 45001 Reg.-No. DAT-P-048/95-00

For all transactions, the latest version of the „General Conditions of Sale and Delivery for Products and Services of the Electrical Industry ZVEI“ shall apply, along with the supplementary conditions „extended reservation of proprietary rights“, together with the supplements listed on our order confirmations and/or invoices.

All specifications are subject to change without notice. Reprint, even in part, only with our consent.  
© RECHNER Germany 04/2009 GB - Printed in EU, all rights reserved.

**Edition April 2009**

With publication of this catalogue all former printed catalogues about RECHNER KAS-26... series capacitive sensors are invalid.

# CAPACITIVE SENSORS - SERIES 26 WITH SEMICIRCULAR ACTIVE AREA

Capacitive sensors detect metals or non-metals, which exceed a certain capacity by approaching the active area. The higher the dielectric constant is of the material to be detected, the higher is the achievable sensing distance. A further relevant aspect for the sensing distance is the electronic circuit and the assembly of the sensor electrodes. These specific sensor or general brand type physical and electronic differences are the decisive parameters that affect quality and performance, and separate the average capacitive sensor from High Performance Sensors.

With this brochure we present you one of our high lights: the series 26 capacitive sensors.

The semicircular active area is a clear sign, that this is no common sensor. The special feature of these sensors is not only the semicircular construction, it is especially the high performance circuit and the optimal electrode form and electrode assembly.

The series 26 capacitive sensors are suitable for level control of most different products. They are used in the Semiconductor Industry, Chemical Industry and in the Food Industry. Therefore these sensors are available with different process connections, like 1", M22, Triclamp, with F30 fitting and with modified body sizes for standard plastic pipe fitting systems. There are models for 10...35 V DC and for 20...250 V AC / DC. To complete this range there are models with ATEX certificate for use in areas with danger of explosion, dust zone 20 or gas zone 1.

## HOUSING MATERIAL

The plastic materials used for the housings of the sensors are suitable for applications in the food and pharmaceutical industry:

- PTFE (polytetrafluor ethylene) (FDA 21 CFR 177.1550)
- PEEK (Polyetheretherketon) (FDA 21 CFR 177.2415)
- PP (Polypropylen) (FDA 21 CFR 177.1520)

The versions for ambient temperature of +100°C are capable of CIP (Cleaning In Process) up to 121 °C. Cleaning or sterilization is permitted within this temperature range for parts that are in contact with the products.


## NON FLUSH MOUNTING

All sensors shown in this brochure are for non-flush mounting. That means they are designed for applications where the active area of the sensor is in contact with the material to be detected.

With this kind of level control the sensor head (active area) is completely immersed into the powder, granulate or liquid.

These capacitive sensors are well accepted as sensors that are reliable, and there are a large number of versions to suit many applications in the processing industry and throughout mechanical engineering. Nowadays they are indispensable.

For further information about capacitive sensors please take from our main catalogue or from our web site [www.rechner-sensors.com](http://www.rechner-sensors.com).



## CAPACITIVE SENSORS Series 26

Housing

Ø 20,3 mm

Ø 22 mm




Technical data	Non-flush mountable	Non-flush mountable
Sensing distance $S_n$	5 mm	5 mm
Sensing distance min./max. adjustable	0...20 mm	0...20 mm
	<b>Type description</b>	<b>Art.-No.</b>
<b>Type NPN antivalent</b>	<b>KAS-70-26-A-M22-M30-PTFE</b>	-
<b>Type PNP antivalent</b>	<b>KAS-80-26-A-M22-M30-PTFE</b>	<b>KA 0431</b>
Certificates	CE, RoHS, UL-CSA	CE, RoHS, UL-CSA
Operating voltage ( $U_b$ )	10...35 V DC	10...35 V DC
Output current ( $I_o$ )	2 x 250 mA	2 x 250 mA
No load current ( $I_o$ )	< 15 mA	< 15 mA
Frequency of operating cycles max.	50 Hz	50 Hz
Permitted ambient temperature	-25...+70 °C / CIP 121 °C (zero-current)	-25...+100 °C / CIP 121 °C (zero-current)
LED display	Yes	Yes
Protective circuit	Yes	Yes
Norm	IEC 60947-5-2	IEC 60947-5-2
Degree of protection IEC 60529*	IP 67**	IP 67*
Connection	3 m cable, PVC, 4 x 0,5 mm <sup>2</sup>	Connector M 12 x 1
Housing material	PTFE (FDA 21 CFR 177.1550)	PTFE (FDA 21 CFR 177.1550)
Active surface	PTFE (FDA 21 CFR 177.1550)	PTFE (FDA 21 CFR 177.1550)
Lid	PTFE (FDA 21 CFR 177.1550)	PEEK (FDA 21 CFR 177.2415)




\*With sealed potentiometer screw

\*\*IP 68 with use of the protection set, see page 17

NPN Antivalent



PNP Antivalent

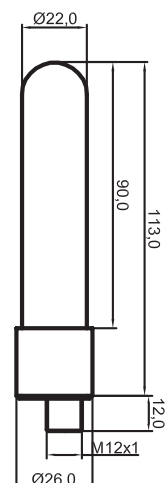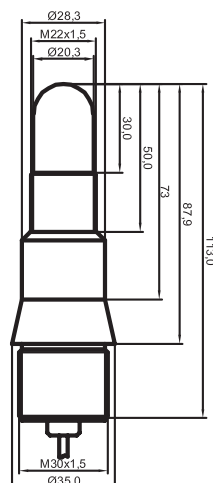

## CAPACITIVE SENSORS Series 26

Ø 26 mm






Ø 26 mm



Ø 26 mm



Non-flush mountable		Non-flush mountable		Non-flush mountable	
5 mm		5 mm		5 mm	
0...20 mm		0...20 mm		0...20 mm	
Type description	Art.-No.	Type description	Art.-No.	Type description	Art.-No.
KAS-70-26-A-PTFE-M30-Y5	-	KAS-70-26-A-PTFE-1"	-	KAS-70-26-A-PTFE-1"-Y5	-
KAS-80-26-A-PTFE-M30-Y5	KA 0689	KAS-80-26-A-PTFE-1"	813 100	KAS-80-26-A-PTFE-1"-Y5	KA 0642
CE, RoHS, UL-CSA		CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
10...35 V DC		10...35 V DC		10...35 V DC	
2 x 250 mA		2 x 250 mA		2 x 250 mA	
< 15 mA		< 15 mA		< 15 mA	
50 Hz		50 Hz		50 Hz	
-25...+70 °C / CIP 121 °C (zero-current)		-25...+70 °C / CIP 121 °C (zero-current)		-25...+70 °C / CIP 121 °C (zero-current)	
Yes		Yes		Yes	
Yes		Yes		Yes	
IEC 60947-5-2		IEC 60947-5-2		IEC 60947-5-2	
IP 67*		IP 67*		IP 67*	
Connector M 12 x 1		2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		Connector M 12 x 1	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
PA / PPO		PA / PPO		PA / PPO	

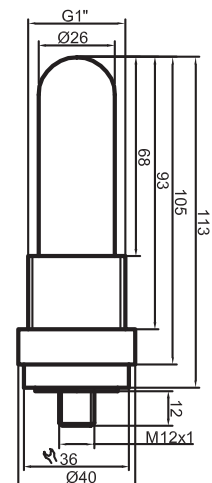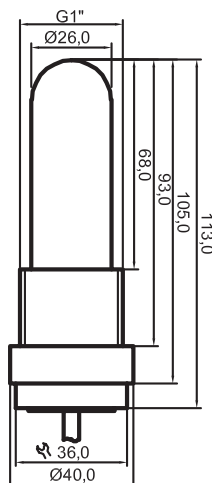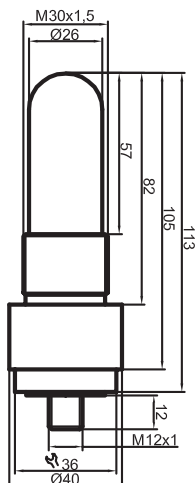

## CAPACITIVE SENSORS Series 26

Housing

Ø 26 mm


Ø 26 mm






Technical data	Non-flush mountable		Non-flush mountable	
Sensing distance $S_n$	5 mm		5 mm	
Sensing distance min./max. adjustable	0...20 mm		0...20 mm	
	Type description	Art.-No.	Type description	Art.-No.
Type NPN antivalent	KAS-70-26-A-PTFE-1"-100°C	-	KAS-70-26-A-PTFE-1"-100°C-Y5	-
Type PNP antivalent	KAS-80-26-A-PTFE-1"-100°C	KA 0277	KAS-80-26-A-PTFE-1"-100°C-Y5	KA 0688
Certificates	CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
Operating voltage ( $U_B$ )	10...35 V DC		10...35 V DC	
Output current ( $I_o$ )	2 x 250 mA		2 x 250 mA	
No load current ( $I_o$ )	< 15 mA		< 15 mA	
Frequency of operating cycles max.	50 Hz		50 Hz	
Permitted ambient temperature	-25...+100 °C / CIP 121 °C (zero-current)		-25...+100 °C / CIP 121 °C (zero-current)	
LED display	Yes		Yes	
Protective circuit	Yes		Yes	
Norm	IEC 60947-5-2		IEC 60947-5-2	
Degree of protection IEC 60529*	IP 67*		IP 67*	
Connection	2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		Connector M 12 x 1	
Housing material	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Active surface	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Lid	PA / PPO		PA / PPO	

\*With sealed potentiometer screw

NPN Antivalent



PNP Antivalent

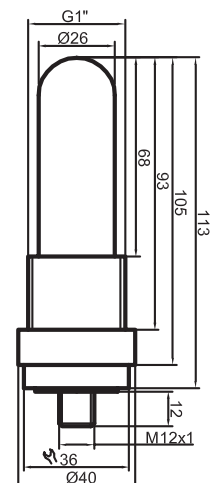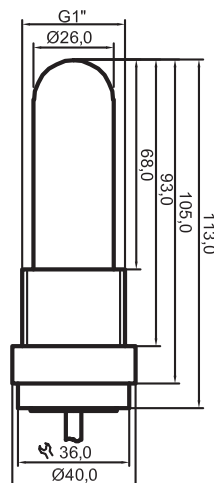

## CAPACITIVE SENSORS Series 26

Ø 26 mm



Ø 26 mm






Ø 26 mm



Non-flush mountable		Non-flush mountable		Non-flush mountable	
5 mm		5 mm		5 mm	
0...20 mm		0...20 mm		0...20 mm	
Type description	Art.-No.	Type description	Art.-No.	Type description	Art.-No.
KAS-70-26-A-PTFE-1"-CIP160	-	KAS-70-26-A-200-PTFE-1"	-	KAS-70-26-A-200-PTFE-1"-Y5	-
KAS-80-26-A-PTFE-1"-CIP160	KA 0647	KAS-80-26-A-200-PTFE-1"	KA 0653	KAS-80-26-A-200-PTFE-1"-Y5	KA 0686
CE, RoHS, UL-CSA		CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
10...35 V DC		10...35 V DC		10...35 V DC	
2 x 250 mA		2 x 250 mA		2 x 250 mA	
< 15 mA		< 15 mA		< 15 mA	
50 Hz		50 Hz		50 Hz	
-25...+70 °C / CIP 160 °C (zero-current)		-25...+70 °C / CIP 121 °C (zero-current)		-25...+70 °C / CIP 121 °C (zero-current)	
Yes		Yes		Yes	
Yes		Yes		Yes	
IEC 60947-5-2		IEC 60947-5-2		IEC 60947-5-2	
IP 67*		IP 67**		IP 67*	
2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		Connector M 12 x 1	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
PA / PPO		PC		PA / PPO	

\*\*IP 68 with use of the protection set, see page 17

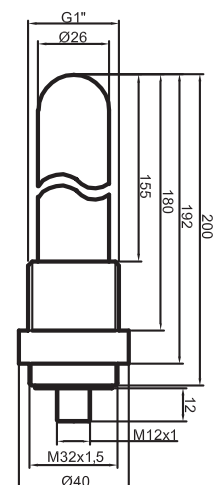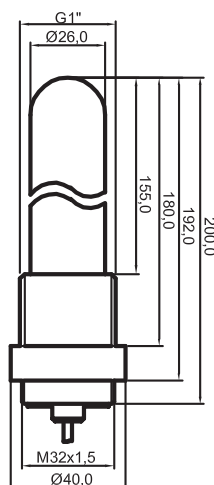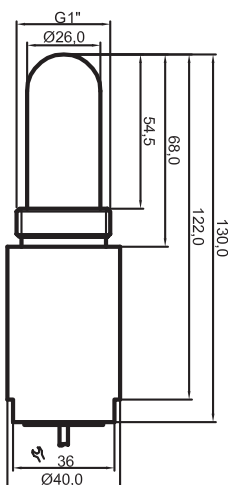

## CAPACITIVE SENSORS *Series 26*

Housing

Ø 26 mm


Ø 26 mm






Technical data	Non-flush mountable		Non-flush mountable	
Sensing distance $S_n$	5 mm		5 mm	
Sensing distance min./max. adjustable	0...20 mm		0...20 mm	
	Type description	Art.-No.	Type description	Art.-No.
Type NPN antivalent	KAS-70-26-A-200-PTFE-1"-100°C-Y5	-	KAS-70-26-A-300-PTFE-1"-Y5	-
Type PNP antivalent	KAS-80-26-A-200-PTFE-1"-100°C-Y5	KA 0687	KAS-80-26-A-300-PTFE-1"-Y5	KA 0682
Certificates	CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
Operating voltage ( $U_b$ )	10...35 V DC		10...35 V DC	
Output current ( $I_o$ )	2 x 250 mA		2 x 250 mA	
No load current ( $I_o$ )	< 15 mA		< 15 mA	
Frequency of operating cycles max.	50 Hz		50 Hz	
Permitted ambient temperature	-25...+100 °C / CIP 121 °C (zero-current)		-25...+70 °C / CIP 121 °C (zero-current)	
LED display	Ja		Ja	
Protective circuit	Ja		Ja	
Norm	IEC 60947-5-2		IEC 60947-5-2	
Degree of protection IEC 60529*	IP 67**		IP 67*	
Connection	Connector M 12 x 1		Connector M 12 x 1	
Housing material	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Active surface	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Lid	PA / PPO		PA / PPO	

\*With sealed potentiometer screw

NPN Antivalent



PNP Antivalent

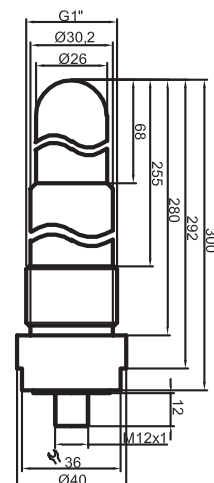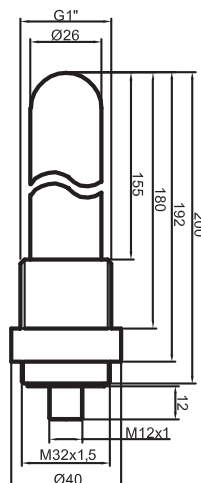

## CAPACITIVE SENSORS Series 26

Ø 26 mm






Ø 26 mm



Ø 25,5 mm



Non-flush mountable		Non-flush mountable		Non-flush mountable	
5 mm		5 mm		5 mm	
0...20 mm		0...20 mm		0...20 mm	
Type description	Art.-No.	Type description	Art.-No.	Type description	Art.-No.
KAS-70-26-A-PTFE-Tri-100°C	-	KAS-70-26-A-PTFE-Tri-100°C-Y5	-	KAS-70-26-A-PTFE-PFS2	-
KAS-80-26-A-PTFE-Tri-100°C	KA 0415	KAS-80-26-A-PTFE-Tri-100°C-Y5	KA 0662	KAS-80-26-A-PTFE-PFS2	KA 0566
CE, RoHS, UL-CSA		CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
10...35 V DC		10...35 V DC		10...35 V DC	
2 x 250 mA		2 x 250 mA		2 x 250 mA	
< 15 mA		< 15 mA		< 15 mA	
50 Hz		50 Hz		50 Hz	
-25...+100 °C / CIP 121 °C (zero-current)		-25...+100 °C / CIP 121 °C (zero-current)		-25...+100 °C / CIP 121 °C (zero-current)	
Ja		Ja		Ja	
Ja		Ja		Ja	
IEC 60947-5-2		IEC 60947-5-2		IEC 60947-5-2	
IP 67*		IP 67*		IP 67*	
2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		Connector M 12 x 1		2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
PA / PPO		PA / PPO		PA / PPO	
Accessories, see page 17		Accessories, see page 17		Accessories, see page 17	

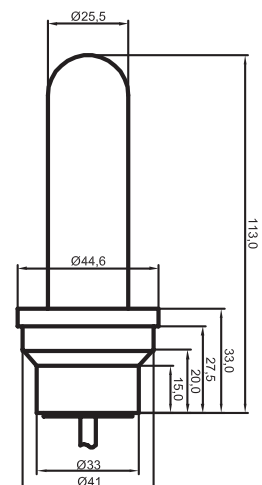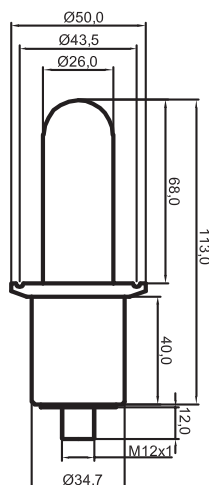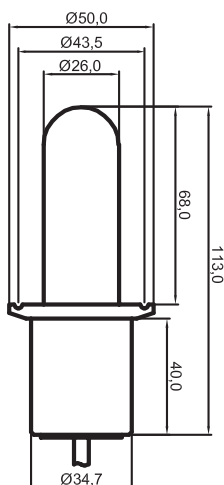

## CAPACITIVE SENSORS Series 26

Housing

Ø 26 mm

Ø 26 mm




Technical data	Non-flush mountable		Non-flush mountable	
Sensing distance $S_n$	5 mm		5 mm	
Sensing distance min./max. adjustable	0...20 mm		0...20 mm	
	Type description	Art.-No.	Type description	Art.-No.
Type NPN antivalent	KAS-70-26-A-PTFE-PFS1-Y5	-	KAS-70-26-A-PEEK-1"-HG-Y5	-
Type PNP antivalent	KAS-80-26-A-PTFE-PFS1-Y5	KA 0549	KAS-80-26-A-PEEK-1"-HG-Y5	KA 0764
Certificates	CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
Operating voltage ( $U_b$ )	10...35 V DC		10...35 V DC	
Output current ( $I_o$ )	2 x 250 mA		2 x 250 mA	
No load current ( $I_o$ )	< 15 mA		< 15 mA	
Frequency of operating cycles max.	50 Hz		50 Hz	
Permitted ambient temperature	-25...+100 °C / CIP 121 °C (zero-current)		-25...+70 °C / CIP 121 °C (zero-current)	
LED display	Yes		Yes	
Protective circuit	Yes		Yes	
Norm	IEC 60947-5-2		IEC 60947-5-2	
Degree of protection IEC 60529*	IP 67*		IP 67*	
Connection	Connector M 12 x 1		Connector M 12 x 1	
Housing material	PTFE (FDA 21 CFR 177.1550)		PEEK (FDA 21 CFR 177.2415)	
Active surface	PTFE (FDA 21 CFR 177.1550)		PEEK (FDA 21 CFR 177.2415)	
Lid	PA / PPO		PA / PPO	

\*With sealed potentiometer screw




Accessories, see page 17

Accessories, see page 18

NPN Antivalent




PNP Antivalent

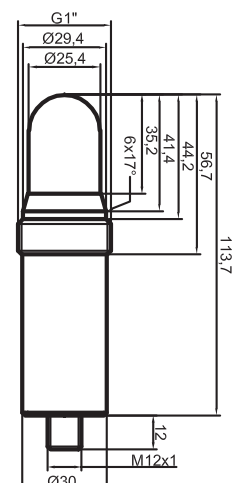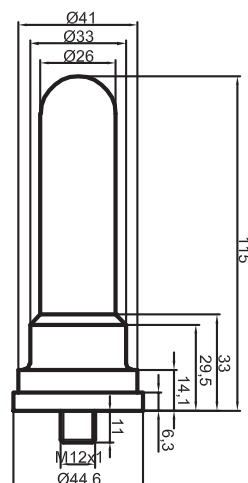

# CAPACITIVE SENSORS NAMUR Series 26 ATEX



Housing

Ø 26 mm



<b>Technical data</b>	Non-flush mountable	
Sensing distance Sn	5 mm	
Sensing distance min./max. adjustable	0...15 mm	
	<b>Type description</b>	<b>Art.-No.</b>
<b>Type</b>	<b>KAS-40-26-N-PTFE-1"</b>	<b>KA 0740</b>
Certificates	CE, RoHS UL-CSA	
ATEX Certificate No.	DMT 03 ATEX E 048	
ATEX	Ex II 2 G EEx ia IIC T1-T6	
IECEX Certificate No.	IECEX BVS 07.0031	
IECEX	Ex ia IIC T1 - T6	
Operating voltage (U <sub>b</sub> )	U <sub>i</sub> = 15 V DC	
Output current active surface free	< typ. 1,5 mA	
Output current active surface covered	> typ. 3 mA	
Self-inductance (L)	0,2 mH	
Frequency of operating cycles max.	50 Hz	
Permitted ambient temperature	0...+70 °C	
LED display	Yes	
Protective circuit	Yes	
Norm	IEC 60947-5-6	
Degree of protection IEC 60529*	IP 67*	
Connection	2 m cable, PUR, 2 x 0,75 mm <sup>2</sup>	
Housing material	PTFE (FDA 21 CFR 177.1550)	
Active surface	PTFE (FDA 21 CFR 177.1550)	
Lid	PA / PPO	

\*With sealed potentiometer screw

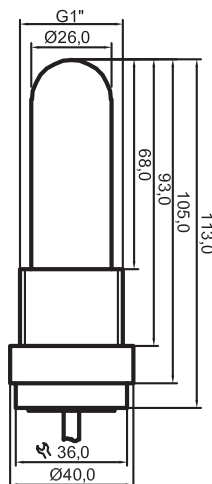

## CAPACITIVE SENSORS Series 26 ATEX StEx

Housing





Ø 26 mm

Ø 26 mm



Technical data	Non-flush mountable		Non-flush mountable	
Sensing distance S <sub>n</sub>	5 mm		5 mm	
Sensing distance min./max. adjustable	0...20 mm		0...20 mm	
	Type description	Art.-No.	Type description	Art.-No.
Type NPN antivalent	KAS-70-26-A-PTFE-1"-StEx-N	-	KAS-70-26-A-PTFE-1"-Y5-StEx-N	-
Type PNP antivalent	KAS-80-26-A-PTFE-1"-StEx-N	KA 0264	KAS-80-26-A-PTFE-1"-Y5-StEx-N	KA 0655
Certificates	CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
ATEX Certificate No.	DMT 01 ATEX E 157		DMT 01 ATEX E 157	
ATEX	Ex II 1/2D IP67 T 101 °C Ex II 2G EEx m II T4		Ex II 1/2D IP67 T 101 °C Ex II 2G EEx m II T4	
IECEX Certificate No.	IECEX BVS 07.0015		IECEX BVS 07.0015	
IECEX	Ex tD A20/21 IP67 T 101 °C Ex mb II T4		Ex tD A20/21 IP67 T 101 °C Ex mb II T4	
Operating voltage (U <sub>b</sub> )	10...30 V DC		10...30 V DC	
Output current (I <sub>o</sub> )	2 x 150 mA		2 x 150 mA	
No load current (I <sub>o</sub> )	Typ. 15 mA		Typ. 15 mA	
Frequency of operating cycles max.	50 Hz		50 Hz	
Permitted ambient temperature	-25...+90 °C		-25...+90 °C	
LED display	Yes		Yes	
Protective circuit	Yes		Yes	
Norm	IEC 60947-5-2		IEC 60947-5-2	
Degree of protection IEC 60529*	IP 67*		IP 67*	
Connection	2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		Connector M 12 x 1	
Housing material	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Active surface	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Lid	PC		PC	

\*With sealed potentiometer screw

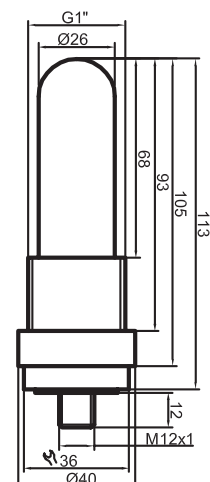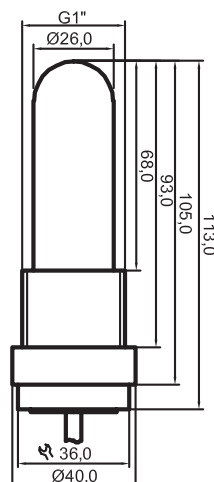

## CAPACITIVE SENSORS Series 26 ATEX StEx

Ø 26 mm



Ø 26 mm



Ø 26 mm






Non-flush mountable		Non-flush mountable		Non-flush mountable	
5 mm		5 mm		5 mm	
0...20 mm		0...20 mm		0...20 mm	
Type description	Art.-No.	Type description	Art.-No.	Type description	Art.-No.
KAS-70-26-A-200-PTFE-1"-StEx-N	-	KAS-70-26-A-PTFE-Tri-StEx-N	-	KAS-70-26-A-PEEK-1"-HG-Y5-StEx-N	-
KAS-80-26-A-200-PTFE-1"-StEx-N	KA 0444	KAS-80-26-A-PTFE-Tri-StEx-N	KA 0421	KAS-80-26-A-PEEK-1"-HG-Y5-StEx-N	KA 0767
CE, RoHS, UL-CSA		CE, RoHS, UL-CSA		CE, RoHS, UL-CSA	
DMT 01 ATEX E 157		DMT 01 ATEX E 157		DMT 01 ATEX E 157	
Ex II 1/2D IP67 T 101 °C Ex II 2G EEx m II T4		Ex II 1/2D IP67 T 101 °C Ex II 2G EEx m II T4		Ex II 1/2D IP67 T 101 °C Ex II 2G EEx m II T4	
IECEX BVS 07.0015		IECEX BVS 07.0015		IECEX BVS 07.0015	
Ex tD A20/21 IP67 T 101 °C Ex mb II T4		Ex tD A20/21 IP67 T 101 °C Ex mb II T4		Ex tD A20/21 IP67 T 101 °C Ex mb II T4	
10...30 V DC		10...30 V DC		10...30 V DC	
2 x 150 mA		2 x 150 mA		2 x 150 mA	
Typ. 15 mA		Typ. 15 mA		Typ. 15 mA	
50 Hz		50 Hz		50 Hz	
-25...+90 °C		-25...+90 °C		-25...+90 °C	
Yes		Yes		Yes	
Yes		Yes		Yes	
IEC 60947-5-2		IEC 60947-5-2		IEC 60947-5-2	
IP 67**		IP 67*		IP 67*	
2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		2 m cable, PVC, 4 x 0,5 mm <sup>2</sup>		Connector M 12 x 1	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PEEK (FDA 21 CFR 177.2415)	
PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)		PEEK (FDA 21 CFR 177.2415)	
PC		PC		PC	

\*\*IP 68 with use of the protection set, see page 17

Accessories, see page 17

Accessories, see page 18

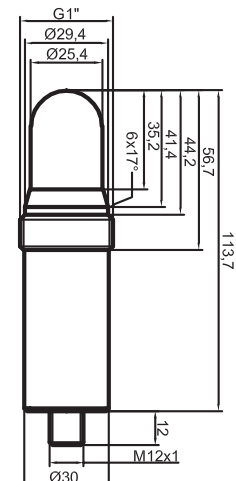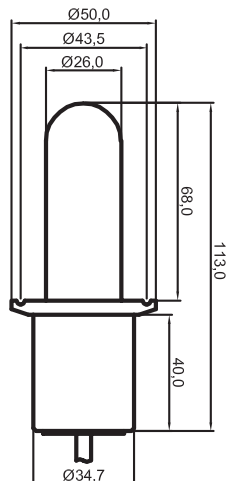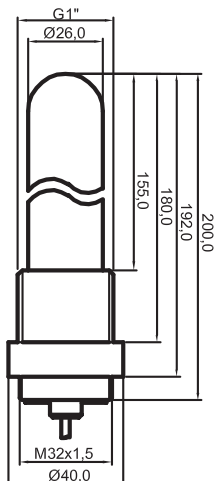

## CAPACITIVE SENSORS AC / DC Series 26

Housing


Ø 26 mm

Ø 26 mm






Technical data	Non-flush mountable		Non-flush mountable	
Sensing distance $S_n$	5 mm		5 mm	
Sensing distance min./max. adjustable	0...15 mm		0...15 mm	
	Type description	Art.-No.	Type description	Art.-No.
Type AC/DC normally open	KAS-90-26-S-PTFE-1"	KA 0409	KAS-90-26-S-PTFE-1"-Y1	KA 0639
Type AC/DC normally closed	KAS-90-26-Ö-PTFE-1"	KA 0685	KAS-90-26-Ö-PTFE-1"-Y1	-
Certificate	CE, RoHS		CE, RoHS	
Operating voltage ( $U_b$ )	20...250 V AC / DC		20...250 V AC / DC	
Output current ( $I_o$ )	250 mA		250 mA	
No load current ( $I_o$ )	Typ. 2,5 mA		Typ. 2,5 mA	
Load current min.	5 mA		5 mA	
Frequency of operating cycles max.	25 Hz		25 Hz	
Permitted ambient temperature	-25...+70 °C CIP 121 °C (zero-current)		-25...+70 °C CIP 121 °C (zero-current)	
LED display	Yes		Yes	
Protective circuit	Yes		Yes	
Norm	IEC 60947-5-2		IEC 60947-5-2	
Degree of protection IEC 60529*	IP 67*		IP 67*	
Connection	2 m cable, PUR, 2 x 0,75 mm <sup>2</sup>		Connector M 12 x 1	
Housing material	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Active surface	PTFE (FDA 21 CFR 177.1550)		PTFE (FDA 21 CFR 177.1550)	
Lid	PA / PPO		PA / PPO	

AC - normally open (NO)





AC - normally closed (NC)

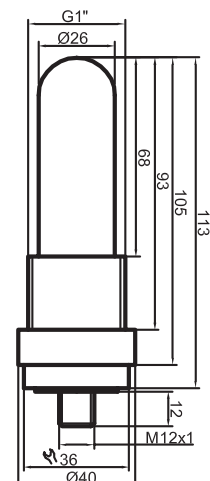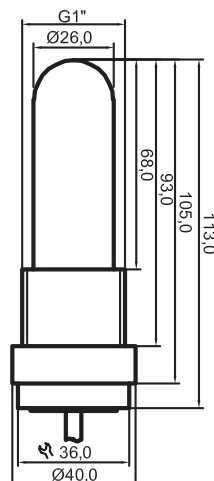


**CAPACITIVE SENSORS AC / DC Series 26**

**Ø 26 mm**



Non-flush mountable			
5 mm			
0...15 mm			
<b>Type description</b>	<b>Art.-No.</b>		
KAS-90-26-S-PTFE-Tri	KA 0684		
KAS-90-26-Ö-PTFE-Tri	KA 0683		
CE, RoHS			
20...250 V AC / DC			
250 mA			
Typ. 2,5 mA			
5 mA			
25 Hz			
-25...+70 °C CIP 121 °C (zero-current)			
Yes			
Yes			
IEC 60947-5-2			
IP 67*			
2 m cable, PUR, 2 x 0,75 mm <sup>2</sup>			
PTFE (FDA 21 CFR 177.1550)			
PTFE (FDA 21 CFR 177.1550)			
PA / PPO			

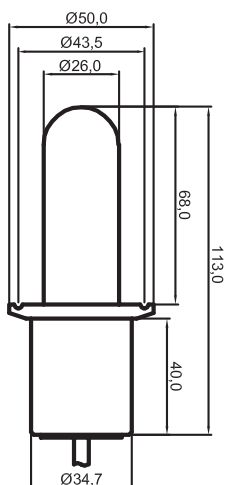



All specifications are subject to change without notice. (04/2009)




## Capacitive Sensors - Series 26 Series 70 - NPN Series 80 - PNP **EasyTeach**

Housing  $\varnothing = 26 \text{ mm} / 1\frac{1}{2}"$

- Housing material: PP / PBT
- Level sensor with EasyTeach function
- Clear text display
- Suitable for food and pharmaceutical applications  
Plastic part (PP) which will be in contact with the product to be detected is FDA conforme (Code of Federal Regulation, title 21, chapter 1, part 177.1520)
- SIP / CIP 121° C
- Sensor length max. 2000 mm.



Sensor length „X“ (mm)	Type NPN	Art-No.	Type PNP	Art-No.
200	KAS-70-26-A-200-PP-1½ "-PH-ET	KA0781	KAS-80-26-A-200-PP-1½ "-PH-ET	KA0780
280	KAS-70-26-A-280-PP-1½ "-PH-ET	KA0776	KAS-80-26-A-280-PP-1½ "-PH-ET	KA0758
400	KAS-70-26-A-400-PP-1½ "-PH-ET	KA0783	KAS-80-26-A-400-PP-1½ "-PH-ET	KA0782
800	KAS-70-26-A-800-PP-1½ "-PH-ET	KA0785	KAS-80-26-A-800-PP-1½ "-PH-ET	KA0784
1200	KAS-70-26-A-1200-PP-1½ "-PH-ET	KA0787	KAS-80-26-A-1200-PP-1½ "-PH-ET	KA0786

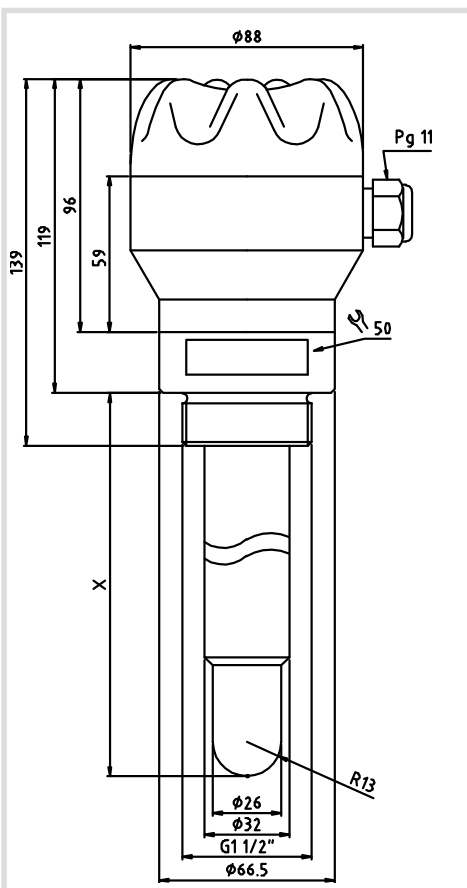

Certificate:



Technical data

Non-flush mountable

Operating distance $S_n$	5 mm
Operating distance min./max. adjustable	0...20 mm
Electrical version	4-pin DC
Output	Antivalent (NO + NC)
Operating voltage ( $U_b$ )	10...35 V DC
Output current max. ( $I_o$ )	2 x 250 mA
Voltage drop max. ( $U_d$ )	$\leq 2.0 \text{ V}$
Permitted residual ripple max.	10%
No-load current ( $I_o$ )	Typ. 10 mA
Frequency of operating cycles max.	2 Hz
Permitted ambient temperature	0...+70° C/ Sensor CIP 121° C (zero-current)
LCD-display	Reflective
Protective circuit	Built-in
Degree of protection IEC 60529 - Sensor	IP 68
Degree of protection IEC 60529 - Connection head	IP 65
Norm	EN 60947-5-2
Connection	Screw terminals 1,5 mm <sup>2</sup>
Housing material	PP
Active surface	PP
Connection head	PBT glasfibre reinforced

## Accessories



**Protection set M30 - Art.-Nr. 196302**  
**M32 - Art.-Nr. 196301**

The PTFE protection set M32 x 1.5 consists of an internally threaded cover, a Pg9-screwing for cable entry and a rubber gasket between the cover and the sensor. This protection cover serves as improvement to the degree of protection, against infiltration of liquids, for example in applications where the sensor is totally immersed in liquids. The resistance of the material still needs to be checked.

The thread of the sensor has to be sealed, for example with PTFE sealing-tape. The protection cover has to be screwed totally up to the end, and then the Pg9-screw has to be fixed.

Protection set, M30 suitable for KAS-70-26-A-M22-M30-PTFE or KAS-80-26-A-M22-M30-PTFE.

M32 suitable for KAS-70-26-A-200-PTFE-1", KAS-80-26-A-200-PTFE-1", KAS-70-26-A-200-PTFE-1"-SiEx-N or KAS-80-26-A-200-PTFE-1"-SiEx-N



Stainless steel welding nipple DN 25  
Article No. 190 751

Sealing gasket  
Article No. 190 752

Triclamp mounting clamp  
Article No. 190 750



Stainless steel welding nipple, suitable for all our capacitive sensors KAS-70- or KAS-80-26-A-PTFE-Tri, KAS-70 or KAS-80-26-A-PTFE-Tri-100°C



Plastic tube fitting systems

PP tube da 32 SDR 11, L = 2000 mm  
with already welded screw connection on one side  
Article No. 196 360

PP union nut da 32 / 1 1/2"  
Article No. 196 361

O-ring EPDM, suitable for union nut da 32  
Article No. 196 362



Plastic tube fitting system, suitable for Type KAS-70- or KAS-80-26-A-PTFE-PFS1-Y5



Plastic tube fitting systems

PP / EPDM Screwing da 32 SDR with sealing gasket  
Article No. 196 363

PP union nut da 32 / 1 1/2"  
Article No. 196 361




Plastic tube fitting system, suitable for Type KAS-70- or KAS-80-26-A-PTFE-PFS2

## WELDED SOCKET G1“

For container and tubes



Type	Art. No.
AP 35	196368



Type	Art. No.
BP 35	196369

## MILK TUBE FITTING ACCORDING TO DIN 11851 G1“

Cone nut



Type	Art. No.
FP 35 - DN 40	196371
GP 35 - DN 50	196372
LP 35 - DN 65	186373

Coupling nut



Type	Art. No.
FÜ 15 - DN 40	196374
GÜ 15 - DN 50	196375
LÜ 15 - DN 65	186376

Varivent



Type	Art. No.
HP35 - DN50 Type N	196377
IP 35 - DN 25 Type F	196378

DRD flange

Triclamp



Type	Art. No.
TP 35	196379

DRD-Flange



Type	Art. No.
GA 35	196380

## SEALING PLUG G1“

Sealing plug



Type	Art. No.
VES35	196381

Welding plug



Type	Art. No.
ESS35	196382

Profiler tool



Type	Art. No.
EMZ-352	196383

## TYPE SELECTION IN ARTICLE NUMBER ORDER

Art. No.	Description	Page
190750	Triclamp mounting clamp (Tri)	17
190751	Welding nipple (Tri)	17
190752	Gasket (Tri)	17
196301	Sealing set M32	17
196302	Sealing set M30	17
196360	PP Tube L = 2 m (PFS1)	17
196361	PP Union nut (PFS1 + PFS2)	17
196362	O-Ring EFDM (PFS1 + PFS2)	17
196363	PP Screwing D = 32 (PFS2)	17
196368	AP 35	18
196369	BP 35	18
196371	FP 35 - DN 40	18
196372	GP 35 - DN 50	18
196373	LP 35 - DN 65	18
196374	FÜ 15 - DN 40	18
196375	GÜ 15 - DN 50	18
196376	LÜ 15 - DN 65	18
196377	HP 35 - DN 50 Typ N, Varivent	18
196378	IP 35 - DN 25 Typ N, Varivent	18
196379	TP 35, Triclamp	18
196380	GA 35	18
196381	VES 35	18
196382	ESS 35	18
196383	EMZ-352	18
813100	KAS-80-26-A-PTFE-1"	5
KA...	KAS-70-26/22-A-PTFE-100°C-Y5	4
KA...	KAS-70-26-A-200-PTFE-1"	7
KA...	KAS-70-26-A-200-PTFE-1"-StEx-N	13

Art. No.	Description	Page
KA...	KAS-70-26-A-200-PTFE-1"-Y5	7
KA...	KAS-70-26-A-200-PTFE-1"-100°C-Y5	8
KA...	KAS-70-26-A-300-PTFE-1"-Y5	8
KA...	KAS-70-26-A-M22-M30-PTFE	4
KA...	KAS-70-26-A-PEEK-1"-HG-Y5	10
KA...	KAS-70-26-A-PEEK-1"-HG-Y5-StEx-N	13
KA...	KAS-70-26-A-PTFE-1"	5
KA...	KAS-70-26-A-PTFE-1"-100°C	6
KA...	KAS-70-26-A-PTFE-1"-100°C-Y5	6
KA...	KAS-70-26-A-PTFE-1"-CIP160	7
KA...	KAS-70-26-A-PTFE-1"-Y5	5
KA...	KAS-70-26-A-PTFE-1"-Y5-StEx-N	12
KA...	KAS-70-26-A-PTFE-PFS1-Y5	10
KA...	KAS-70-26-A-PTFE-M30-Y5	5
KA...	KAS-70-26-A-PTFE-Tri-100°C-Y5	9
KA...	KAS-70-26-A-PTFE-Tri-StEx-N	13
KA...	KAS-70-26-A-PTFE-1"-StEx-N	12
KA...	KAS-70-26-A-PTFE-PFS2	9
KA...	KAS-70-26-A-PTFE-Tri-100°C	9
KA0264	KAS-80-26-A-PTFE-1"-StEx-N	12
KA0277	KAS-80-26-A-PTFE-1"-100°C	6
KA0409	KAS-90-26-S-PTFE-1"	14
KA0415	KAS-80-26-A-PTFE-Tri-StEx-N	13
KA0415	KAS-80-26-A-PTFE-Tri-100°C	9
KA0431	KAS-80-26-A-M22-M30-PTFE	4
KA0444	KAS-80-26-A-200-PTFE-1"-StEx-N	13
KA0450	KAS-80-26/22-A-PTFE-100°C-Y5	4
KA0549	KAS-80-26-A-PTFE-PFS1-Y5	10

Art. No.	Description	Page
KA0566	KAS-80-26-A-PTFE-PFS2	9
KA0639	KAS-90-26-S-PTFE-1"-Y1	14
KA0642	KAS-80-26-A-PTFE-1"-Y5	5
KA0647	KAS-80-26-A-PTFE-1"-CIP160	7
KA0653	KAS-80-26-A-200-PTFE-1"	7
KA0655	KAS-80-26-A-PTFE-1"-Y5-StEx-N	12
KA0658	KAS-90-26-Ö-PTFE-1"	14
KA0662	KAS-80-26-A-PTFE-Tri-100°C-Y5	9
KA0682	KAS-80-26-A-300-PTFE-1"-Y5	8
KA0683	KAS-90-26-Ö-PTFE-Tri	15
KA0684	KAS-90-26-S-PTFE-Tri	15
KA0686	KAS-80-26-A-200-PTFE-1"-Y5	7
KA0687	KAS-80-26-A-200-PTFE-100°C-Y5	8
KA0688	KAS-80-26-A-PTFE-1"-100°C-Y5	6
KA0689	KAS-80-26-PTFE-M30-Y5	5
KA0740	KAS-40-26-N-PTFE-1"	11
KA0758	KAS-80-280-PP-1½"-PH-ET	16
KA0764	KAS-80-26-A-PEEK-1"-HG-Y5	10
KA0767	KAS-80-26-A-PEEK-1"-HG-Y5-StEx-N	13
KA0776	KAS-70-26-A-280-PP-1½"-PH-ET	16
KA0780	KAS-80-26-A-200-PP-1½"-PH-ET	16
KA0781	KAS-70-26-A-200-PP-1½"-PH-ET	16
KA0782	KAS-80-26-A-400-PP-1½"-PH-ET	16
KA0783	KAS-70-26-A-400-PP-1½"-PH-ET	16
KA0784	KAS-80-26-A-800-PP-1½"-PH-ET	16
KA0785	KAS-70-26-A-800-PP-1½"-PH-ET	16
KA0786	KAS-80-26-A-1200-PP-1½"-PH-ET	16
KA0787	KAS-70-26-A-1200-PP-1½"-PH-ET	16

## TYPE SELECTION IN DESCRIPTION ORDER

Art. No.	Description	Page
196302	Sealing Set M30	17
196301	Sealing Set M32	17
196368	AP 35	18
190750	Triclamp mounting clamp (Tri)	17
196369	BP 35	18
190752	Gasket (Tri)	17
190751	Welding nipple (Tri)	17
196383	EMZ-352	18
196382	ESS 35	18
196371	FP 35 - DN 40	18
196374	FÜ 15 - DN 40	18
196380	GA 35	18
196372	GP 35 - DN 50	18
196375	GÜ 15 - DN 50	18
196377	HP 35 - DN 50 Type N, Varivent	18
196378	IP 35 - DN 25 Type N, Varivent	18
KA0740	KAS-40-26-N-PTFE-1"	11
KA...	KAS-70-26/22-A-PTFE-100°C-Y5	4
KA0787	KAS-70-26-A-1200-PP-1½"-PH-ET	16
KA0781	KAS-70-26-A-200-PP-1½"-PH-ET	16
KA...	KAS-70-26-A-200-PTFE-1"	7
KA...	KAS-70-26-A-200-PTFE-1"-100°C-Y5	8
KA...	KAS-70-26-A-200-PTFE-1"-StEx-N	13
KA...	KAS-70-26-A-200-PTFE-1"-Y5	7
KA0776	KAS-70-26-A-280-PP-1½"-PH-ET	16
KA...	KAS-70-26-A-300-PTFE-1"-Y5	8
KA0783	KAS-70-26-A-400-PP-1½"-PH-ET	16
KA0785	KAS-70-26-A-800-PP-1½"-PH-ET	16

Art. No.	Description	Page
KA...	KAS-70-26-A-M22-M30-PTFE	4
KA...	KAS-70-26-A-PEEK-1"-HG-Y5	10
KA...	KAS-70-26-A-PEEK-1"-HG-Y5-StEx-N	13
KA...	KAS-70-26-A-PTFE-1"	5
KA...	KAS-70-26-A-PTFE-1"-100°C	6
KA...	KAS-70-26-A-PTFE-1"-100°C-Y5	6
KA...	KAS-70-26-A-PTFE-1"-CIP160	7
KA...	KAS-70-26-A-PTFE-1"-StEx-N	12
KA...	KAS-70-26-A-PTFE-1"-Y5	5
KA...	KAS-70-26-A-PTFE-1"-Y5-StEx-N	12
KA...	KAS-70-26-A-PTFE-PFS1-Y5	10
KA...	KAS-70-26-A-PTFE-PFS2	9
KA...	KAS-70-26-A-PTFE-Tri-100°C	9
KA...	KAS-70-26-A-PTFE-Tri-100°C-Y5	9
KA...	KAS-70-26-A-PTFE-Tri-StEx-N	13
KA...	KAS-70-26-A-PTFE-M30-Y5	5
KA0450	KAS-80-26/22-A-PTFE-100°C-Y5	4
KA0786	KAS-80-26-A-1200-PP-1½"-PH-ET	16
KA0780	KAS-80-26-A-200-PP-1½"-PH-ET	16
KA0653	KAS-80-26-A-200-PTFE-1"	7
KA0687	KAS-80-26-A-200-PTFE-1"-100°C-Y5	8
KA0444	KAS-80-26-A-200-PTFE-1"-StEx-N	13
KA0686	KAS-80-26-A-200-PTFE-1"-Y5	7
KA0758	KAS-80-26-A-280-PP-1½"-PH-ET	16
KA0682	KAS-80-26-A-300-PTFE-1"-Y5	8
KA0782	KAS-80-26-A-400-PP-1½"-PH-ET	16
KA0784	KAS-80-26-A-800-PP-1½"-PH-ET	16
KA0431	KAS-80-26-A-M22-M30-PTFE	4

Art. No.	Description	Page
KA0764	KAS-80-26-A-PEEK-1"-HG-Y5	10
KA0767	KAS-80-26-A-PEEK-1"-HG-Y5-StEx-N	13
813100	KAS-80-26-A-PTFE-1"	5
KA0277	KAS-80-26-A-PTFE-1"-100°C	6
KA0688	KAS-80-26-A-PTFE-1"-100°C-Y5	6
KA0647	KAS-80-26-A-PTFE-1"-CIP160	7
KA0264	KAS-80-26-A-PTFE-1"-StEx-N	12
KA0642	KAS-80-26-A-PTFE-1"-Y5	5
KA0655	KAS-80-26-A-PTFE-1"-Y5-StEx-N	12
KA0549	KAS-80-26-A-PTFE-PFS1-Y5	10
KA0566	KAS-80-26-A-PTFE-PFS2	9
KA0415	KAS-80-26-A-PTFE-Tri-100°C	9
KA0662	KAS-80-26-A-PTFE-Tri-100°C-Y5	9
KA0421	KAS-80-26-A-PTFE-Tri-StEx-N	13
KA0689	KAS-80-26-PTFE-M30-Y5	5
KA0658	KAS-90-26-Ö-PTFE-1"	14
KA...	KAS-90-26-Ö-PTFE-1"-Y1	14
KA0683	KAS-90-26-Ö-PTFE-Tri	15
KA0409	KAS-90-26-S-PTFE-1"	14
KA0639	KAS-90-26-S-PTFE-1"-Y1	14
KA0684	KAS-90-26-S-PTFE-Tri	15
196373	LP 35 - DN 65	18
196376	LÜ 15 - DN 65	18
196362	O-Ring EFDM (PFS1 + PFS2)	17
196360	PP Rohr L = 2 m (PFS1)	17
196361	PP union nut (PFS1 + PFS2)	17
196363	PP screwing D = 32 (PFS2)	17
196379	TP 35, Triclamp	18
196381	VES 35	18

# SENSORS FOR INDUSTRIAL AUTOMATION

## CAPACITIVE • INDUCTIVE MAGNETORESISTIVE CALORIMETRIC

Ask for further catalogues:

**CAPACITIVE SENSORS KAS**

**CAPACITIVE SENSORS KXS**

**CAPACITIVE LEVEL MEASURING SYSTEMS**

**INDUCTIVE SENSORS**

**MAGNETORESISTIVE SENSORS**

**POWER SUPPLIES AND CONTROLLERS**

**FLOW SENSORS**

**ATEX CERTIFIED PRODUCTS**

**Your Representative**



[www.hemomatik.se](http://www.hemomatik.se)

Ordertel 08-771 00 04 Våxel 08-771 02 20  
Orderfax 08-771 62 00 Teknisk 08-771 35 80  
Länna, S-142 50 SKOGÅS (Stockholm)

# RECHNER

INDUSTRIE-ELEKTRONIK GmbH

Gaußstraße 8-10 68623 Lampertheim Germany

Tel. (0 62 06) 50 07-0 Fax (0 62 06) 50 07-36 Fax Intl. +49 (0) 62 06 50 07-20

[www.rechner-sensors.com](http://www.rechner-sensors.com)

e-mail: [info@rechner-sensors.de](mailto:info@rechner-sensors.de)