

# UQ1A/G6-0E

cubic ultrasonic




Micro Detectors

Italian Sensors Technology



Indicative image

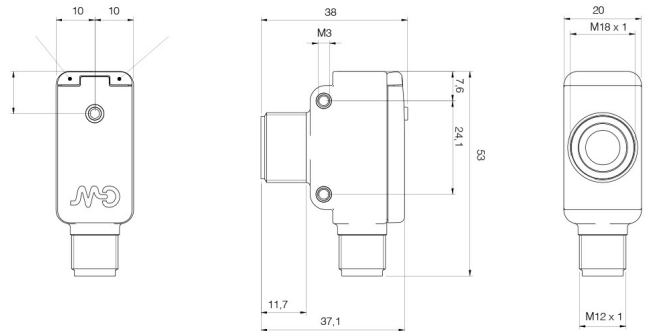

## Detection properties

Nominal sensing distance	300mm
Thermal drift of Sr	±5%
Resolution	3mm
Sensitivity adjustment	pulsante di Teach-in
Hysteresis	1%
thermal compensation	Yes
Minimum sensing distance (blind zone)	40mm
Linearity error	1%
Effective Aperture Angle	7° ± 2°

## Outputs

Output type PNP + uscita analogica in corrente 4...20mA

Output Function	NO/NC
Switching frequency	8Hz
Response time	400ms

## Electrical data

Operating Voltage	10 - 30Vdc
No-Load supply current	≤35mA
Load current	100mA
Leakage current	10µA @ 30Vcc
Output voltage drop	2,2Vmax. @ IL=100 mA
Max ripple content	5%
LED indicators	verde: echo - giallo: uscita
Short-circuit protection	si
Reverse Polarity Protection	si
Impulsive Overvoltage Protection	si

## Mechanical data

Dimensions	53x38x20mm
Connections	M12 Plug
Tightening torque	1Nm
Operating temperature	- 20°C...+ 70°C
Storage temperature	- 35°C...+ 80° C senza ghiaccio
Transducer Frequency	300kHz
Material	PBT

## Test/Approvals


Approvals	CE cULus
EMC compatibility	IEC 60947-5-2
Shocks and vibrations	IEC EN60947-5-2 / 7.4
Degree of protection	IP67

## Accessories

Supplied Accessories	1 M18x1 nut
----------------------	-------------

# RESPONSE CURVES

# Disassamento Parallelo

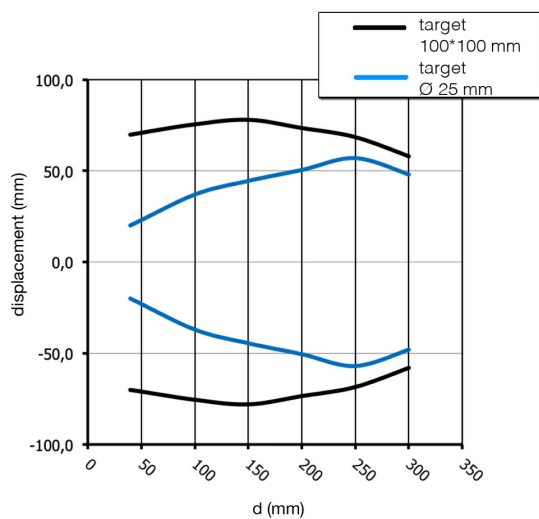

## M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235  
41122 Modena (MO)  
Tel. 059 420411  
Fax 059 253973  
E-mail [info@microdetectors.com](mailto:info@microdetectors.com)

## date of printing

03/07/2019 16:20:00

