


DRAW WIRE SENSOR

Links to further documents for this series:

[Installation guide](#)
[Manual for CANopen](#)
[Teach electronics Squeezer](#)
[Data sheet TEDS connector](#)

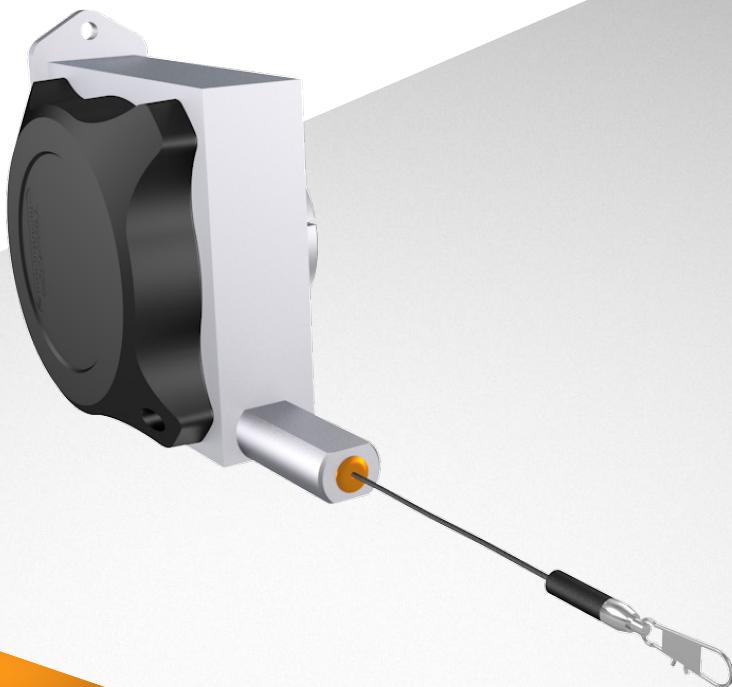

HM 2108

SX120 SERIES

Key-Features:

- Measurement ranges from 3000 to 5000 mm
- Analog output: potentiometer, voltage, current
- Optional teachable voltage outputs
- Digital Output Incremental: RS422 (TTL), Push-Pull
- Digital Output Absolute: CANopen, SSI, Profibus, EtherCAT, Profinet
- Linearity up to $\pm 0.02\%$ of full scale
- Protection class up to IP67
- Temperature range: -20...+85 °C (optional -40 °C or +120 °C)
- High dynamics and interference immunity factor
- Customised versions available
- Optional with TEDS connector

Content





| | |
|---|----|
| Technical Data Analog | 2 |
| Technical Data Incremental | 3 |
| Technical Data Digital WCAN | 4 |
| Technical Data Digital Absolute | 5 |
| Mechanical Data | 6 |
| Technical Drawing | 6 |
| Options | 8 |
| Accessories | 9 |
| Order Code | 10 |

TECHNICAL DATA ANALOG OUTPUT

| | | | | |
|------------------------------------|------|---|-------|------|
| Measurement range MR ¹⁾ | [mm] | 3000 | 4000 | 5000 |
| Linearity | [%] | | ±0.1 | |
| Improved linearity (optional) | [%] | | ±0.05 | |
| Resolution | | see output types below | | |
| Sensor element | | Hybrid Potentiometer | | |
| Connection | | connector output M12 or cable output axial (TPE cable) | | |
| Protection class | | IP65, optional IP67 | | |
| Humidity | | max. 90 % relative, no condensation | | |
| Temperature | | see output types below | | |
| Mechanical data | | extraction force, max. velocity and max. acceleration see „ Mechanical Data “ | | |
| Housing | | aluminium, anodised, spring case PA6 | | |
| Draw wire | | stainless steel V2A Ø 0.5 mm | | |
| Weight | [g] | 1300 to 1600, depending on the measurement range | | |

¹⁾ others on request

ELECTRICAL DATA ANALOG OUTPUT

| Output type | Potentiometer | | | Voltage ¹⁾ | | | | Current | Voltage (teachable) | | | |
|-----------------------------|---|------|-------|---|---------|-----------|---|--|---------------------|---|--|--|
| Order Code | 1R | 5R | 10R | 4,5V | 5V | ±5V | 10V | 420A | 5VT | 10VT | | |
| Output | 1 kΩ | 5 kΩ | 10 kΩ | 0.5...4.5 V | 0...5 V | -5...+5 V | 0...10 V | 4...20 mA | 0...5 V | 0...10 V | | |
| Supply | max. 30 V | | | 8...30 VDC | | | 12...30 VDC | 12...30 VDC ²⁾ | 8...35 VDC | | | |
| Recommended cursor current | <1 µA | | | - | | | | - | | | | |
| Current consumption max. | - | | | max. 25 mA (no load) | | | | - | | | | |
| Power consumption max. | - | | | | | | | | max. 200 mW | | | |
| Output current | - | | | max. 10 mA, min. load 10 kΩ | | | | max. 50 mA in case of error ³⁾ | | | | |
| Dynamics | - | | | <3 ms from 0...100 % and 100...0 % | | | | <1 ms from 0...100 % and 100...0 % | | | | |
| Resolution | theoretically unlimited, limited by the noise | | | | | | | | 1 mV | | | |
| Noise | depends on the quality of the power supply | | | 0.5 mV _{eff} | | | | 1.6 µA _{eff} | | | | |
| Inverse-polarity protection | - | | | yes | | | | - | | | | |
| Short-circuit proof | - | | | yes | | | | - | | | | |
| Operating temperature | -20...+85 °C / optional: -40...+85 °C or -20...+120 °C | | | -20...+85 °C / optional: -40...+85 °C | | | | - | | | | |
| Temperature coefficient | ±0.0025 %/K | | | 0.0037 %/K | | | | 0.0079 %/K | | | | |
| EMC | - | | | according to EN 61326-1:2013 | | | | - | | | | |
| Circuit |  | | |  | | |  | | |  | | |

¹⁾ Galvanically isolated

²⁾ Load: 250 Ω (max. 500 Ω)

³⁾ Load max. 0.5 kΩ



MFL = multi-functional line

TECHNICAL DATA DIGITAL OUTPUT INCREMENTAL

| | | | | |
|---------------------------------|-------------|--|-----------|------|
| Measurement range ¹⁾ | [mm] | 3000 | 4000 | 5000 |
| Linearity | [%] | | ±0.05 | |
| Improved linearity (optional) | [%] | ±0.02 (only in combination with resolution 6.3 pulses/mm, or higher) | | |
| Resolution ¹⁾ | [pulses/mm] | 0.3 / 3.1 / 6.3 / 15.7 (the resolution can be raised by the factor 4 using quadruple edge detection) | | |
| Z-pulse distance | [mm] | | 317.68 | |
| Sensor element | | Incremental-Encoder with optical code disk | | |
| Output signal | | A, B and Z pulse (plus inverted pulses /A, /B and /Z) | | |
| Connection | | connector output M12 radial or cable output radial (PVC cable) | | |
| Protection class | | IP65, optional IP67 | | |
| Humidity | | max. 90 % relative, no condensation | | |
| Operating temperature | [°C] | | -20...+85 | |
| Mechanical data | | extraction force, max. velocity and max. acceleration see „ Mechanical Data “ | | |
| Housing | | aluminium, anodised, spring case PA6 | | |
| Draw wire | | stainless steel V2A Ø 0.5 mm | | |
| Weight | [g] | 1300 to 1600, depending on the measurement range | | |

¹⁾ others on request

ELECTRICAL DATA DIGITAL OUTPUT INCREMENTAL

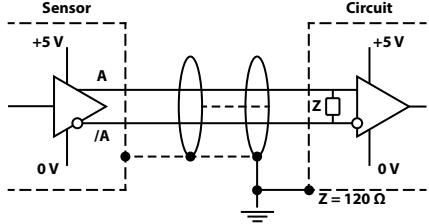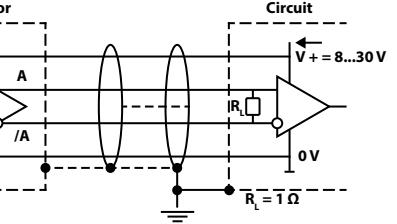
| Output type | | Line driver L RS422 (TTL compatible) | Push Pull G (HTL) |
|-------------------------------|-------|---|---|
| Supply +V | [VDC] | 5 ± 5 % | 10...30 |
| Current consumption (no load) | [mA] | max. 90 (typical 40) | max. 100 (typical 50) |
| Load / channel | [mA] | | max. ±20 |
| Pulse frequency | [kHz] | | max. 300 |
| Signal level high | [V] | min. 2.5 | min. +V -1 |
| Signal level low | [V] | | max. 0.5 |
| Recommended circuit | |  |  |

OUTPUT SIGNAL DIGITAL OUTPUT INCREMENTAL

Output signal

Pulses A and B are 90° phase-delayed (detection of direction). The Z-Pulse is emitted once per turn. The Z-Pulse distance is 317.68 mm (= circumference of the rope drum) and can be used as a reference mark.

(The diagram shows the signal without inverted signals; time line for return of rope.)

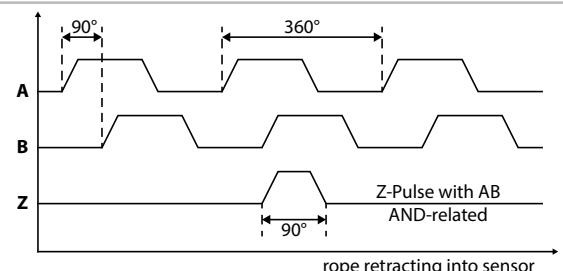

TECHNICAL DATA DIGITAL OUTPUT ABSOLUTE CANOPEN (WCAN)

| | | | | |
|-----------------------|------|---|------|------|
| Measurement range | [mm] | 3000 | 4000 | 5000 |
| Linearity | [%] | | ±0.1 | |
| Repeatability | [%] | | ±0.1 | |
| Resolution | | 0.002 % of the measurement range | | |
| Sensor element | | Potentiometer | | |
| Connection | | connector output M12 axial or cable output axial (TPE cable) | | |
| Protection class | | IP65, optional IP67 | | |
| Humidity | | max. 90 % relative, no condensation | | |
| Operating temperature | [°C] | -20...+85 / optional: -40...+85 | | |
| Mechanical data | | extraction force, max. velocity and max. acceleration see „ Mechanical Data “ | | |
| Housing | | aluminium, anodised, spring case PA6 | | |
| Draw wire | | stainless steel V2A Ø 0.5 mm | | |
| Weight | [g] | 1300 to 1600, depending on the measurement range | | |

ELECTRICAL DATA DIGITAL OUTPUT ABSOLUTE CANOPEN (WCAN)

| | | |
|-------------------------------------|-------|---|
| Link to the manual | | CANopen (WCAN) |
| CAN specification | | Full CAN 2.0B (ISO11898) |
| Communication profile | | CANopen CiA 301 V 4.2.0 |
| Device profile | | Encoder, absolute linear; CiA 406 V 3.2.0 |
| Error control | | Producer Heartbeat, Emergency Message, Node Guarding |
| Node ID | | Default: 7, configurable via SDO and Squeezer (offline configuration) ¹⁾ |
| PDO | | 1 x TPDO, static mapping |
| PDO Modes | | Event-triggered, Time-triggered, Sync-cyclic, Sync-acyclic |
| Transmission rate | | 1 Mbps, 800, 500, 250, 125, 50, 20 kbps configurable via SDO and Squeezer (offline configuration) ¹⁾ |
| Integrated Bus termination resistor | | 120 Ω, connectible via SDO and Squeezer (offline configuration) ¹⁾ |
| Bus, galvanic separation | | No |
| Supply | [VDC] | 8...30 |
| Current consumption | | 10 mA typical at 24 V, 20 mA typical at 12 V |
| Measurement rate | | 1 kHz with 16-bit resolution |
| Electrical protection | | inverse polarity protection |
| Temperature coefficient | [%/K] | 0.0014 |
| EMC | | DIN EN61326-1:2013, conformity with directive 2014/30/EU |

¹⁾ For more information on the offline configuration please refer to the [CANopen manual](#).

TECHNICAL DATA DIGITAL OUTPUT ABSOLUTE

| Type (Link to the encoder data sheet) | | SSI | CANopen (CAN) | Profibus-DP | EtherCAT | Profinet |
|--|----------------------|-------------|---|---|------------------------------|--------------------------------|
| Link to the manual / file | | - | Manual / EDS | Manual / GSD | Manual / XML | Manual / GSDML |
| Measurement range | [mm] | | | 1000 / 1500 / 2000 / 2500 / 3000 | | |
| Linearity | [%] | | | ±0.05 | | |
| Resolution scalable (via software) | | no | | | yes | |
| Resolution standard | [pulses/mm] [bit] | 12.89 12 | | | 25.79 13 | |
| Resolution max. | [pulses/mm] [bit] | - - | | | 206.3 16 | |
| Sensor element | | | Multiturn-Absolute-Encoder with optical code disk | | | |
| Connection | | | | see order code | | |
| Supply | [VDC] | | 10...30 (reverse polarity protection of the power supply) | | | |
| Current consumption (at 24 VDC, no load) | [mA] | max. 50 | max. 100 | max. 120 | | max. 200 |
| Protection class | | | | IP65, optional IP67 | | |
| Humidity | | | | max. 90 % relative, no condensation | | |
| Operating temperature | [°C] | | | -20...+85 | | |
| Mechanical data | | | | extraction force, maximum velocity and maximum acceleration see Mechanical Data | | |
| Housing | | | | aluminium, anodised, spring case PA6 | | |
| Draw wire | | | | stainless steel V2A Ø 0.5 mm | | |
| Weight | [g] | | | approx. 1600 | | |

ELECTRICAL DATA DIGITAL OUTPUT ABSOLUTE


| Parameters of the SSI interface (8.5863.122X.G222) | | Parameters of the CANopen interface (CAN) (8.5868.122X.2122) | |
|--|---|--|--|
| Code | Gray | Code | Binary |
| Output driver | RS485 Transceiver-Type | Interface | CAN High-Speed acc. to ISO 11898, Basic- and Full-CAN, CAN Specification 2.0 B |
| Permissible load / channel | max. ±20 mA | Protocol | CANopen profile DS406 V3.2 with manufacturer-specific add-ons |
| Signal level | HIGH: typical 3.8 V LOW: with $I_{load} = 20$ mA typical 1.3 V | Baud rate | 10...1000 kbit/s (can be set via DIP switches or software) |
| Resolution | 12 bit | Node address | 1...127 (can be set via rotary switches or software) |
| SSI clock rate | ST-resolution: 50 kHz...2 MHz | Termination | can be set via DIP switches or software |
| Monoflop time | ≤15 µs | SET Button (Option) | Zero or defined value option |
| Data refresh rate | ≤1 µs | LED | LED is ON with the following fault conditions: Sensor error (internal code or LED error) too low voltage, over-temperature |
| Status and Parity bit | on request | | |
| Parameters of the EtherCAT interface (8.5868.12B2.B212) | | Parameters of the Profibus DP interface (8.5868.123X.3112) | |
| Code | Binary | Code | Binary |
| Protocol | EtherNet / EtherCAT | Interface | Profibus DP 2.0 Standard (DIN 19245 Part 3), RS485 Driver galvanically isolated |
| Modes | Freerun, Distributed Clock | Protocol | Profibus Encoder Profile V1.1 Class1 and Class2 with manufacturer-specific add-ons |
| Diagnostic LED red | LED is ON with the following fault conditions: Sensor error (internal code or LED error), low voltage, over-temperature | Baud rate | maximum 12 Mbit/s |
| Run LED green | LED is ON with the following conditions: Preop-, Safeop and Op-State (EtherCAT Status machine) | Device address | 1...127 (set by rotary switches) |
| 2 x Link LEDs yellow | LED is ON with the following conditions (Port IN and Port OUT): Link detected | Termination switchable | set by DIP switches |
| | | SET Button (Option) | Zero or defined value option |
| | | LED | LED is ON with the following fault conditions: Sensor error, Profibus error |
| Parameters of the Profinet interface (8.5868.12C2.C212) | | | |
| Code | Binary | | |
| Protocol | PROFINET 10 | | |
| LED Link1/Link2 | green = active link / yellow = data transfer | | |
| Ezturn Software for Profinet (supplied with the encoder) | <ul style="list-style-type: none"> Monitoring of cyclic data (e.g. position, speed) Monitoring of acyclic data (e.g. IMO, electronic name plate, encoder parameters, warnings and error messages, preset) Setting of preset values Firmware updates via the bus | | |

MECHANICAL DATA


| Measurement range [mm] | Extraction force F_{min} [N] | Extraction force F_{max} [N] | Velocity V_{max} [m/s] ¹⁾ | Acceleration a_{max} [m/s ²] ¹⁾ |
|------------------------|--------------------------------|--------------------------------|--|--|
| 3000 | 8 | 10 | 10 | 140 |
| 4000 | 8 | 11 | 10 | 140 |
| 5000 | 8 | 11.6 | 10 | 140 |

¹⁾ reduced to 80 % with option IP67


TECHNICAL DRAWING ANALOG OUTPUT AND DIGITAL OUTPUT WCAN

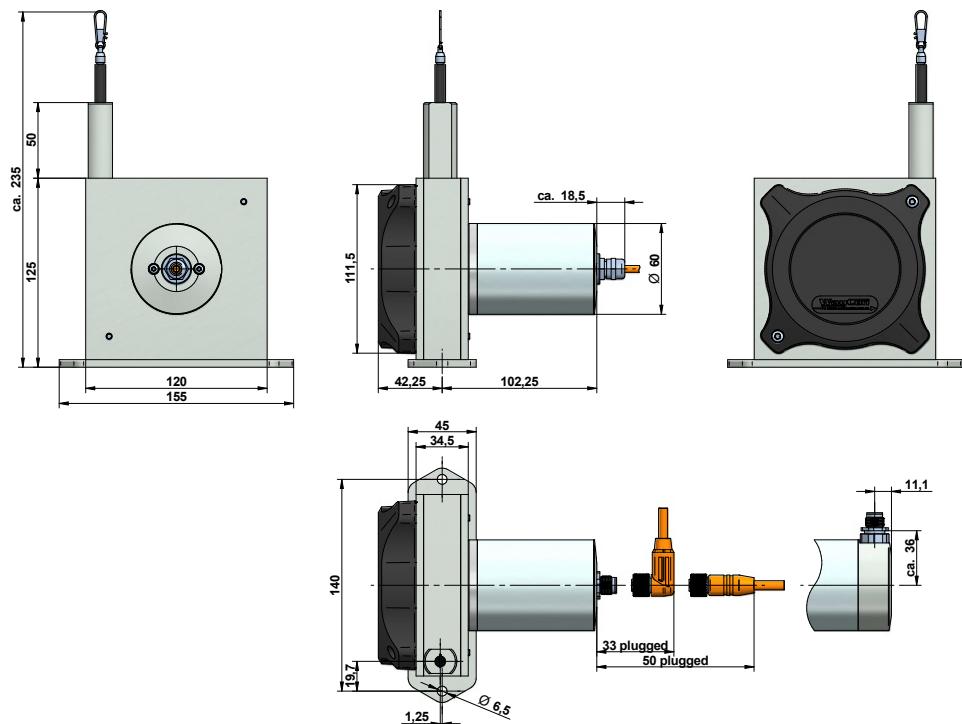


TECHNICAL DRAWING DIGITAL OUTPUT INCREMENTAL

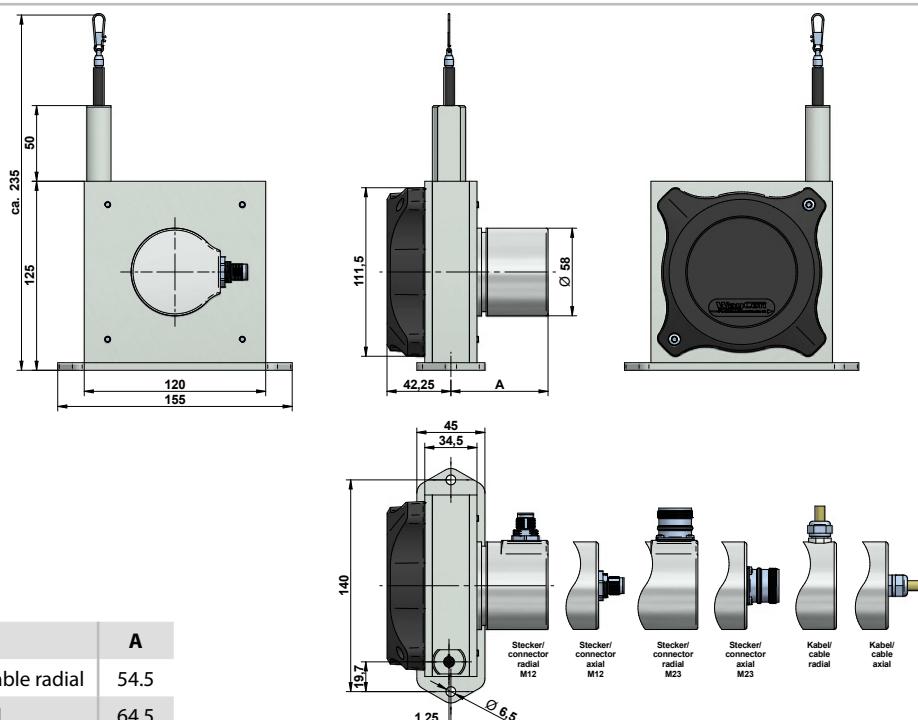

TECHNICAL DRAWING DIGITAL OUTPUT ABSOLUTE

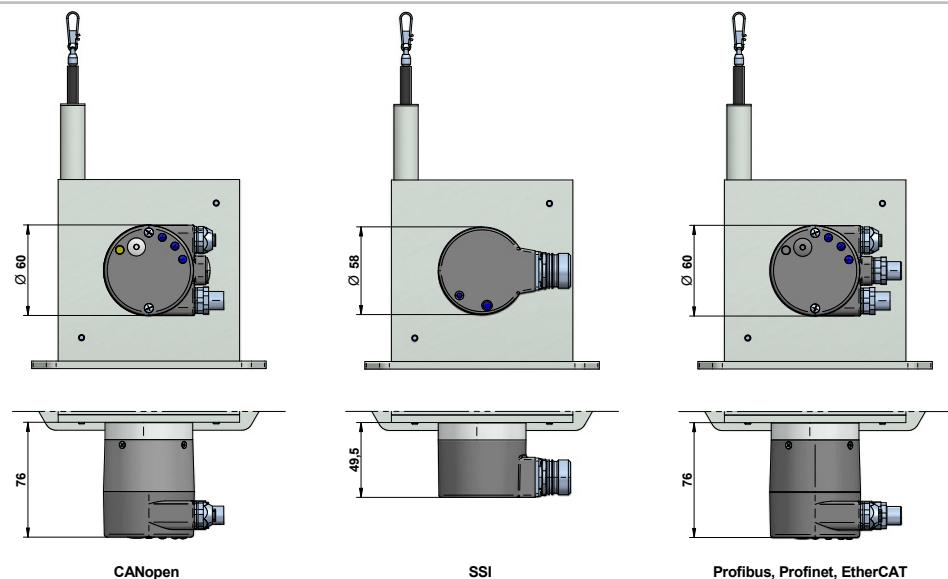


TECHNICAL DRAWING OPTIONS CHANGED ROPE OUTLET AND CABLE OUTPUT

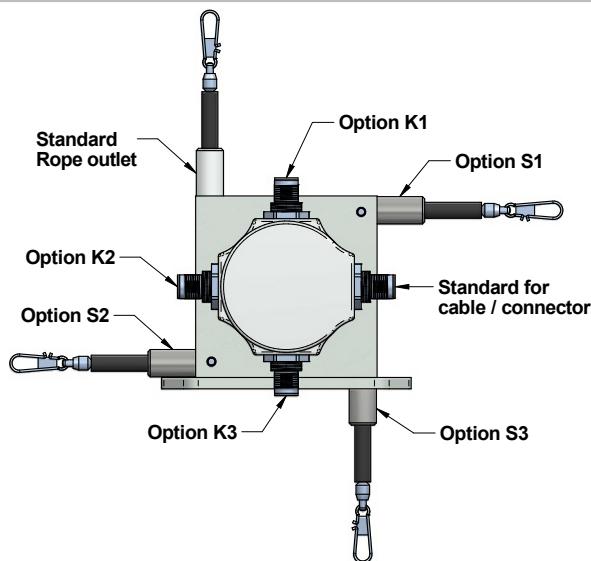


Mounting: standard rope outlet, rope outlet sideways top (S1)

The sensor is usually installed by using the regular mounting plate (see technical drawing above). By disassembling the mounting plate, there are 2 x M4 threads in the sensor housing for alternative installation.







Mounting: rope outlet sideways bottom (S2), rope outlet bottom (S3)

Sensors with option rope outlet S2 and S3 have a modified base plate:

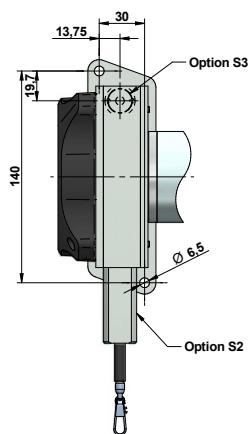

OPTIONS
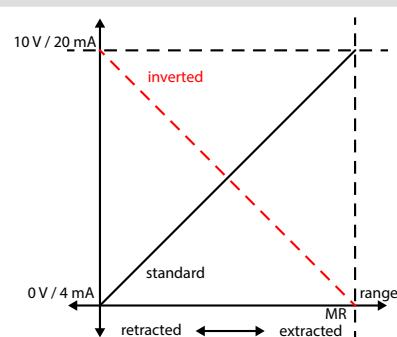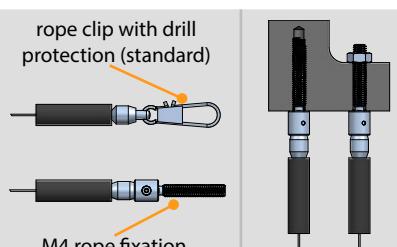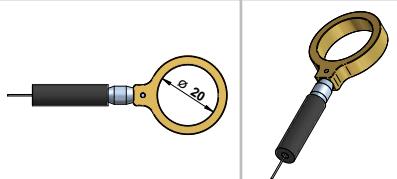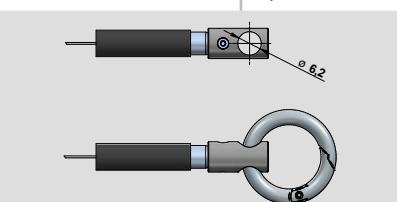
| Option | Order code | Description | |
|--|------------------|---|---|
| Changed cable or connector orientation (NOT with analog output; drawing see page 7) | K1, K2, K3 | Rope outlet points upwards: Standard: sideways, opposite to the rope outlet K1: at the top K2: sideways, same side as the rope outlet K3: at the bottom | |
| Improved linearity | L02, L05 | Improved linearity 0.02 % (L02) or 0.05 % (L05) | |
| Inverted output signal (analog output only) | IN | The analog signal of the sensor is increasing by extracting the rope (standard). Option IN inverts the signal, i.e. the signal of the sensor declines by extracting the rope. |  |
| Changed rope outlet (see drawing on page 7) | S1, S2, S3 | Standard: rope outlet at the top S1: rope outlet sideways at the top S2: rope outlet sideways at the bottom (modified mounting plate, see page 7) S3: rope outlet on the bottom (modified mounting plate, see page 7) | |
| Synthetic wire rope | COR | Synthetic wire rope, made out of abrasion resistant and enhanced Coramid. | |
| Rope fixation by M4 thread | M4 | Optional, pivoted rope fixation with screw thread M4, length 22 mm. Ideal for attachment to through holes or thread holes M4. |  |
| Rope fixation by eyelet | RI | The end of the wire rope is equipped with a eyelet instead of a rope clip. Inside diameter 20 mm |  |
| Rope fixation with cylindrical pin and M6 through bore | ZH, ZR | ZH: cylindrical pin with M6 through bore ZR: cylindrical pin with M6 through bore and carbine ring |  |
| Protection class IP67 | IP67 | Use option IP67, if the sensor will operate in a humid environment. Note that with this option there may occur a light hysteresis in the output signal due to the special sealing. The max. acceleration and displacement speed are reduced to 80 % of the specified value. | |
| Corrosion protection | CP | Includes a V4A wire rope, stainless steel bearings and option M4. The sensors rope drum gets HARTCOAT® coated. This coating is a hard-anodic oxidation that protects the sensor from corrosion by aggressive media (e. g. sea water) with a hard ceramics-like layer. | |
| Increased corrosion protection (analog output only) | ICP | Components of the housing and the rope drum get HARTCOAT® coated. Includes the options CP, IP67 and M4. | |
| Increased temperature range High (potentiometer output only) | H120 | Sensors with potentiometer output and cable output can be operated from -20 to +120 °C when this option is used. | |
| Increased temperature range Low (analog output only) | T40 | Special components and a low temperature grease make a working temperature down to -40 °C (up to +85 °C) possible. | |
| TEDS connector (in combination with analog and cable output only; more information about TEDS) | TD, TDP, TDPS | TD: Assembling TDP: Assembling + programming TDPS: Assembling + programming + 35 measurement points | |


ACCESSORIES

Teach electronics - Squeezer

Draw wire sensors with the analogue output versions 5VT and 10VT are equipped with teachable, internal electronics, called VT-Electronics. The signals provided by the sensor's potentiometer are digitized by the VT-Electronics. This digital information is first processed by the electronics, then transformed back and given out as an analogue output signal 0 to 5 V or 0 to 10 V.

The digitization offers two possibilities of adjustment, by which the sensor can be configured individually using the Squeezer:

- Teaching of the measurement range. After a successful teaching process, the squeezer can be pulled off the sensor and be replaced by a standard cable or connector.
- Setting an individual switching point. The squeezer allows the setting of an individual switching point open collector. The switching signal is emitted through the multi-functional line MFL.

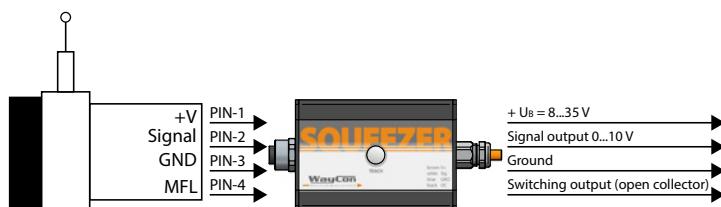

A detailed description of the functions can be found in the [Squeezer manual](#).

Deflection pulley - UR2

The rope must be extracted from the sensor vertically. The maximum variation from the vertical is 3°. A deflection pulley allows a change in the direction of the wire rope. Several pulleys may be used. The rope clip must not be guided over the deflection pulley.



Suitable for standard wire rope diameter 0.5 mm.

Material foot: anodised aluminium

Material rope wheel: POM-C

Mounting: by 2 hexagon socket or countersunk screws M6, vertical or horizontal mounting possible. Ball bearings: with special low temperature grease and RS-sealing.

Temperature: -40...+80 °C

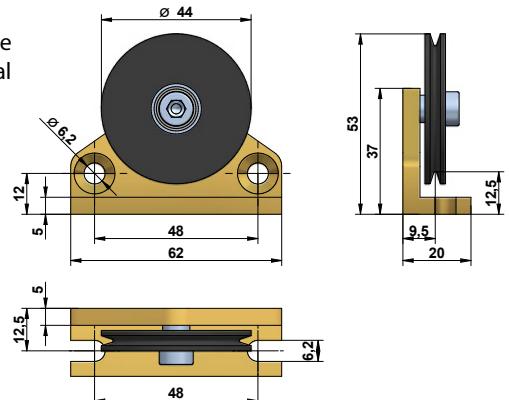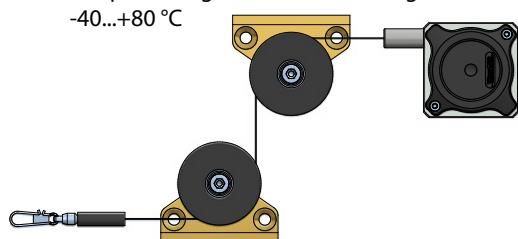

Rope extension - SV


For bridging a greater distance between the measuring target and the sensor a rope extension can be applied. The rope clip must not be guided over the deflection pulley.

Please specify the length needed in your order (XXXX). The minimum length is 150 mm:

SV1-XXXX: rope extension (150...4995 mm)

SV2-XXXX: rope extension (5000...19995 mm)

SV3-XXXX: rope extension (20000...40000 mm)




Magnetic clamp - MGG1

Use the magnetic clamp to quickly attach the rope to metallic objects without any assembly time. A rubber coating provides gentle contact (e. g. on varnished surfaces) and prevents from slipping due to vibration.


The magnet consists of a neodym core for an increased adhesive force of 260 N.

The hook makes it easy to attach the rope clip.

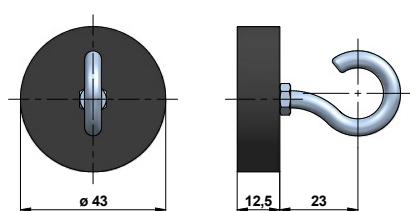

Rope cleaner - RCS

Use the RCS rope cleaner to remove dirt from the measuring rope of the sensor. Please note that the maximum measuring range of the sensor is reduced by 29 mm.

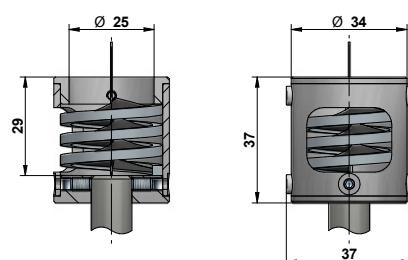

ORDER CODE ANALOG OUTPUT

SX120 - - - -

| | |
|----------------------------------|--|
| Measurement range MR [mm] | |
| 3000 / 4000 / 5000 | |

| Output signal | |
|----------------------|----------------------|
| Potentiometer | 1 kΩ |
| Potentiometer | 5 kΩ |
| Potentiometer | 10 kΩ |
| Voltage | 0.5...4.5 V |
| Voltage | 0...5 V |
| Voltage | -5...+5 V |
| Voltage | 0...10 V |
| Voltage | 0...5 V (teachable) |
| Voltage | 0...10 V (teachable) |
| Current | 4...20 mA |
| | 1R |
| | 5R |
| | 10R |
| | 4,5V |
| | 5V |
| | ±5V |
| | 10V |
| | 5VT |
| | 10VT |
| | 420A |

| Connection | |
|--|-------------|
| Connector output M12, axial, 4 poles | SA12 |
| Connector output M12, radial, 4 poles | SR12 |
| Cable output, axial, 2 m, 4 poles | KA02 |
| Cable output, axial, 5 m, 4 poles | KA05 |
| Cable output, axial, 10 m, 4 poles ¹⁾ | KA10 |

| Version | |
|---------------------|---|
| Standard | - |
| Sensor with options | O |

¹⁾ larger lengths on request

²⁾ for more information about TEDS connectors see [here](#)

Bold text: standard with shorter lead time

| Option | Description (see page 8) |
|---------------|--|
| L05 | Improved linearity ±0.05 % |
| IN | Inverted output signal |
| S1 | Rope outlet sideways top |
| S2 | Rope outlet sideways bottom |
| S3 | Rope outlet bottom |
| COR | Synthetic wire rope (Coramid) |
| M4 | Rope fixation M4 |
| RI | Rope fixation eyelet |
| ZH | Cylindrical pin |
| ZR | Cylindrical pin with carbine ring |
| IP67 | Protection class IP67 |
| CP | Corrosion protection |
| ICP | Increased corrosion protection |
| H120 | Increased temperature range -20...+120 °C |
| T40 | Increased temperature range -40...+85 °C |
| TD | TEDS: assembling ²⁾ |
| TDP | TEDS: assembling + programming ²⁾ |
| TDPS | TEDS: assembling + programming + 35 measurement points ²⁾ |

| Option | Not combinable with |
|---------------|---|
| L05 | T40 |
| COR | H120 |
| M4 | CP, ICP |
| RI | CP, ICP |
| ZH | CP, ICP |
| ZR | CP, ICP |
| IP67 | H120, ICP |
| CP | M4, RI, ZH, ZR, ICP |
| ICP | M4, RI, ZH, ZR, IP67, CP |
| H120 | 4,5V, 5V, ±5V, 10V, 5VT, 10VT, 420A, COR, IP67, CP, ICP, T40, TD, TDP, TDPS |
| T40 | L05, H120 |
| TD | 1R, 5R, 10R, SA12, SR12, H120, TDP, TDPS |
| TDP | 1R, 5R, 10R, SA12, SR12, H120, TD, TDPS |
| TDPS | 1R, 5R, 10R, SA12, SR12, H120, TD, TDP |

ORDER CODE DIGITAL OUTPUT INCREMENTAL

SX120 - - - - -

| | | | | | | | | |
|--|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------|------------------------------------|
| Measurement range MR [mm] 3000 / 4000 / 5000 | <input type="checkbox"/> | Option | Description (see page 8) |
| Resolution [Pulses/mm] 0.3 / 3.1 / 6.3 / 25 | <input type="checkbox"/> | | | | | | | |
| Output signal Line driver RS422 (TTL) Push-Pull (HTL) | <input type="checkbox"/> | L | G | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | Option | Description (see page 8) |
| Connection Connector output M23, radial, 12 pins Connector output M23, axial, 12 pins Connector output M12, radial, 8 pins Connector output M12, axial, 8 pins Cable output, radial, 2 m ¹⁾ Cable output, radial, 5 m ¹⁾ Cable output, radial, 10 m ^{1), 2)} Cable output, axial, 2 m ¹⁾ Cable output, axial, 5 m ¹⁾ Cable output, axial, 10 m ^{1), 2)} | <input type="checkbox"/> | | | SR23 | SA23 | SA12 | Option | Description (see page 8) |
| | | SR12 | SA12 | KR02 | KR05 | KR10 | RI | Cable/connector orientation top |
| | | | | KA02 | KA05 | KA10 | ZH | Cable/connector orientation left |
| | | | | | | | ZR | Cable/connector orientation bottom |
| | | | | | | | IP67 | Improved linearity $\pm 0.02\%$ |
| | | | | | | | CP | Rope outlet sideways top |
| | | | | | | | | Rope outlet sideways bottom |
| | | | | | | | | Rope outlet bottom |
| | | | | | | | | Synthetic wire rope (Coramid) |
| | | | | | | | | Rope fixation M4 thread |
| | | | | | | | | Rope fixation eyelet |
| | | | | | | | | Cylindrical pin |
| | | | | | | | | Cylindrical pin with carbine ring |
| | | | | | | | | Protection class IP67 |
| | | | | | | | | Corrosion protection |
| Version Standard Sensor with options | <input type="checkbox"/> | - | O | | | | | |

¹⁾ Line driver: 10 poles / Push-Pull: 8 poles

²⁾ larger lengths on request

Bold text: standard with shorter lead time

ORDER CODE DIGITAL OUTPUT ABSOLUTE CANOPEN (WCAN)

SX120 - - - -

| | | | | | | | | |
|---|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|---------------|---------------------------------|
| Measurement range MR [mm] 3000 / 4000 / 5000 | <input type="checkbox"/> | Option | Description (see page 8) |
| Output signal CANopen CANopen ¹⁾ | <input type="checkbox"/> | | | | | | | |
| Connection ²⁾ Connector output M12, axial, 4 poles Cable output, axial, 2 m, 4 poles Cable output, axial, 5 m, 4 poles Cable output, axial, 10 m, 4 poles ³⁾ | <input type="checkbox"/> | SA12 | KA02 | KA05 | KA10 | <input type="checkbox"/> | Option | Description (see page 8) |
| | | | | | | | | |
| Version Standard Sensor with options | <input type="checkbox"/> | - | O | | | | | |

¹⁾ offline configurable via Squeezee

²⁾ WCAN: 5 poles / WCANP: 8 poles

³⁾ larger lengths on request

| | |
|-------------|--|
| S1 | Rope outlet sideways top |
| S2 | Rope outlet sideways bottom |
| S3 | Rope outlet bottom |
| COR | Synthetic wire rope (Coramid) |
| M4 | Rope fixation M4 |
| RI | Rope fixation eyelet |
| ZH | Cylindrical pin |
| ZR | Cylindrical pin with carbine ring |
| IP67 | Protection class IP67 |
| CP | Corrosion protection |
| ICP | Increased corrosion protection |
| T40 | Increased temperature range -40...+85 °C |

| | |
|---------------|----------------------------|
| Option | Not combinable with |
| M4 | CP, ICP |
| RI | CP, ICP |
| ZH | CP, ICP |
| ZR | CP, ICP |
| IP67 | ICP |
| CP | M4, RI, ZH, ZR, ICP |
| ICP | M4, RI, ZH, ZR, IP67, CP |

ORDER CODE DIGITAL OUTPUT ABSOLUTE

SX120 - □ - □ - □ - □

| | | | | | | | |
|---|--|--|--|--|--|--|--|
| Measurement range MR [mm] 3000 / 4000 / 5000 | | | | | | | |
| Output signal SSI CANopen Profibus DP EtherCAT Profinet | SSI CAN PRO CAT NET | | | | | | |
| Connection Connector M12, radial, 8 pins (SSI) Connector M23, radial, 12 pins (SSI) Cable output, radial, 1 m, PVC (SSI) Cable output, radial, 5 m, PVC (SSI) Cable gland, radial (CAN, PRO) ¹⁾ Connector 2 x M12, radial, 5 pin (CAN) ¹⁾ Connector 3 x M12, radial, 5 pin (PRO) ¹⁾ Connector 3 x M12, radial, 4 pin (CAT, NET) ¹⁾ | SR12 SR23 KR01 KR05 KVBH SR12 SR12 SR12 | | | | | | |
| Version Standard Sensor with options | - O | | | | | | |

| Option | Description (see page 8) |
|---------------|------------------------------------|
| K1 | Cable/connector orientation top |
| K2 | Cable/connector orientation left |
| K3 | Cable/connector orientation bottom |
| S1 | Rope outlet sideways top |
| S2 | Rope outlet sideways bottom |
| S3 | Rope outlet bottom |
| COR | Synthetic wire rope (Coramid) |
| M4 | Rope fixation M4 thread |
| RI | Rope fixation eyelet |
| ZH | Cylindrical pin |
| ZR | Cylindrical pin with carbine ring |
| IP67 | Protection class IP67 |
| CP | Corrosion protection |

| Option | Not combinable with |
|---------------|----------------------------|
| M4 | CP |
| RI | CP |
| ZH | CP |
| ZR | CP |
| CP | M4, RI, ZH, ZR |

¹⁾ removable bus terminal cover

GENERAL ACCESSORIES

| | |
|-------------|--|
| SQUEEZER2M | accessory for VT or WCANP output, 2 m cable |
| SQUEEZER5M | accessory for VT or WCANP output, 5 m cable |
| SQUEEZER10M | accessory for VT or WCANP output, 10 m cable |
| UR2 | deflection pulley (for rope diameter 0.5 mm) |
| MGG1 | magnetic clamp |

¹⁾ please note that the maximum measuring range is reduced by 29 mm when using the rope cleaner

| | |
|-------------------------|--|
| SV1-XXXX | rope extension (150 mm up to 4995 mm) |
| SV2-XXXX | rope extension (5000 mm up to 19995 mm) |
| SV3-XXXX | rope extension (20000 mm up to 40000 mm) |
| RCS-SX120 ¹⁾ | rope cleaner |

ACCESSORIES ANALOG OUTPUT

Cable with connector (female) M12, 4 poles, shielded, IP67

| | |
|---------------|--------------------------|
| K4P2M-S-M12 | 2 m, straight connector |
| K4P5M-S-M12 | 5 m, straight connector |
| K4P10M-S-M12 | 10 m, straight connector |
| K4P2M-SW-M12 | 2 m, angular connector |
| K4P5M-SW-M12 | 5 m, angular connector |
| K4P10M-SW-M12 | 10 m, angular connector |

Mating connector (female) M12, 4 poles, for self assembly

| | |
|------------|--------------------|
| D4-G-M12-S | straight connector |
| D4-W-M12-S | angular connector |

Digital displays for sensors with analog output, 2 channel

| | |
|-----------|-------------------------------------|
| WAY-AX-S | touch screen, supply: 18...30 VDC |
| WAY-AX-AC | touch screen, supply: 115...230 VAC |

For more information and options please refer to the [WAY-AX data sheet](#).

Connection cable sensor to Squeezer (female to male)

| | |
|----------------|--------------------------|
| K4P1,5M-SB-M12 | 1.5 m, shielded, 4 poles |
|----------------|--------------------------|

ACCESSORIES DIGITAL OUTPUT INCREMENTAL

Cable with connector (female) M12, 8 poles, shielded, IP67

| | |
|---------------|--------------------------|
| K8P2M-S-M12 | 2 m, straight connector |
| K8P5M-S-M12 | 5 m, straight connector |
| K8P10M-S-M12 | 10 m, straight connector |
| K8P2M-SW-M12 | 2 m, angular connector |
| K8P5M-SW-M12 | 5 m, angular connector |
| K8P10M-SW-M12 | 10 m, angular connector |

Cable with connector (female) M23, 12 poles, shielded, IP67

| | |
|---------------|--------------------------|
| K12P2M-S-M23 | 2 m, straight connector |
| K12P5M-S-M23 | 5 m, straight connector |
| K12P10M-S-M23 | 10 m, straight connector |

Mating connector (female) M12, 8 poles, for self assembly

| | |
|------------|--------------------|
| D8-G-M12-S | straight connector |
| D8-W-M12-S | angular connector |

Mating connector (female) M23, 12 poles, for self assembly

| | |
|----------|-----------------------------------|
| CON012-S | straight connector, metal housing |
|----------|-----------------------------------|

Digital displays for sensors with HTL output, 2 channel

| | |
|-----------|-------------------------------------|
| WAY-DX-S | touch screen, supply: 18...30 VDC |
| WAY-DX-AC | touch screen, supply: 115...230 VAC |

For more information and options please refer to the [WAY-DX data sheet](#).

Digital displays for sensors with HTL or TTL output, 2 channel

| | |
|------------|-------------------------------------|
| WAY-DXM-S | touch screen, supply: 18...30 VDC |
| WAY-DXM-AC | touch screen, supply: 115...230 VAC |

For more information and options please refer to the [WAY-DXM data sheet](#).

ACCESSORIES DIGITAL OUTPUT ABSOLUTE CANOPEN (WCAN)

Cable with connector (female) M12, 5 poles, shielded, IP67

| | |
|--------------|-------------------------|
| K5P2M-S-M12 | 2 m, straight connector |
| K5P2M-SW-M12 | 2 m, angular connector |

Cable with connector (female) M12, 8 poles, shielded, IP67

| | |
|--------------|-------------------------|
| K8P2M-S-M12 | 2 m, straight connector |
| K8P2M-SW-M12 | 2 m, angular connector |

Connection cable sensor to Squeezer (female to male)

| | |
|----------------|-------------------------------------|
| K48P03M-SB-M12 | 0.3 m, shielded, 8 poles to 4 poles |
|----------------|-------------------------------------|

Adapter cable WCANP to CAN-Bus (female to male)

| | |
|----------------|-------------------------------------|
| K58P03M-SB-M12 | 0.3 m, shielded, 8 poles to 5 poles |
|----------------|-------------------------------------|

ACCESSORIES DIGITAL OUTPUT ABSOLUTE SSI

Cable with connector (female) M12, 8 poles, shielded, IP67

| | |
|--------------|--------------------------|
| K8P2M-S-M12 | 2 m, straight connector |
| K8P5M-S-M12 | 5 m, straight connector |
| K8P10M-S-M12 | 10 m, straight connector |
| K8P15M-S-M12 | 15 m, straight connector |

Cable with connector (female) M23, 12 poles, shielded, IP67

| | |
|---------------|--------------------------|
| K12P2M-S-M23 | 2 m, straight connector |
| K12P5M-S-M23 | 5 m, straight connector |
| K12P10M-S-M23 | 10 m, straight connector |
| K12P15M-S-M23 | 15 m, straight connector |

Mating connector (female) M12, 8 poles, for self assembly

| | |
|------------|--------------------|
| D8-G-M12-S | straight connector |
| D8-W-M12-S | angular connector |

Mating connector (female) M23, 12 poles, for self assembly

| | |
|----------|-----------------------------------|
| CON012-S | straight connector, metal housing |
|----------|-----------------------------------|

Digital displays for sensors with SSI output, 2 channel

| | |
|-----------|-------------------------------------|
| WAY-SX-S | touch screen, supply: 18...30 VDC |
| WAY-SX-AC | touch screen, supply: 115...230 VAC |

For more information and options please refer to the [WAY-SX data sheet](#).

ACCESSORIES DIGITAL OUTPUT ABSOLUTE CANOPEN (CAN)

Cable with connector M12, 5 poles, shielded, IP67

| | |
|------------------|---|
| K5P2M-B-M12-CAN | 2 m, female connector to open ends |
| K5P2M-SB-M12-CAN | 2 m, female connector to male connector |
| K5P2M-S-M12-CAN | 2 m, male connector to open ends |

ACCESSORIES DIGITAL OUTPUT ABSOLUTE PROFIBUS

Cable with connector M12, 5 poles, shielded, IP67

| | |
|-------------------|---|
| K5P2M-B-M12-PROF | 2 m, female connector to open ends |
| K5P2M-SB-M12-PROF | 2 m, female connector to male connector |
| K5P2M-S-M12-PROF | 2 m, male connector to open ends |

Other

| | |
|-------------|----------------------|
| M12-PROF-AW | termination resistor |
|-------------|----------------------|

ACCESSORIES DIGITAL OUTPUT ABSOLUTE ETHERCAT AND PROFINET

Cable with connector (male) M12, 4 poles, shielded, IP67

| | |
|------------------|--------------------------|
| K4P2M-S-M12-CAT | 2 m, straight connector |
| K4P5M-S-M12-CAT | 5 m, straight connector |
| K4P10M-S-M12-CAT | 10 m, straight connector |

Cable with connector M12, 4 poles, shielded, IP67

| | |
|-------------------|--|
| K4P2M-SS-M12-CAT | 2 m, male connector to male connector |
| K4P5M-SS-M12-CAT | 5 m, male connector to male connector |
| K4P10M-SS-M12-CAT | 10 m, male connector to male connector |

Please note, that an additional cable is required for the power supply. Appropriate cables can be chosen from the list of the [„Accessories Analog Output“](#).



Nyckelvägen 7
142 50 SKOGÅS, Sweden

Tel: +46 (0) 771 02 20
info@hemomatik.se

www.hemomatik.se

Subject to change without prior notice.

WayCon Positionsmesstechnik GmbH

Email: info@waycon.de
Internet: www.waycon.biz



Headquarters Munich

Mehlbeerenstr. 4
82024 Taufkirchen
Tel. +49 (0)89 67 97 13-0
Fax +49 (0)89 67 97 13-250

Office Cologne

Auf der Pehle 1
50321 Brühl
Tel. +49 (0)2232 56 79 44
Fax +49 (0)2232 56 79 45