




Ordertel 08-771 00 04 Växel 08-771 02 20
Orderfax 08-771 62 00 Teknisk 08-771 35 80


Email info@hemomatik.se
Internet www.hemomatik.se

DIMENSION

KT-07N, KT-07P / KT-07N-QD, KT-07P-QD




KT-07R, KT-072R, KT-07D /
KT-07R-QD, KT-072R-QD, KT-07D-QD

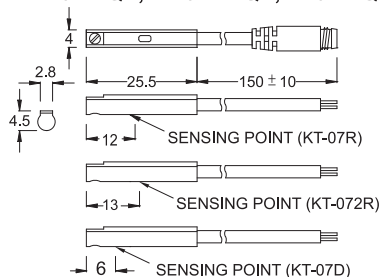


Unit:mm

QD PINOUT


*3 wire QD wiring








*2 wire QD wiring



*2 wire EQD wiring





SPECIFICATION

TYPE	KT-07R	KT-072R	KT-07D	KT-07N	KT-07P
CONNECT DIAGRAM					
CHARACTERISTICS					
WIRING METHOD	2-Wire Type			3-Wire Type	
SWITCHING LOGIC	SPST, Normally Open		Solid State Output, Normally Open		
SENSOR TYPE	Reed Switch		--	NPN Current Sinking	PNP Current Sourcing
OPERATING VOLTAGE	5~120V DC/AC	5~240V DC/AC	10~28V DC	5~30V DC	
SWITCHING CURRENT	100 mA max.		4~40 mA max.	200 mA. max.	
CONTACT RATING (NOTE 1)	10 W max.		1.5 W max.	6W max.	
CURRENT CONSUMPTION	--			8 mA @ 24V DC max.	
VOLTAGE DROP	3.5 V max.			1 V @ 200mA max.	
LEAKAGE CURRENT	--		1 mA max.	0.01 mA max.	
INDICATOR	Red LED	Green LED	Red LED		Green LED
CABLE	ø2.8, 2C, PUR			ø2.8, 3C, PUR	
OPERATING FREQUENCY	200 Hz		1000 Hz		
MAGNET REQUIREMENT (NOTE 2)	70 Gauss		40 Gauss	30 Gauss	
TEMPERATURE RANGE	-10~70℃				
SHOCK (NOTE 3)	30 G		50 G		
VIBRATION (NOTE 4)	9 G				
ENCLOSURE CLASSIFICATION	IEC 529 IP 67				
PROTECTION CIRCUIT (NOTE 5)	1		4	2,3,4	

NOTE:

1. WARNING: Never exceed rating (Watt=Voltage x Amperage). Permanent damage to sensor will occur.
2. Measuring standard target: ø15.5Xø8X5t (Anisotropy rubber magnet)
3. Sin wave / X, Y, Z 3 directions / 3 times each direction / 11 ms each time.
4. Double amplitude 1.5 mm / 10Hz~55Hz~10Hz (Sweep 1 min) / X, Y, Z 3 directions / 1 hour each time.
5. 1=None / 2=Short-circuit / 3=Power Source Reverse polarity / 4=Surge Suppression

GROOVE DIMENSION



Unit:mm