

CD12M/AC-050A5

connectors




Micro Detectors

Italian Sensors Technology



Indicative image

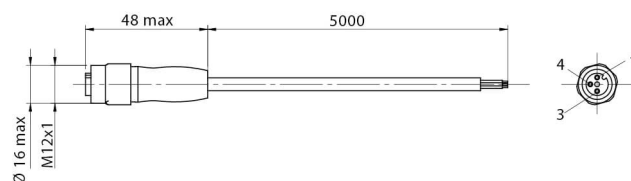

HM 2102

Electrical data

Nominal current	4 A
Led	No
Wires	2
Rated impulse voltage	2 kV
Nominal voltage	Max. 250 V ac/dc

Mechanical data

Tightening torque	0,6 Nm
Operating temperature	-10°C ...+80°C (flexible installation)-25°C...+80°C (fixed installation)
Lenght (m)	5
Head type	Axial
Plug	M12 (AC)
Outer diameter	Ø 4,6 mm ± 5%
Jacket material	TPU
Wire isolation	PVC
Conductors section	0,50 mm ²
Model	Femmina

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

YE-GN/1

BN/2

BU/3

M.D.Micro Detectors S.p.A.