

Wide range of accessories
for our standard thermoelement probes
to match a great variety
of temperature measurement
and installation requirements
in several processes

MOUNTING ACCESSORIES AND ADAPTERS

THREADED MOUNTING FITTING WITH BAYONET LOCK CAP. THE CAP CAN BE SET AT DIFFERENT HEIGHTS TO VARY THE SPRING STRENGTH AS WELL AS THE CRIMP ON STOP RING

bayonet cap, spring and stop ring for probes with: 2 mm O.D.

male thread: M8X1, M12X1,75 or 1/4" straight gas thread
(to UNI ISO 228)

body material: nickel plated brass



CODE TO ORDER FROM STOCK:

BODY WITH PROCESS CONNECTION


M8X1	AMEC005
1/4" CIL	AMEC003
M12X1,75	AMEC004

BAYONET CAP

Only for Ø2mm probes	AMEC041
----------------------	---------

SPRING AND STOP RING


Only for Ø2mm probes	MOLLA002
----------------------	----------

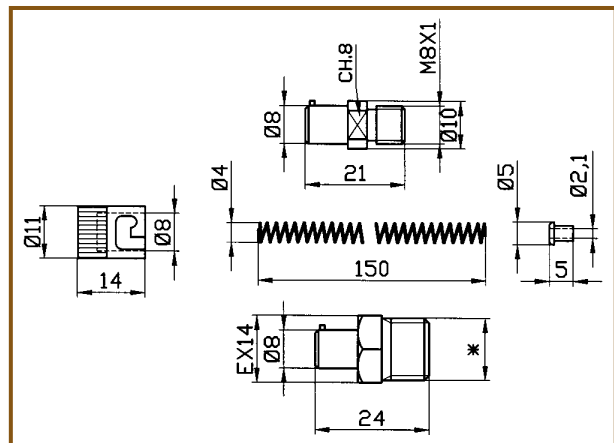

**AISI 316 s.s. WELDING PAD DIM. 25X25 mm
FOR THERMOCOUPLE PROBES WITH 3 OR 4,5 mm O.D.
THE PAD HAS TO BE WELDED ON A PLANE SURFACE AND ALLOWS
A GOOD SKIN-POINT TEMPERATURE MEASUREMENT**

CODE TO ORDER FROM STOCK:

for Ø 3 mm probes, 5 mm thick	SKIN005
for Ø 4,5 mm probes, 6 mm thick	SKIN006

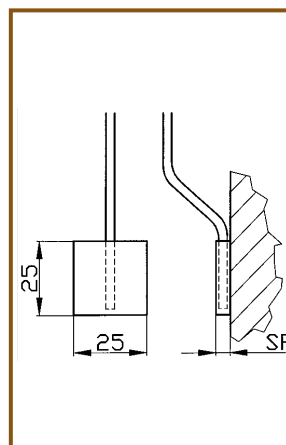

**CASE FOR SURFACE TEMPERATURE MEASUREMENTS ON PIPES
WITH 3mm O.D. RTD probes using a pipe clamping strip (not
included)**


for: RTD probes with 3 mm sheat diameter (TRSV8, TRM, TRE)

material of construction: brass



CODE TO ORDER FROM STOCK:

SKIN002

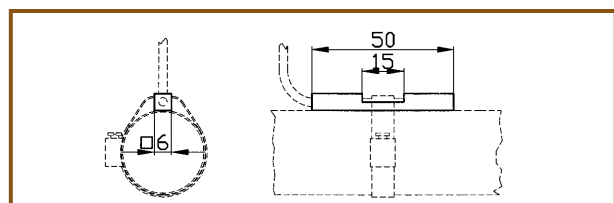

Order tel 08-771 00 04 Växel 08-771 02 30
Order fax 08-771 62 00 Teknisk 08-771 35 80
Lärna, S-142 50 SKOGÅS (Stockholm)

HEMOMATIK
www.hemomatik.se