


HMFA4S-AFF-3

TRYCKVAKT 3/4" BSP NO/NC 1-12
BAR Set AT 3 BAR BRASS + NITRIL

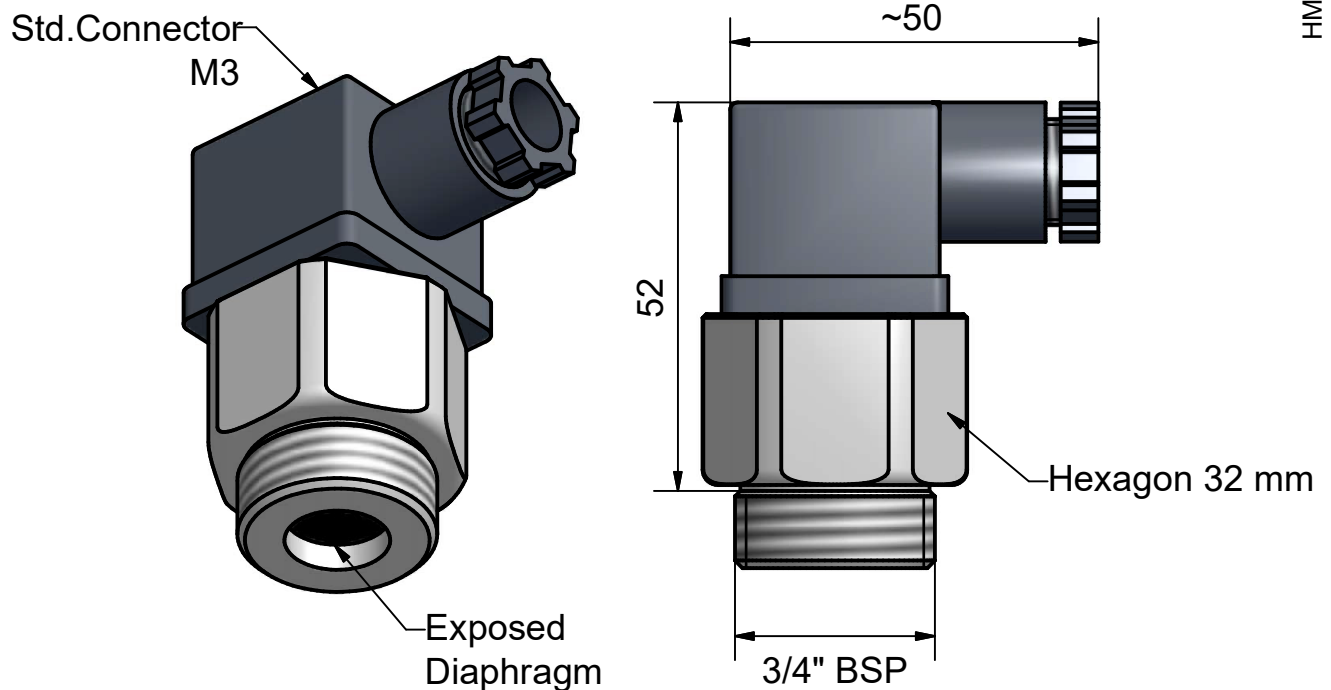

Technical data

Body	Brass
Diaphragm	NBR
Regulation range	1-12 bar, set at 3 bar
Max pressure	25 bar
Working temperature	-25°C to +85°C
Switching frequency	90 cycles/min
Intervention point	set with internal screw, preset 3 bar
switching accuracy	±10 of F.S.
Fix hysteresis value	about 10% of F.S.

Electrical data

Max load contacts	0,5A@250VAC or 0,15A@110VDC
Type	NO/NC change over
Electrical connection	DIN43650
Protection degree	IP65

HM 2005