

FAI8/BP-0EAN

cylindrical photosensors




Micro Detectors

Italian Sensors Technology



Indicative image

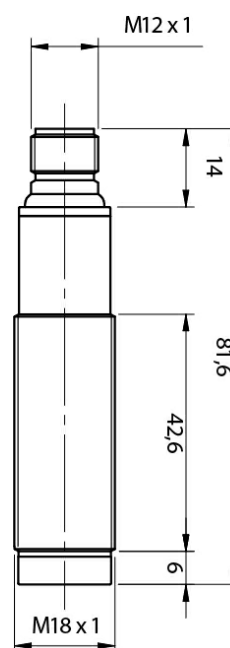

Detection properties

Nominal sensing distance 1000mm white target 90% Kodak 400x400mm

Thermal drift of Sr ≤10% Sr

Repeat Accuracy 5%

Sensitivity adjustment Trimmer

Application

Function Principle Diffuse reflection

Optic position Axial

Outputs

Output type PNP

Output Function NO+NC

Switching frequency 250Hz

Electrical data

Operating Voltage	10-30Vdc
No-Load supply current	≤30mA
Load current	≤100mA
Leakage current	≤10μA
Output voltage drop	2V max. IL =100 mA
Max ripple content	10%
LED indicators	Yellow (Lon) or output status Lo/Do
Time delay before availability	≤200ms
Short-circuit protection	Short circuit (autoreset), Overvoltage
Reverse Polarity Protection	Polarity inversal, Impulsive voltage
Emission	Infrared (880 nm)
Interference to external light	3000lux (incandescent lamp), 10000lux (sunlight)

Mechanical data

Dimensions	M18 x 1 /L =81,6mm
Weight	30g
Housing Material	PBT
Connections	M12 4pin Plug
Active Head Material	PC
Tightening torque	1Nm
Operating temperature	- 25°C...+ 70° C (Without freeze)


Test/Approvals

Approvals	CE, cULus, ATEX : II 3G Ex nA IIC T6 Gc II 3D Ex tc IIIB T85°C Dc
EMC compatibility	EN 60947-5-2
Shocks and vibrations	Vibration IEC 60068-2-6 / Shock IEC 60068-2-27
Degree of protection	IP67

Accessories

Supplied Accessories	nuts M18 x 1, screwdriver
----------------------	---------------------------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS

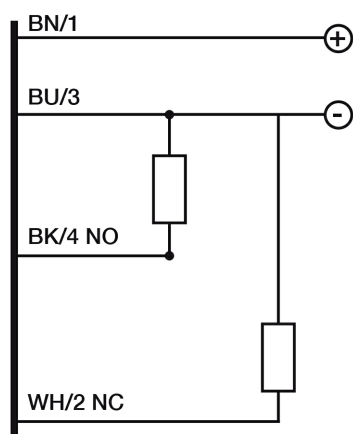

CONNECTOR



M.D.Micro Detectors S.p.A.

Strada S.Caterina, 235
41122 Modena (MO)
Tel. 059 420411
Fax 059 253973
E-mail info@microdetectors.com

date of printing

10/10/2019 10:01:18