

HEMOMATIK SWEDEN	Scale 1:1	INDUKTIV M8 PNP NO H #	Art.no. AE1/AP-3A-300H4-MD
		Sn=2mm, PIGTAIL M12	Drawing no. AE1AP-3A-300H4-MD
Approved			Rev. 0
		Date 160503	Sign. MEM
		Rev.date X	Art.group BDI#



HEMOMATIK

SENSORS

since 1973


www.hemomatik.se

www.hemomatik.se

AE1/AP-3A-300H4-MD

INDUKTIV M8 PNP NO H


Sn=2mm, PIGTAIL M12

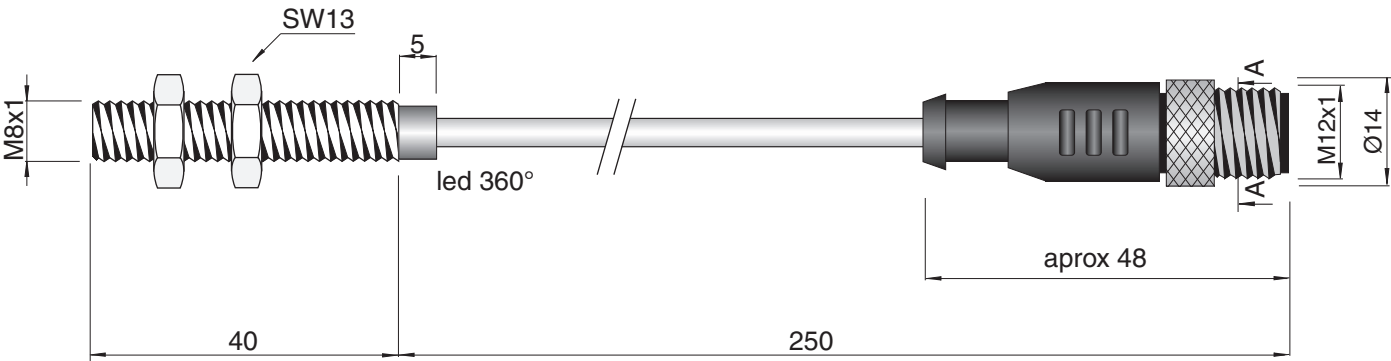

Rated distance	2 mm
Supply voltage U_B	10 - 30 VDC
Ripple max.	10 %
ON-state current max.	200 mA
Max. switching rate	5 kHz
Operating temperature range	-25 - +70°C
No-load supply current	10 mA
Protection degree	IP67
Mounting	Embeddable
Standard target	8x8mm FE360

Protection against short circuit, reversal of polarity and inductive peaks.

Built-in

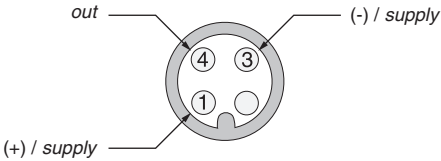

Specification				
Art. no	Description	Pcs		
AE1/AP-3A-300H4-MD	Inductive sensor M8 PNP	1		