


Capacitive Sensors
Series 70 - NPN
Series 80 - PNP


Housing M 32 x 1.5

- Housing material: Stainless steel VA
- Sensing distance 1...40 mm adjustable
- With flange connector M 12 x 1



Certificate:

Technical data

Non-flush mountable







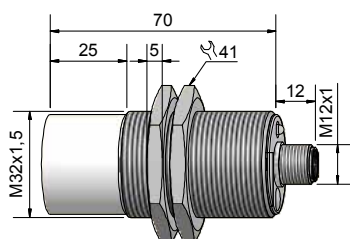
Operating distance S_n	25 mm
Operating distance min. / max. adjustable	1...40 mm
Electrical version	4-pin DC
Output function	Antivalent
Type NPN	KAS-70-34-A-M32-PTFE/V2A-Y5
Art.-No.	718 555
Connection diagram No.	3
Type PNP	KAS-80-34-A-M32-PTFE/V2A-Y5
Art.-No.	818 555
Connection diagram No.	6
Operating voltage (U_b)	10...35 V DC
Output current max. (I_o)	2 x 250 mA
Voltage drop max. (U_d)	≤ 2.0 V
Permitted residual ripple max.	10 %
No-load current (I_o)	Typ. 15 mA
Frequency of operating cycles max.	50 Hz
Permitted ambient temperature	-25...+70 °C
LED-display	Green / yellow
Protective circuit	Built-in
Degree of protection IEC 60529	IP 67*
Norm	EN 60947-5-2
Connection	Flange connector M 12 x 1
Housing material	VA No. 1.4305
Active surface	PTFE (FDA 21 CFR 177.1550)
Lid	PA / PPO
Media optimized	Yes

Accessories (is delivered with the sensor)

2 pieces nuts M 32

For matching connectors please see our selection of accessories.

* With sealed potentiometer screw


Made in Germany

All specifications are subject to change without notice. (06/2014)