

HEMOMATIK
Sweden

Liquid level switch

Art.nr.
HS28-A-PUR-5M

Drawing nr.
HS28-A-PUR-5M

Rev.
0



Approved
P.L.231027

Scale
1:1

Date
231027

Sign.
MEM

Rev. date

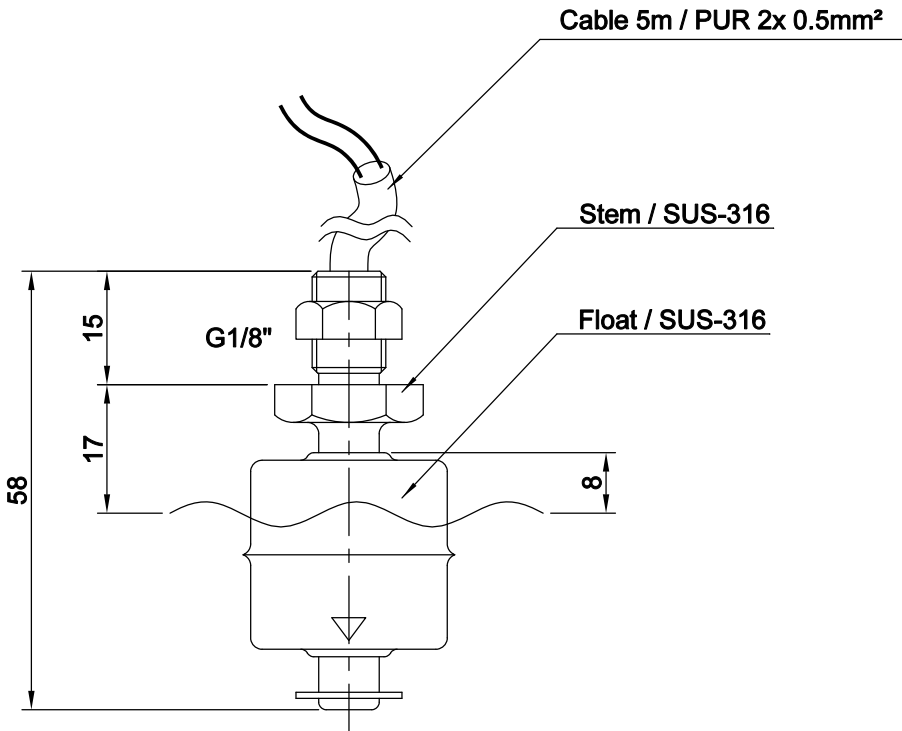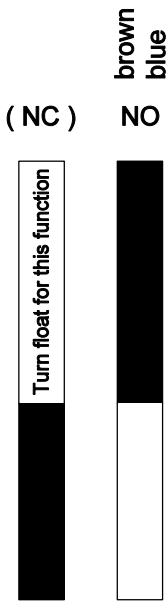

MATERIALS


Stem : SUS-316
Float : SUS-316

Temp. max : +80°C
IP66

ELECTRICAL DATA

Contact rating *	70W/VA
max voltage	3-48 V
max current	1,5 A

* = resistive load

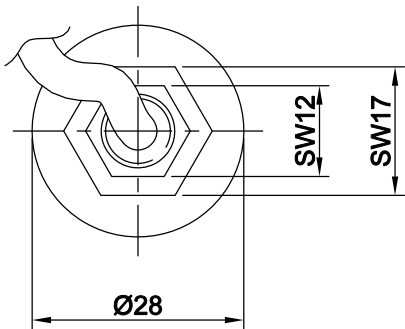

■ = Switch closed

□ = Switch open

Note. Above values are for resistive loads. Mechanical life is 30 millions.

Use series resistor for lamp load, or other suitable protection for inductive loads if the rating is higher than 1/10 of the values above.