


- ✓ Special mounting bracket for radial (90 degrees) emission
- ✓ Suitable for LTR-M18PA and LRR-M18PA

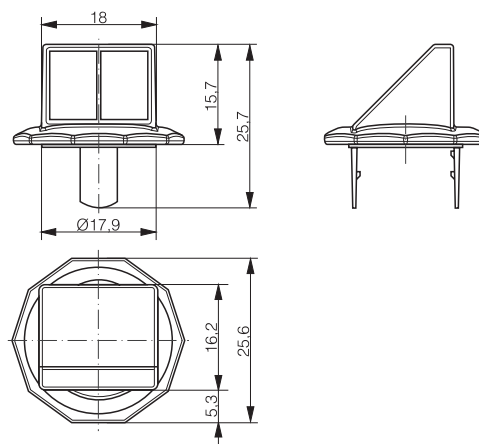

OPTICAL DATA

Sensing range typ. max.	See tables
Operating range	See tables

MECHANICAL DATA

Material	ABS/PMMA
Weight	2 g

SENSING RANGE WITH LTR-M18PA

Target	Operating range	Sensing range max.
90%	0...800 mm	0...1'000 mm
18%	3...360 mm	3...440 mm
6%	8...200 mm	8...280 mm

SENSING RANGE WITH LRR-M18PA

Target	Operating range	Sensing range typ.max.
LXR-0000-084	20...4'500 mm	15...5'500 mm
LXR-0000-046	70...3'300 mm ¹	60...3'700 mm ¹
LXR-0001-088	25...6'000 mm ¹	20...7'300 mm ¹
LXR-0001-064	35...4'300 mm ¹	30...5'300 mm ¹

¹ Indicative value

AVAILABLE TYPE

Part number	Part reference
622 000 096	LTW-M18PA-000

Note: additional suffix can appear to indicate a revision version or a special version.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved.

CONTRINEX AG Industrial Electronics

route du Pâqui 5 - P.O. Box - CH 1720 Corminboeuf - Switzerland - **Tel:** +41 26 460 46 46 -
Fax: +41 26 460 46 40 - **Internet:** www.contrinex.com - **E-mail:** info@contrinex.com

LTW-M18PA-000_Rev 0_15.05.17_PYD