



CD12M/LB-050C5

connectors

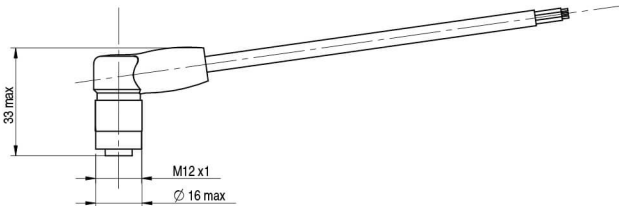

Indicative image

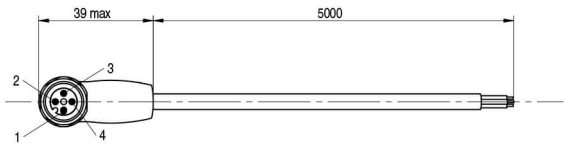

HM 2103

Electrical data

Nominal current	4 A
Led	3
Wires	4
Nominal voltage	250 V


Mechanical data

Operating temperature	-40°C ... +80°C (fixed installation) '-25°C ... +80°C (flexible installation)
Lenght (m)	5
Head type	90°
Plug	M12
Outer diameter	Ø 4,7mm ±0.20mm
Jacket material	TPU
Wire isolation	PP
Bending radius	> 5 x D (fixed installation) > 10 x D (flexible installation)
Model	Femmina

Test/Approvals

Degree of protection	IP 67 / NEMA 6P
----------------------	-----------------

ELECTRICAL DIAGRAMS OF THE CONNECTIONS



Nyckelvägen 7
142 50 SKOGÅS, Sweden

Tel: +46 (0) 771 02 20
info@hemomatik.se

www.hemomatik.se