


TKON-500




For electrovalves, style A, 3p+G
Female, field attachable

EN175301-803 style A square connector,
(former DIN 43650-A), ISO 4400.

built-in gasket, central screw total insulation

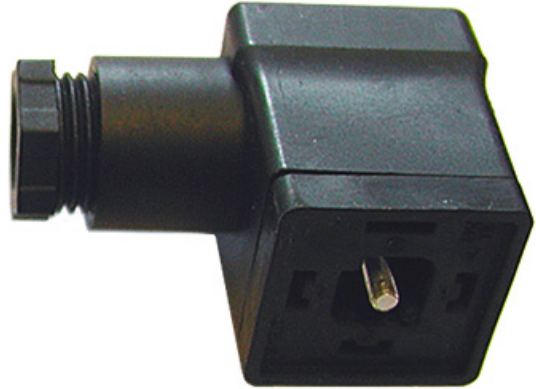

HM 2104

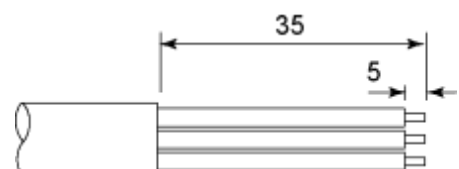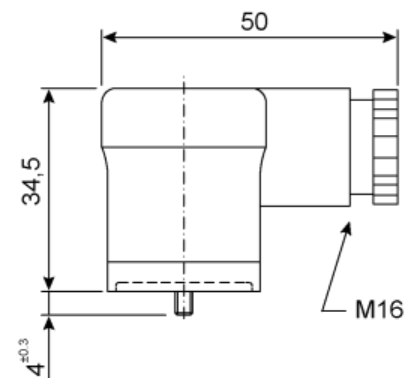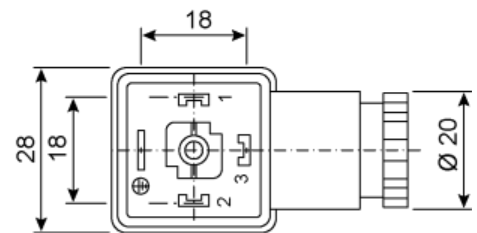

Technical data	
Housing material:	PA66 30%GF
Contact material:	nickel plated CuZn
Max wires section:	1,50 mm ²
Protection degree:	IP67 (IEC 60529)
Working temperature:	-40...125° C
Oil resistance:	good
M3 central screw material:	zinc plated iron
Voltage:	1-250 V AC/DC
Max current	10A @40°C

CONNECTORS FOR ELECTROVALVES WITH SCREW TERMINALS

EN175301-803 (ex DIN43650)

Guaranteed water
proof grade IP67

c **AL** **us** on request

