

HEMOMATIK SWEDEN	Scale 1:1	INDUKTIV M8 PNP NO F	Art.no. HM-AES/AP-3A8FVF80
		Sn=2mm, PIGTAIL M8	Drawing no. HM-AES/AP-3A8FVF80
Approved			Rev. 0
		Date 170908	Sign. MEM
		Rev.date X	Art.group BDI#



HEMOMATIK

SENSORS

since 1973


www.hemomatik.se

www.hemomatik.se

HM-AES/AP-3A8FVF80

INDUKTIV M8 PNP NO F

Sn=2mm, PIGTAIL M8

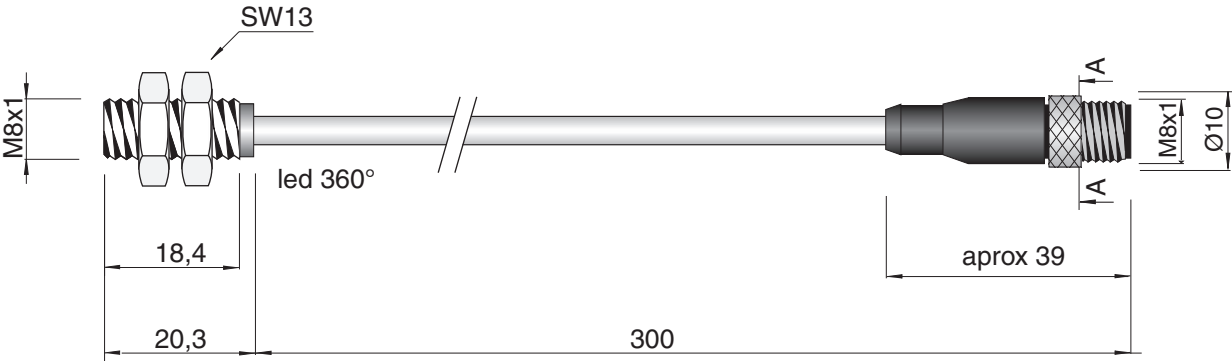

Rated distance	2 mm
Supply voltage U _B	10 - 30 VDC
Ripple max.	10 %
ON-state current max.	100 mA
Max. switching rate	7 kHz
Operating temperature range	-25 - +70°C
No-load supply current	10 mA
Protection degree	IP67
Housing material	Stainless steel AISI 303
Active head material	PBT
Mounting	Embeddable
Standard target	8x8mm FE360

Protection against short circuit, reversal of polarity and inductive peaks.

Built-in

