

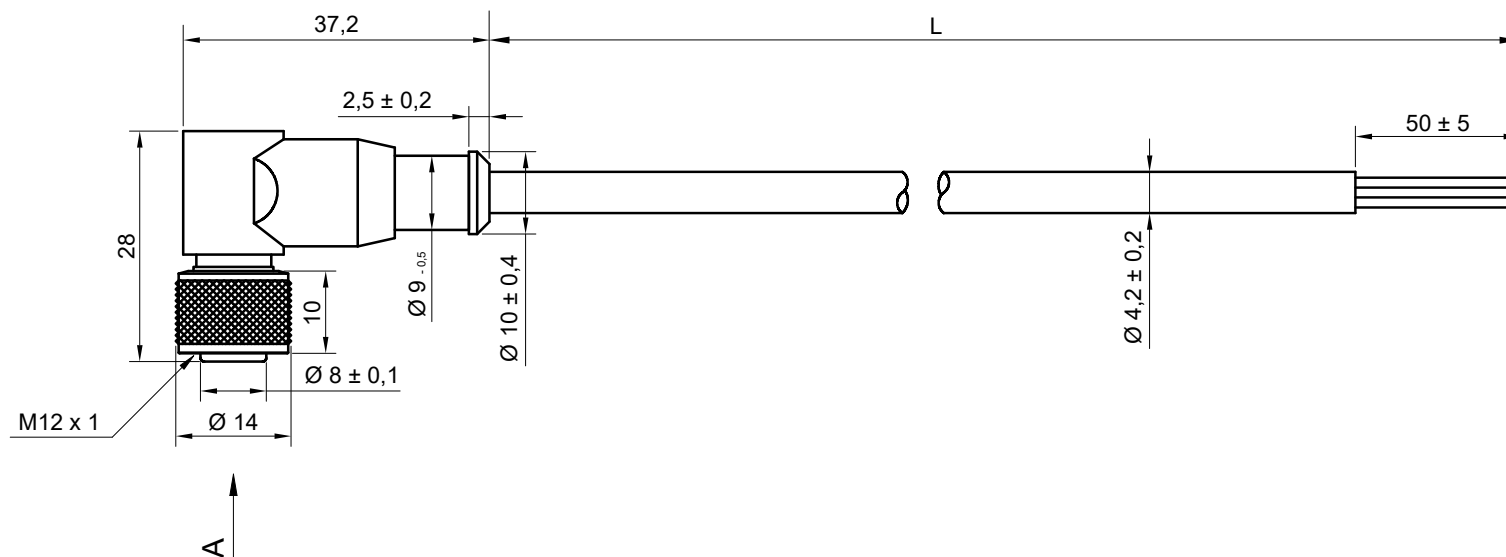




CODE	L(mm)
H3FC-V020	2000 ±50
H3FC-V050	5000 ±1%



Tel +46 (0)8-771 02 20 info@hemomatik.se
Nyckelvägen 7, 142 50 SKOGÅS (Sweden)

 Dim. in mm	Cable Data		Marking		Connection layout	Housing Data		Description:
	Conductors Material:	Electrolytic bare copper	Text:			Standard:	IEC 61076-2-101	
	Composition:	3 x 0,25	Lot description:		VISTA A 	Rated Voltage:	250 V	
	Stranding:	32 x 0,10				Rated Current:	4 A	Customer:
	Shield:		Color:			Insulation:	≥100MΩ (IEC60512)	Customer code:
	Insulation Material:	PVC	Character height:			Contact resistance:	≤10mΩ	
	Jacket Material:	PVC IEC 60332-3-24 Cat.C	Marking position:		1 Brown 3 Blue 4 Black	Fixing screw torque:	min 0,5; max 0,8 N/m	Code:
	Jacket Color:	Black (RAL 9005)	Marking step:			Temperature range:	-25°C...+80°C	Drawn:
						Housing Color:	Black	
						Protection Class:	IP67	Date:
						Contact Material:	CuSn gold plated	
						Mounting:	Anti-vibration system	
						Overmoulding material:	TPU (Polyurethane)	
						Coupling nut material:	CuZn nikel plated	
						O-Ring Material:	FKM (Viton)	
						Contact holder material:	PA +GF	