
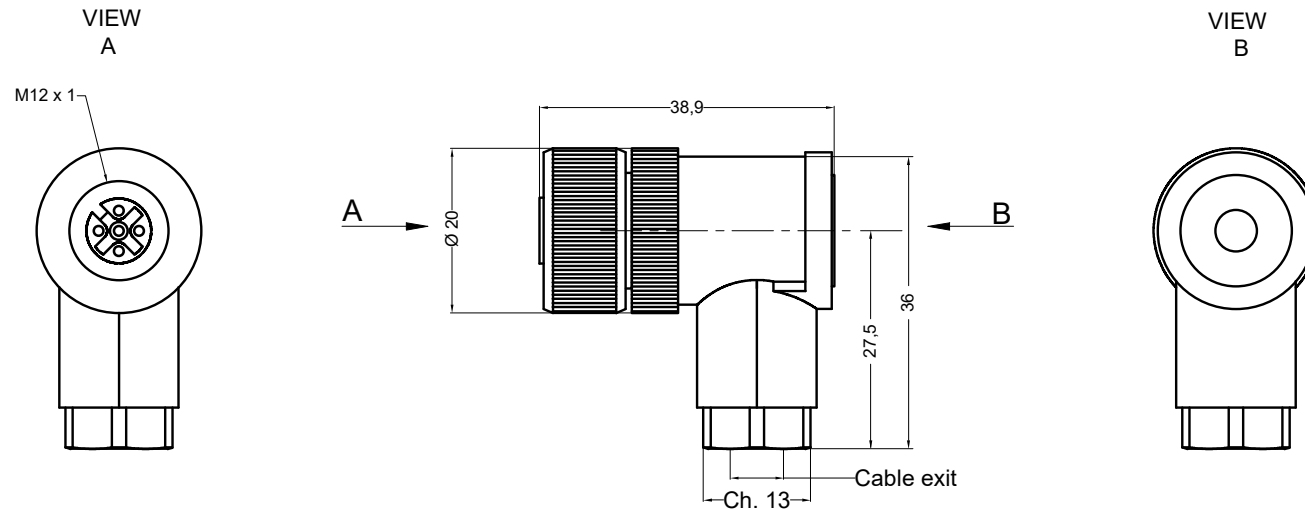






 Dim. in mm	Cable Data		Marking		Connection layout	Housing Data		Description:			
	Wire cross section:	AWG20/ max.0,5mmq	Text:			Standard:	IEC 61076-2-101				
	Cable Ø:	3 – 6 mm	Lot description:			Rated Voltage:	250 V	Customer:			
				Rated Current:		4 A					
			Color:			Insulation:	≥100MQ (IEC60512)	Customer code:			
				Contact resistance:		≤10mohm					
			Character height:			Fixing screw torque:	min 0,5; max 0,8 N/m	Code:			
			Marking position:			Temperature range:	-30°C...+80°C				
				Marking step:			Housing Color:	Black	DW-AC-E4F-VPG7		
						Protection Class:	IP67 (when mounted correctly)				
						Contact Material:	CuZn gold plated	Drawn:			
						Overmoulding material:	PA6	Approved:			
				Coupling nut material:		CuZn nikel plated	Date:				
										O-Ring Material:	NBR
						Contact holder material:	PA6	Revision no.:			
							04/11/2021				