

Laser, standard type
BGS-ZL ^(Laser) series,
BGS-Z ^(LED) series



Laser type and high power narrow beam LED type BGS!

- | Types with sensing distances of 100 mm and 300 mm
- | Industry standard size
- | Highly accurate height difference detection through low hysteresis

HM 2504

Related products

Higher accuracy
BGS-HL, BGS-HDL
● P.310 

Universal voltage type
BGS-2V
● P.384 

Transparent object detection
Z3R-Q
● P.404 

Selection table

Type	Shape	Sensing distance (Adjustable distance range shown in parentheses)	Model (Models in parentheses are connector types)	
			NPN type	PNP type
BGS	Class 1 laser	 5 to 100 mm (20 to 100 mm)	BGS-ZL10N (BGS-ZL10CN)	BGS-ZL10P (BGS-ZL10CP)
		 10 to 300 mm (50 to 300 mm)	BGS-ZL30N (BGS-ZL30CN)	BGS-ZL30P (BGS-ZL30CP)
	High power narrow beam LED	 5 to 100 mm (20 to 100 mm)	BGS-Z10N (BGS-Z10CN)	BGS-Z10P (BGS-Z10CP)
		 10 to 300 mm (50 to 300 mm)	BGS-Z30N (BGS-Z30CN)	BGS-Z30P (BGS-Z30CP)

● For the connector type, please purchase an optional JCN series connector cable.

Options/Accessories

Connector cables

Straight



JCN-S
Cable length: 2 m
JCN-5S
Cable length: 5 m
JCN-10S
Cable length: 10 m

L-shaped



JCN-L
Cable length: 2 m
JCN-5L
Cable length: 5 m
JCN-10L
Cable length: 10 m

Protective mounting bracket

- Ultra-durable 2 mm thick type
- Rust-resistant stainless steel
- Sensor is firmly secured using M3 Hex socket head cap screws
- The bracket is also firmly secured using M6 screws


LK-S01




LK-S02




Laser type application 1 Meander detection of sheet materials

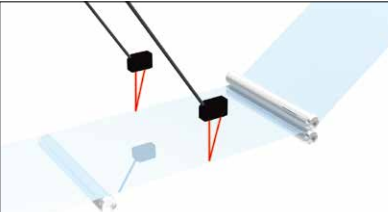

LED type application 1 Detection of multi-colored trays

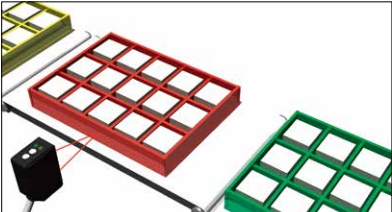

LED type application 2 Detection of items on stainless steel lines

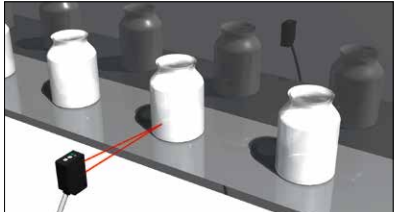

Laser types (Class 1) and high power narrow beam LED types are available

Laser type (equipped with laser OFF input)

The spot size of the laser type is $\phi 1$ mm at 100 mm (short-range type). Optimal for applications that in which **small object detection** and **high repeat accuracy** are required. It is also a Class 1 laser in which eye protection for workers is not necessary.

*Classified as Class II in the US FDA standards.



High power narrow beam LED light source type

Features a **high power narrow beam LED light source**.

Because the spot light can be seen clearly even in bright factories regardless of the LED light, confirmation of detection position is easier than for any other conventional model.

*Compared to conventional models: Using LED light source.





Ideal for height difference detection using low hysteresis

Short-range type hysteresis $\leq 3\%$ (typical value)

A short-range type with a sensing distance of 100 mm that achieves a low hysteresis of $\leq 3\%$. Demonstrates its strength in small height difference detection.

*A mid-range type with a sensing distance of 300 mm that achieves a hysteresis of $\leq 5\%$.

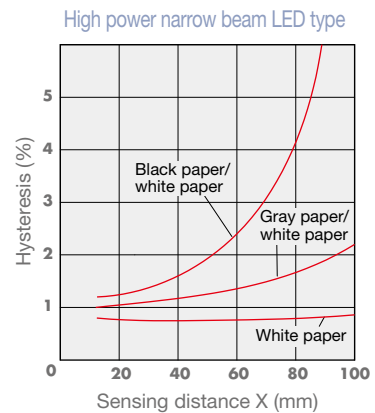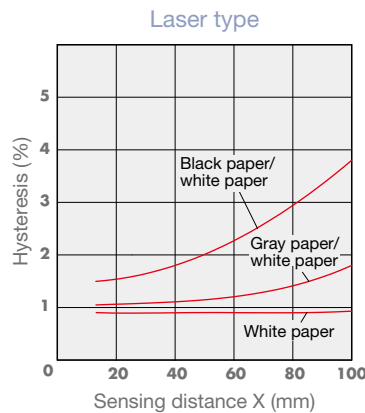

Industry standard size

Mounting hole pitch: 25.4 mm

Features an industry standard pitch of 25.4 mm.



Specifications

Type			Short-range type (laser)	Mid-range type (laser)	Short-range type (LED)	Mid-range type (LED)
Model	NPN	Cable type	BGS-ZL10N	BGS-ZL30N	BGS-Z10N	BGS-Z30N
		Connector type	BGS-ZL10CN	BGS-ZL30CN	BGS-Z10CN	BGS-Z30CN
	PNP	Cable type	BGS-ZL10P	BGS-ZL30P	BGS-Z10P	BGS-Z30P
		Connector type	BGS-ZL10CP	BGS-ZL30CP	BGS-Z10CP	BGS-Z30CP
Sensing distance			5 to 100 mm ^{*1}	10 to 300 mm ^{*1}	5 to 100 mm ^{*1}	10 to 300 mm ^{*1}
Adjustable distance range			20 to 100 mm ^{*1}	50 to 300 mm ^{*1}	20 to 100 mm ^{*1}	50 to 300 mm ^{*1}
Light source			Red semiconductor laser Class 1 (IEC/JIS) ^{*2} Wavelength: 650 nm, Maximum output: 3.5 mW		Red LED	
Spot size (focal length)			Approx. ø1 mm ^{*3} Distance: 100 mm (at normal temperatures)	Approx. ø1.5 mm ^{*3} Distance: 300 mm (at normal temperatures)	Approx. ø10 mm Distance: 100 mm	Approx. ø30 mm Distance: 300 mm
Response time			250 μs or less		500 μs or less	
Hysteresis			3%	5%	3%	5%
Distance adjustment			4-turn endless potentiometer			
Indicators			Output indicator (orange) Laser emission indicator (green)		Output indicator (orange) Stability indicator (green)	
Control output			NPN/PNP type open collector Max. 100 mA/30 VDC			
Output mode			Light ON / Dark ON selectable			
Connection type			Cable type: Cable length: 2 m ø3.8 mm / Connector type: M8, 4-pin			
Rating	Supply voltage		10 to 30 VDC, including 10% ripple (p-p)			
	Current consumption		30 mA or less			
Applicable regulations			EMC directive (2004/108/EC) / FDA regulations (21 CFR 1040.10)		EMC directive (2004/108/EC)	
Applicable standards			EN 60947-5-2			
Company standards			Noise resistance: Feilen Level 3 cleared			
Environmental resistance	Ambient temperature/humidity		-10 to +50°C (no freezing) 35 to 85% RH (no condensation)		-25 to +55°C (no freezing) 35 to 85% RH (no condensation)	
	Ambient illuminance		Sunlight: 10,000 lx Incandescent lamp: 3,000 lx			
	Vibration resistance		10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions			
	Shock resistance		Approx. 50 G (500 m/s ²); 3 times in each of the X, Y, and Z directions		Approx. 100 G (1000 m/s ²); 3 times in each of the X, Y, and Z directions	
	Degree of protection		IP67			
Material			Housing: ABS (glass fiber filled), Front cover: PMMA			
Weight without cable			Approx. 10 g			
Included accessories			Mounting bracket: BEF-W100-B ^{*4}			

*1. Using a 100 × 100 mm white sheet of paper.

*2. Classified as Class II in the US FDA standards.

*3. Defined with center strength 1/e² (13.5%). There may be light leakage outside of the specified spot size. The sensor may be affected when there is a highly reflective object close to the target area.


*4. Mounting bracket BEF-W100-A is included with the connector type.

● Specifications are subject to change without prior notice for product improvement purposes.


I/O circuit diagram

Laser type: **BGS-ZL10**□/ **BGS-ZL30**□

■ NPN output type

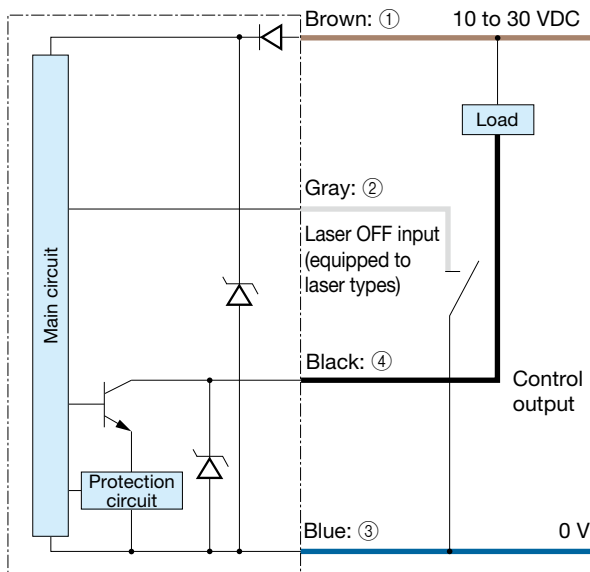

■ PNP output type

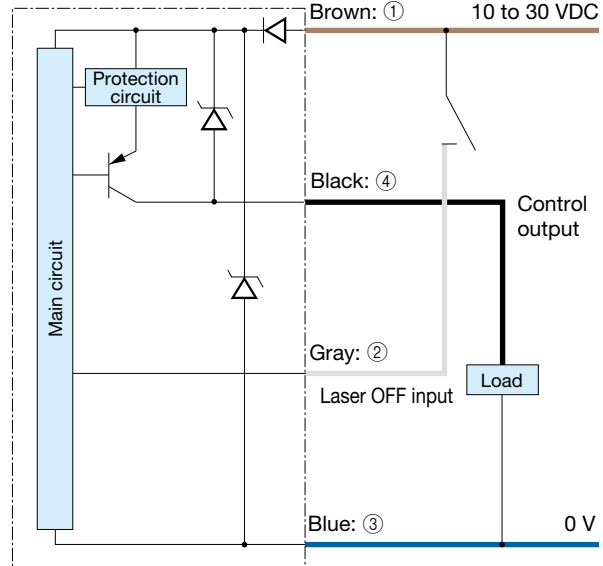

■ Connector type

(Pin configuration) Sensor side Connector cable side




- ① 10 to 30 VDC
- ② Laser OFF input (laser type only)
- ③ 0 V
- ④ Control output

Connecting

- ① to ④ are connector pin No.

Notes

- Connect frame ground to the earth when the switching regulator is used for power supply.
- Because wiring sensor wires with high-voltage wires or power supply wires can result in malfunctions due to noise, which can cause damage, make sure to wire separately.
- Avoid using the transient state while the power is on (approx. 100 ms).
- The connector direction is fixed as in the drawing to the right when you use L-shaped connector cable. Be aware that rotation is not possible.



Laser light precautions

This product emits a Class 1 (II) visible laser beam that is compliant with IEC/JIS, FDA laser safety standards.

Warning and explanation labels are affixed to the sides of the sensor.



Warning Do not look directly at the laser or intentionally shine the laser beam in another person's eyes.


**CLASS 1
LASER PRODUCT**

Dimensions


Sensor

■ Cable type

(Unit: mm)

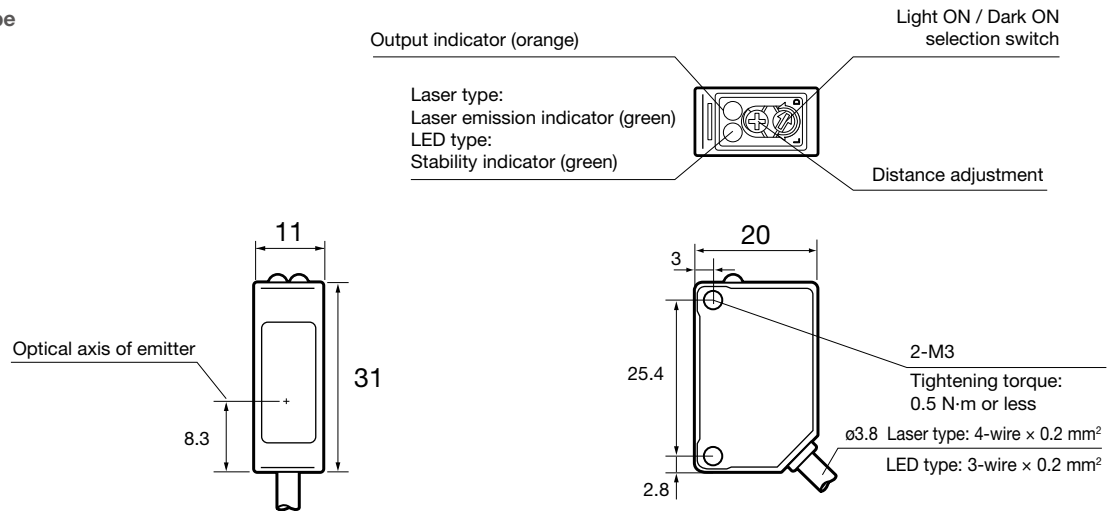


■ Connector type

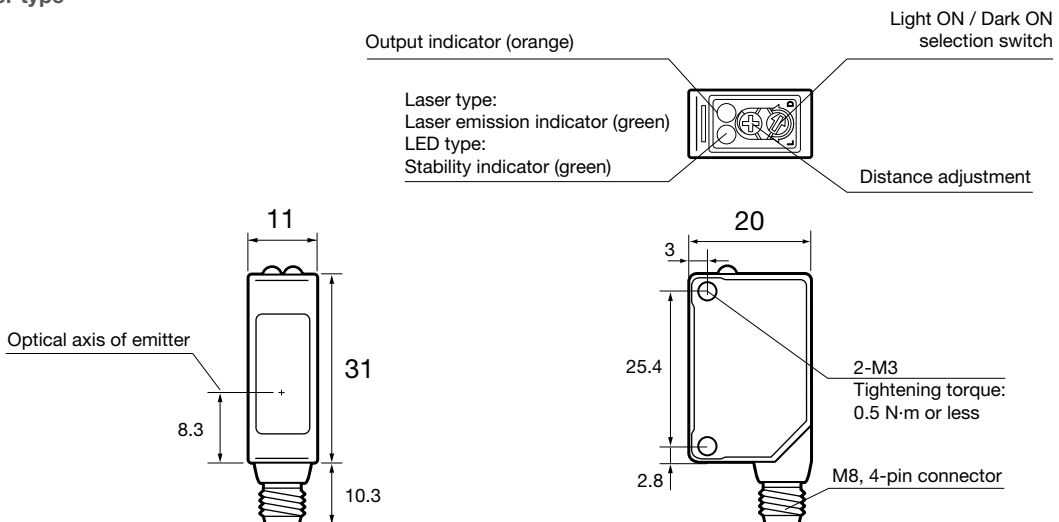


Connector cable (optional)

■ JCN-S, JCN-5S, JCN-10S

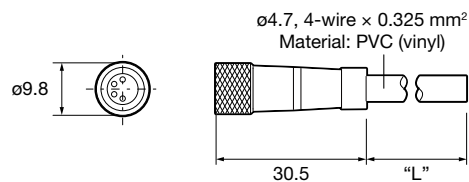

■ JCN-L, JCN-5L, JCN-10L

Photoelectric
SensorsSpecialized
Photoelectric
SensorsLaser
Displacement
Sensors

BGS Sensors

BGS-HL,
BGS-HDL

BGS-DL

BGS-ZL,
BGS-Z

BGS-ZM

BGS-S,
BGS-2S

BGS

BGS-DL
(potentiometer type)

Photoelectric
Sensors

Specialized
Photoelectric
Sensors

Laser
Displacement
Sensors

BGS Sensors

BGS-HL,
BGS-HDL

BGS-DL

BGS-ZL,
BGS-Z

BGS-ZM

BGS-S,
BGS-2S


BGS

BGS-DL
(potentiometer type)


Mounting bracket

(Unit: mm)





■ Cable type (when using BEF-W100-B)

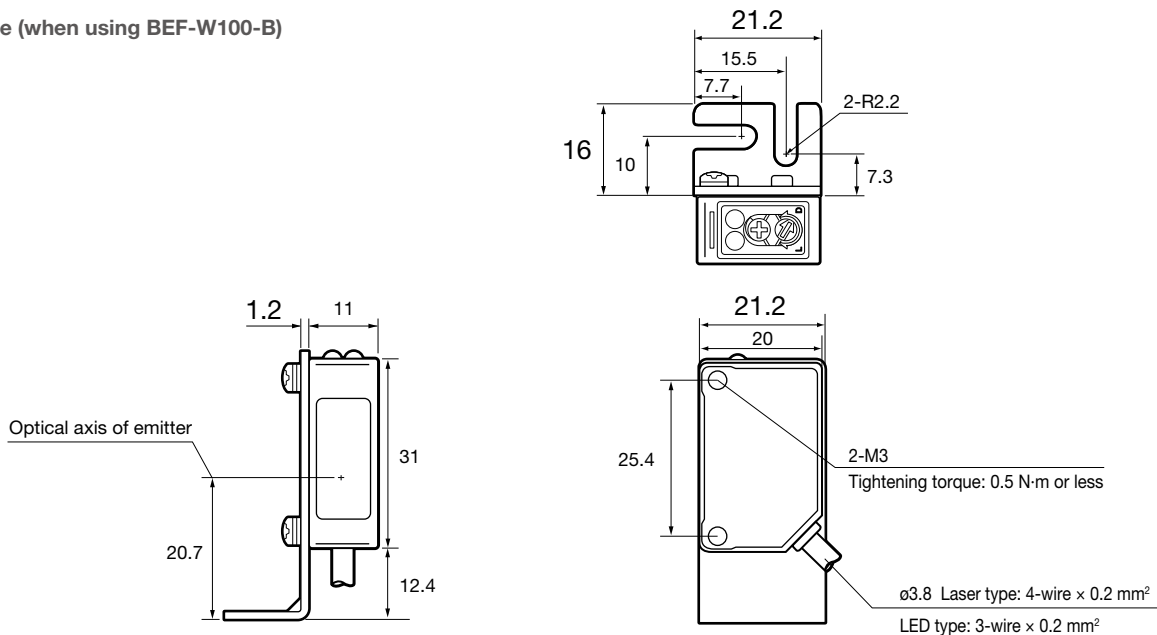


■ Connector type (when using BEF-W100-A)

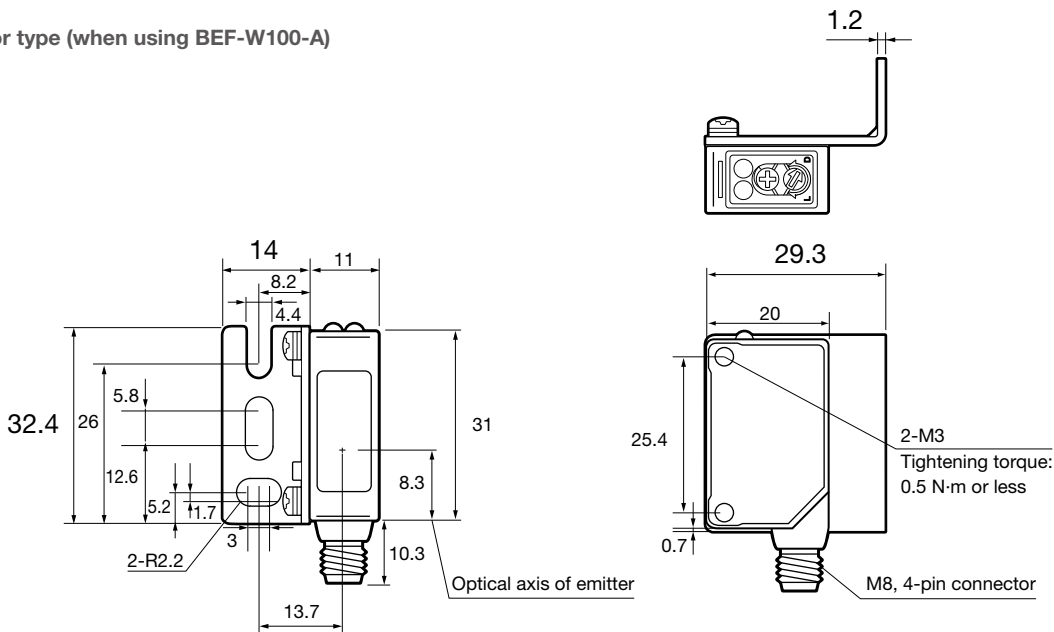

Typical characteristic data

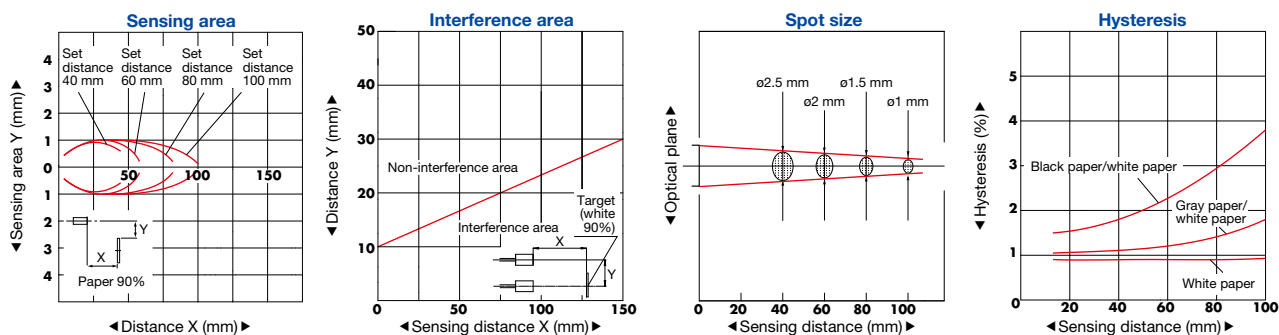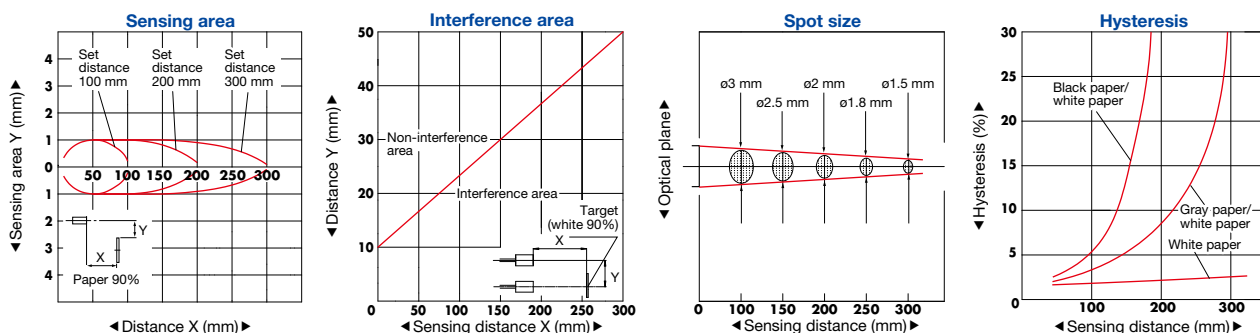BGS-ZL10 □ Laser type**BGS-ZL30** □ Laser type

BGS-Z10 LED type

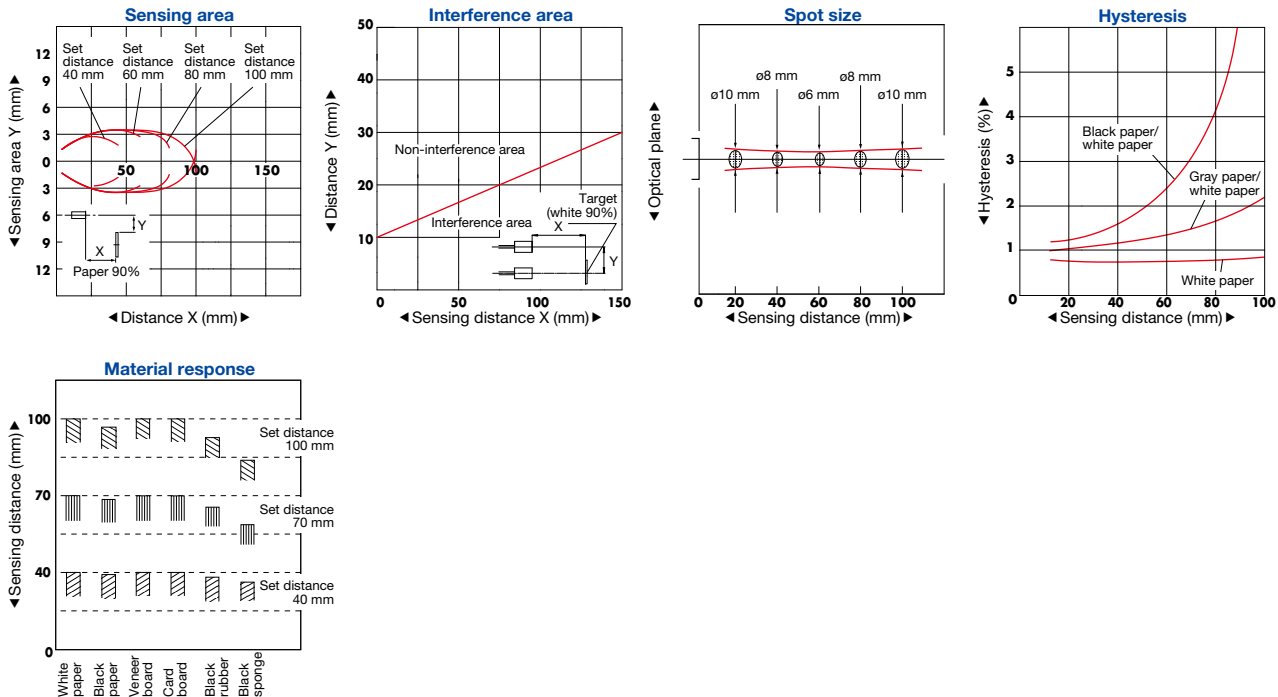

BGS-Z30 LED type

