



HEMOMATIK SWEDEN	Scale 1:1	Liquid level switch	Art.no. HM-RFS12P-2	
		with connector	Drawing no. XX	Rev. 3
Approved			Date 941123	Sign. MEM
			Rev.date 080422	Art.group

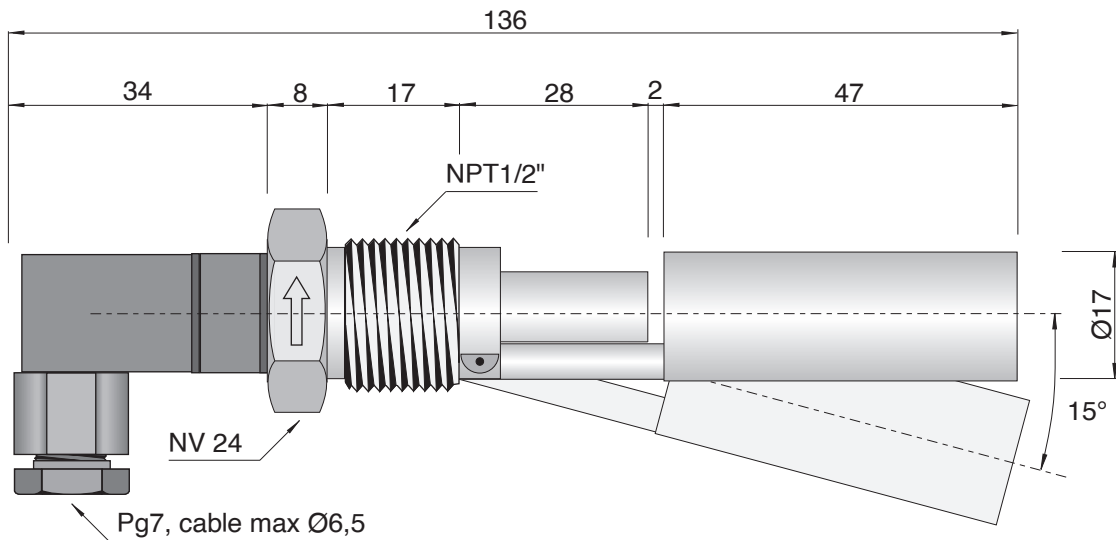


Switching points in water
(average values)

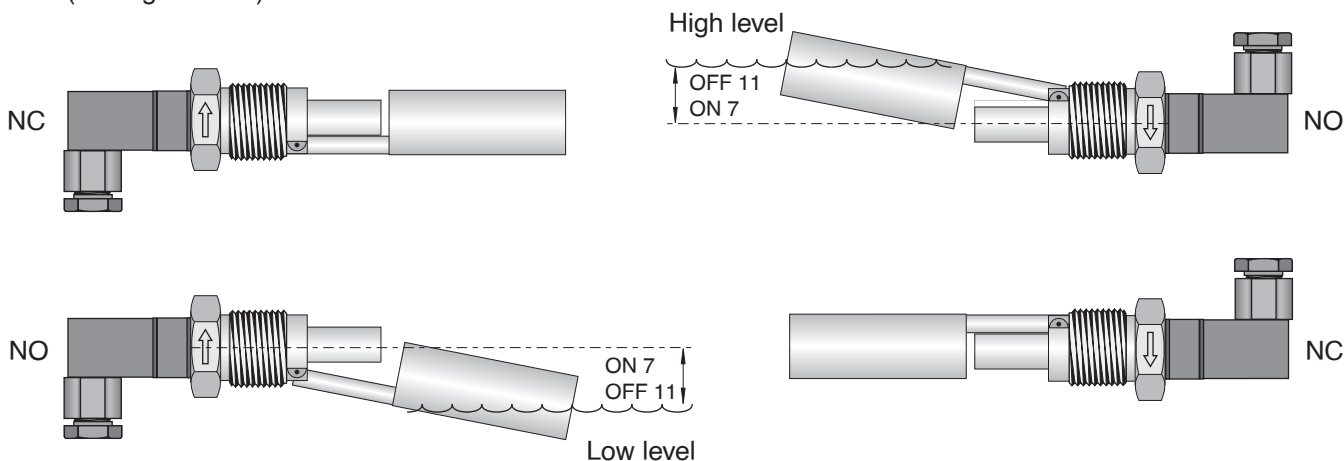

Delivery status of connector is for vertical mounting.
Make sure pivot of the float is down for NO going low
or up for NC going low.

Connector can be mounted up, down or sideways.

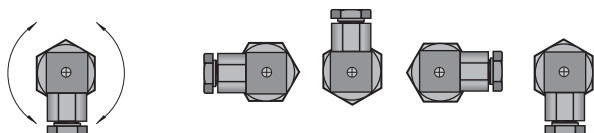

Connector	Polyamid, IP65
Fitting	SUS304
Float	SUS304
max. temp	-40°C...+120°C
max pressure	5Kg/cm ² (IP68)
Contact rating*	50VA
max voltage	3-48 V AC/DC
max current	0,5A

*= resistiv load