




Note! Read this instruction before installation and use

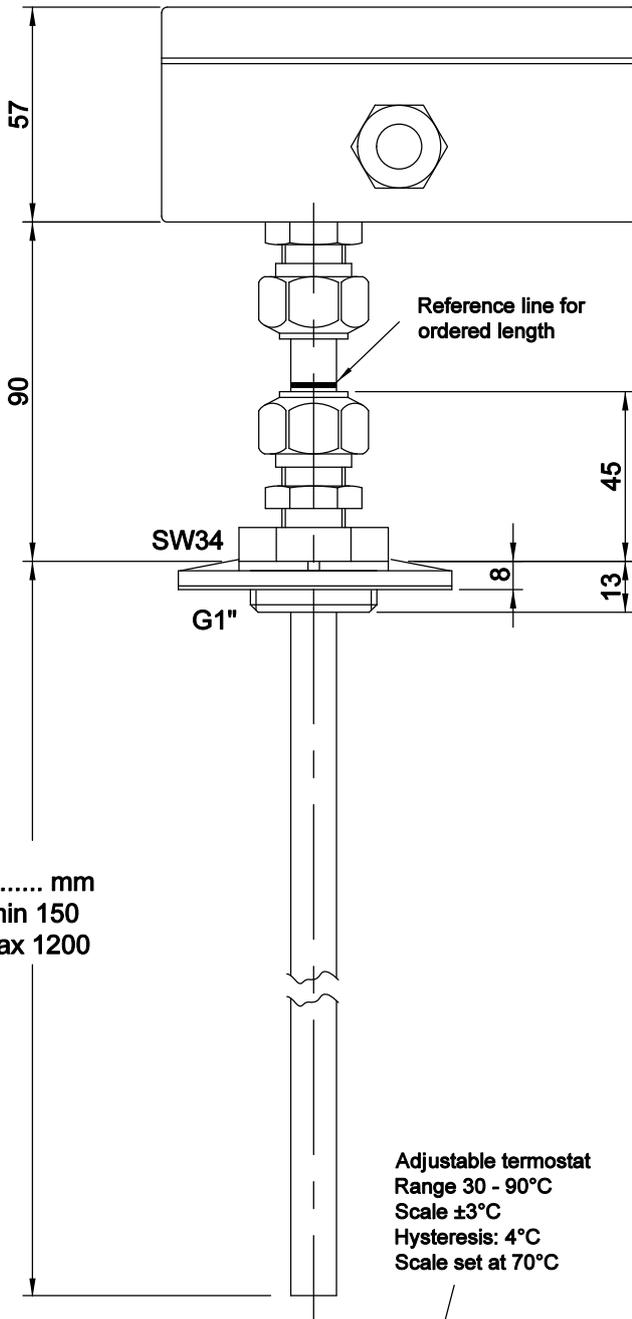

**FEATURES**

Termostat, adjustable switch point between 30 and 90°C. Chang over NO+NC output.

**MATERIALS**

Probe : Brass  
Fitting : Brass  
Flange : PA6  
Gasket : Nitrile  
Terminal box: powder-coated aluminum  
Temp. media : -20...+100°C  
Temp. ambient : -20...+70°C  
For use 0-5000m above MSL

**PROTECTION DEGREE**

Terminal box : IP67  
Probe : IP68

**INSTALLATION**


Adjustable compression fitting, when the nut is tightened, the coupling is fixed to the probe.

**ELECTRICAL MAX DATA**

Contact rating *	70 VA
Voltage	3-230 V AC/DC DC to 60Hz
Current	2 A

\* = resistive load

**WARNING!** If no protective earth is connected to the sensor, the supply voltage must not exceed 48V AC/DC

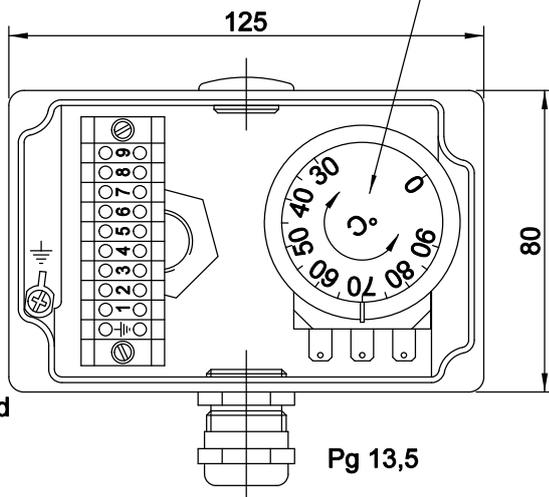

■ = Switch closed  
□ = Switch open