


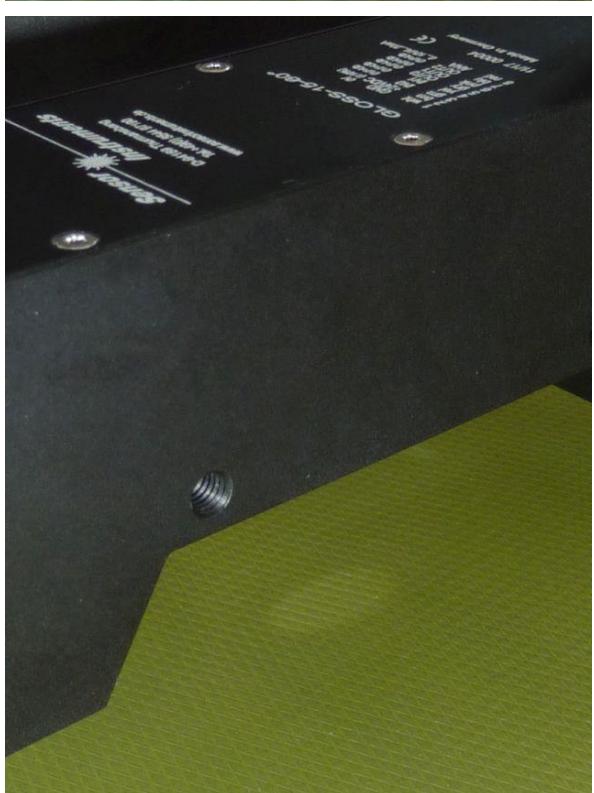
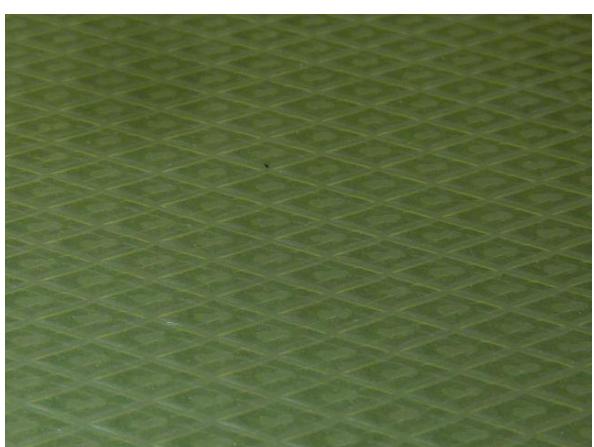
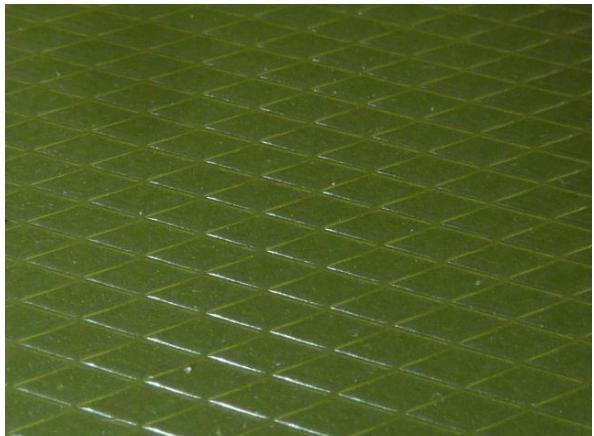


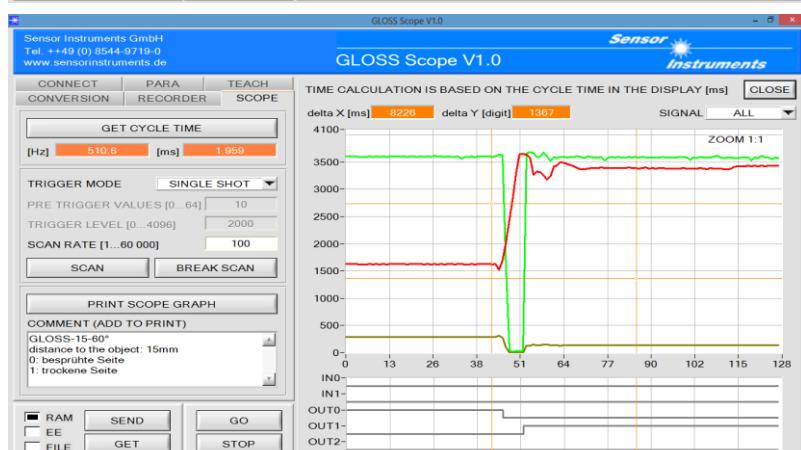

### 1. Differentiation of coated and uncoated plastic film

An uncoated plastic film should be distinguished from a coated plastic film. For this purpose, a gloss sensor type **GLOSS-15-60°** is used. At this, the distance from the sensor to the object is approximately 15mm and the spot size is around 10mm x 16mm. The two sides can be properly differentiated as shown in the screenshots.

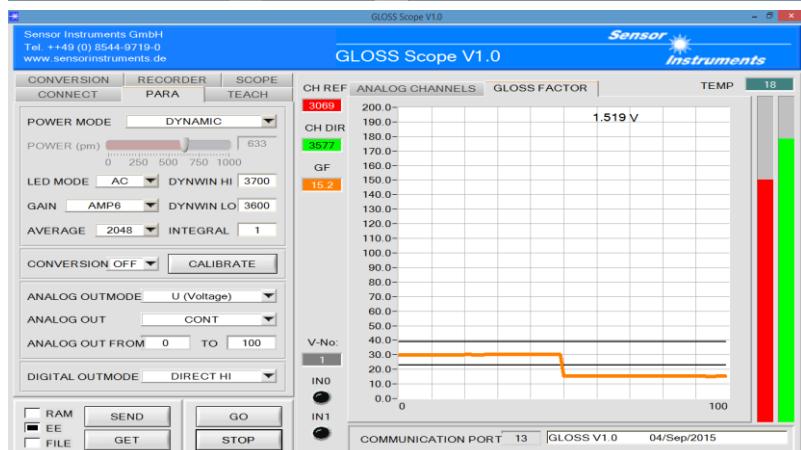



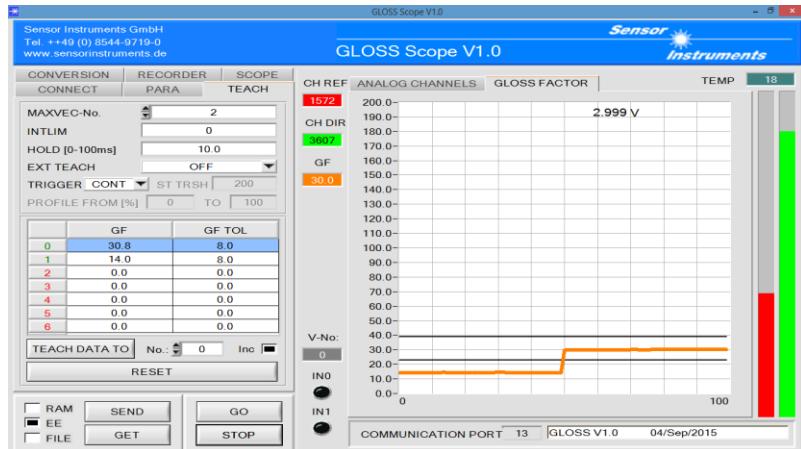


# Application - News

## N°695 GLOSS series

### 1. Gloss measurement of leather imitations

The gloss of leather interior imitations should be measured. For this purpose, a gloss sensor type **GLOSS-15-60°** is used at a distance of approximately 15mm from the surface of the object. At this, the spot size is around 16mm x 10mm, elliptically in shape. The gloss can be proper measured as shown in the screenshots.

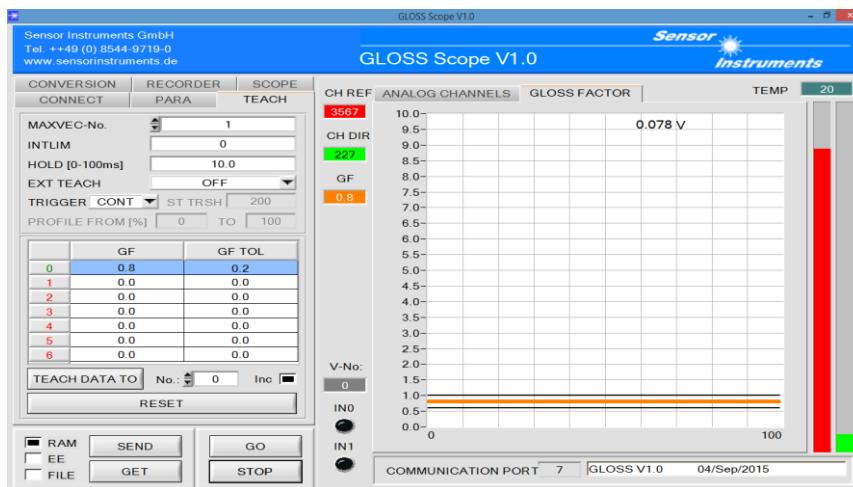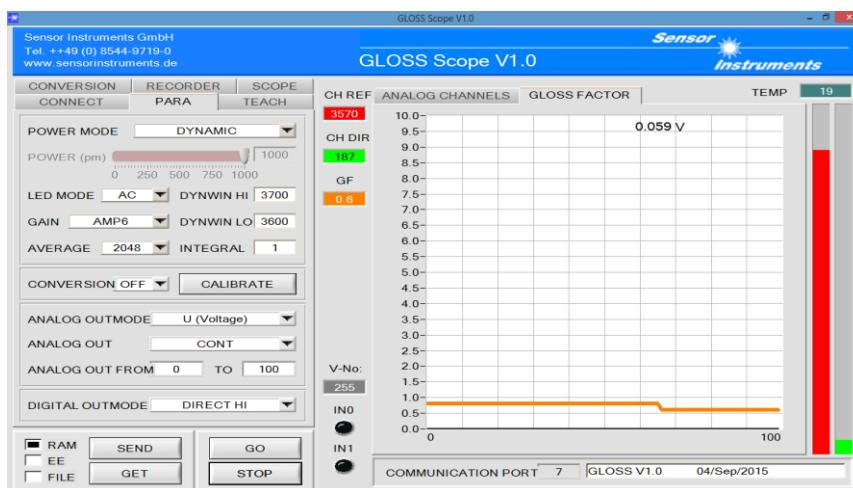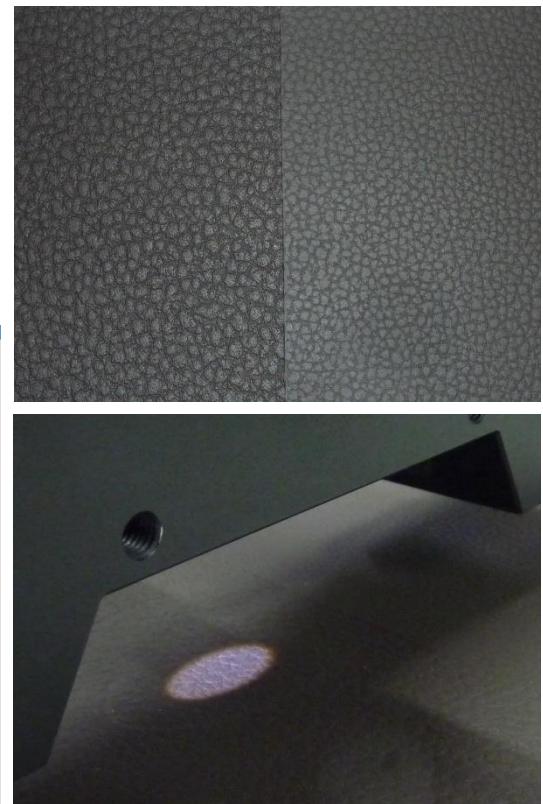






# Application - News

## N°766 GLOSS series

### 1. Gloss measurement on decorative films

The gloss factor should be measured on different decorative films. For this purpose, a gloss sensor type **GLOSS-15-60°** is used. At this, the distance from the sensor to the object is approximately 15mm and the spot size at this distance is around 20mm x 10mm (elliptical shape). The gloss factor can be proper measured as shown in the screen shots.

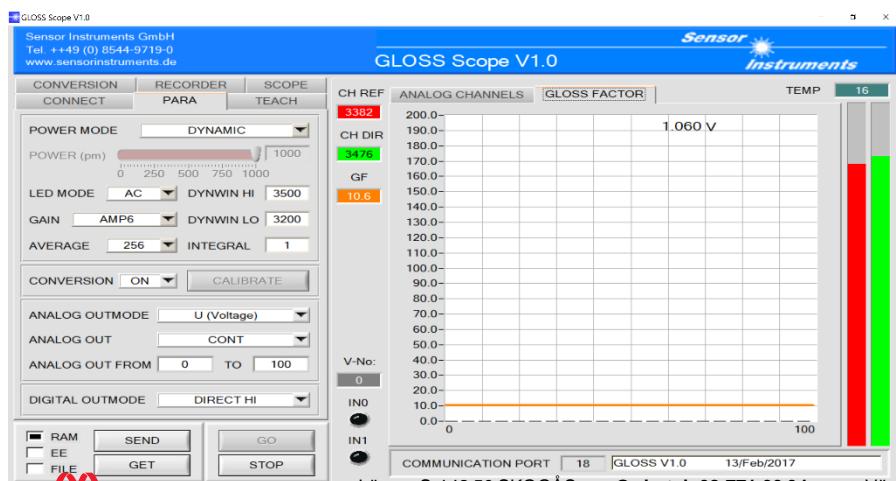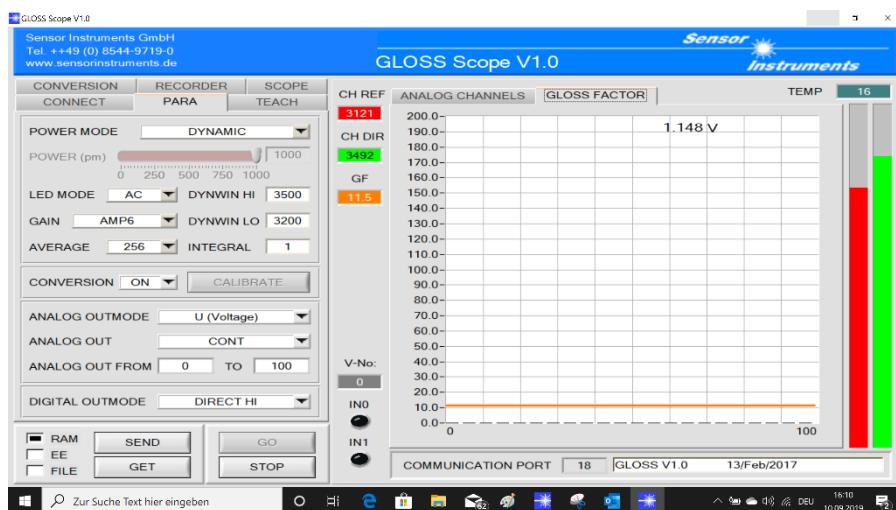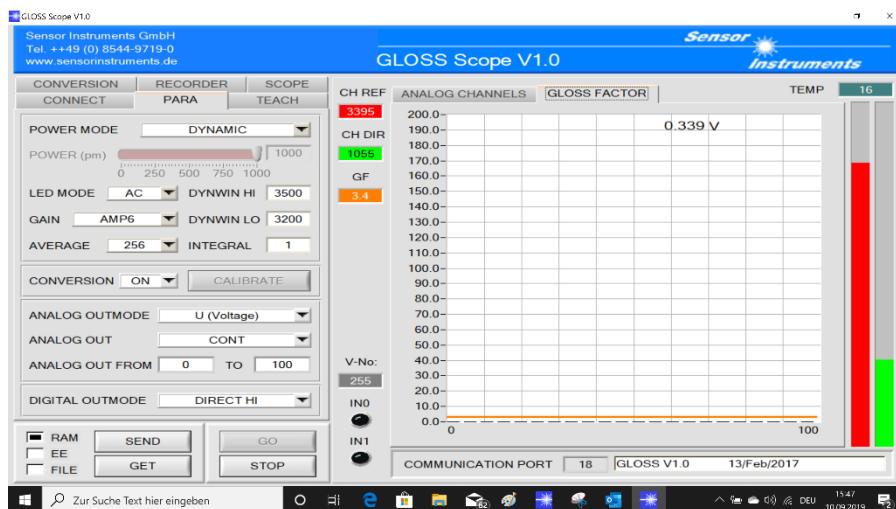







# Application - News

## N°767 GLOSS series

### 1. Gloss measurement of lacquered aluminum plates





The gloss factor of lacquered aluminum plates should be measured. For this purpose, a gloss sensor type **GLOSS-15-60°** is used. At this, the distance from the gloss sensor to the object is approximately 15mm and the spot size at this distance is around 20mm x 10mm (elliptical in shape). The gloss factor can be proper measured, as shown in the screen shots.

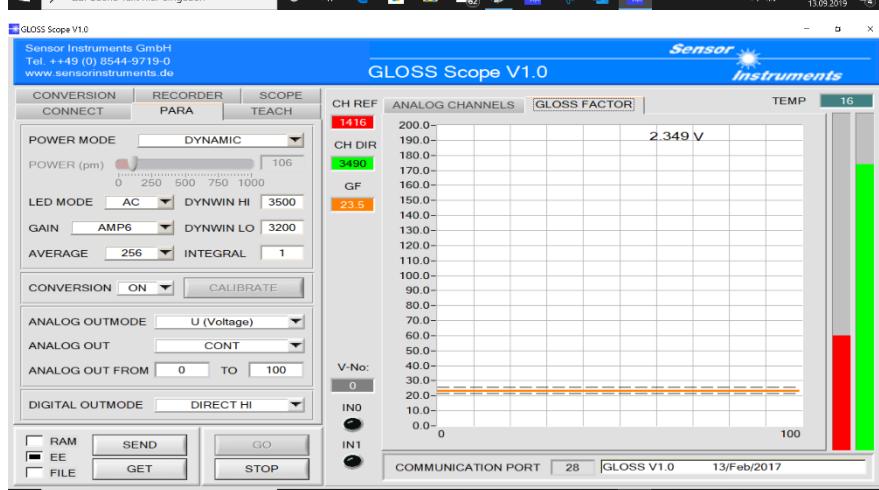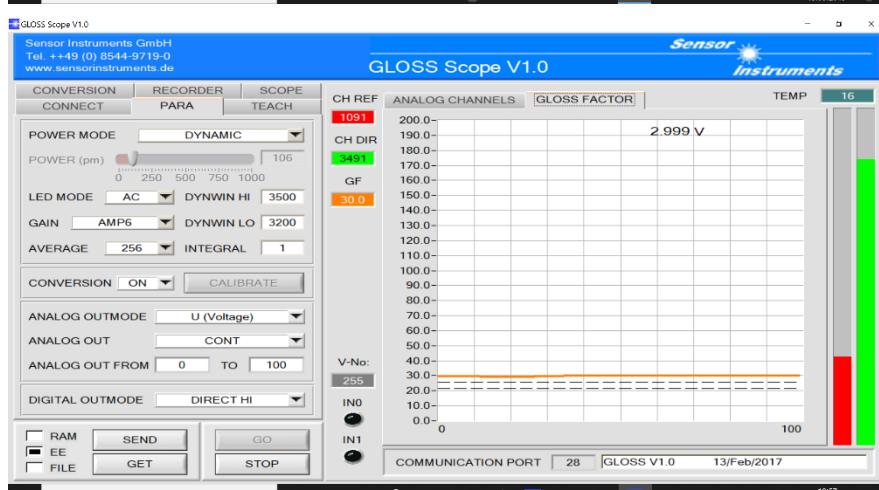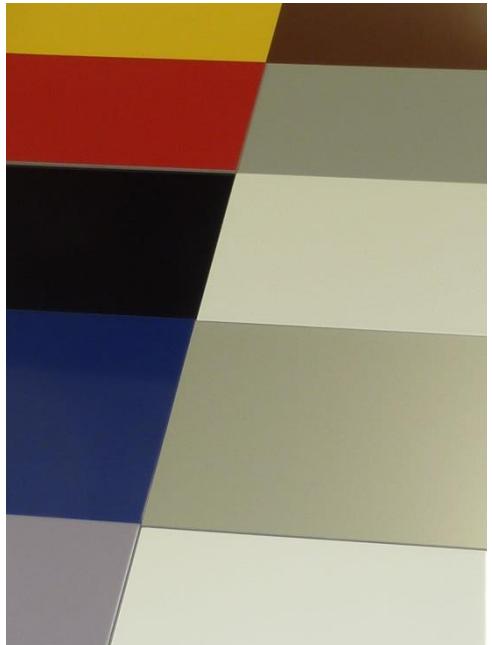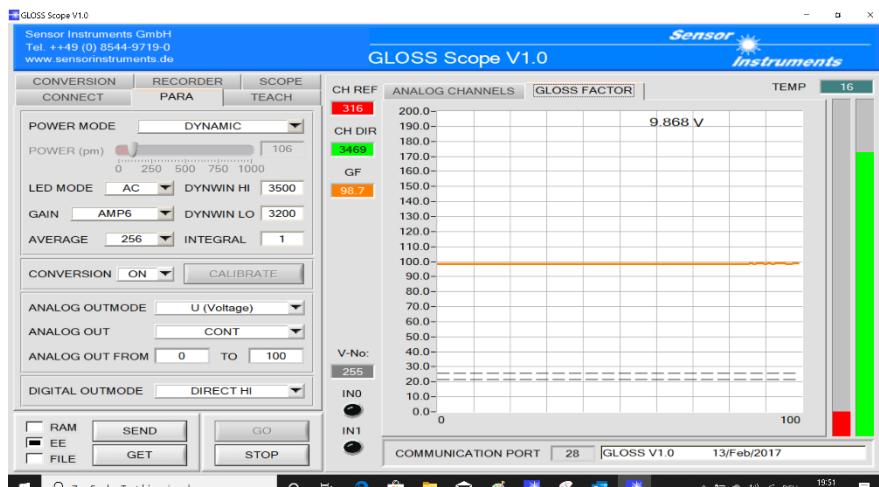



## 1. Gloss measurement of sandpapers

The gloss factor of sandpapers should be measured. For this purpose, a gloss sensor type **GLOSS-15-60°** is used. At this, the distance from the sensor to the object is approximately 15mm and the spot size at this distance is around 20mm x 10mm (elliptical in shape). The gloss factor of the sandpapers can be proper measured as shown in the screenshots.

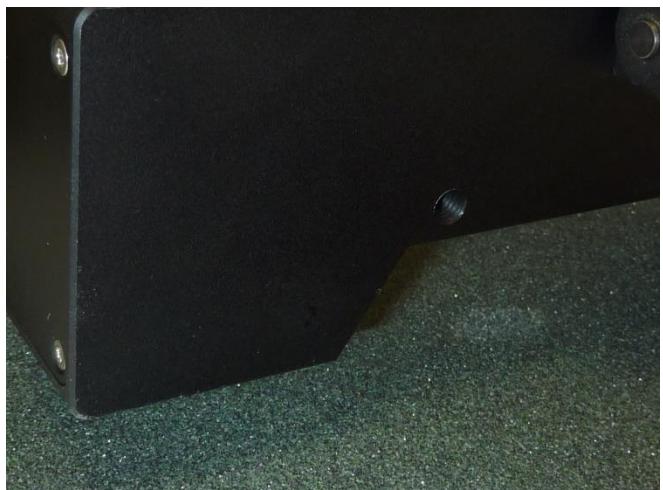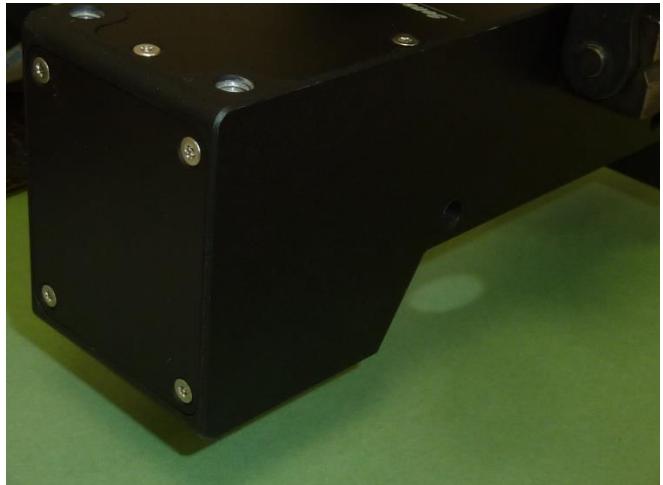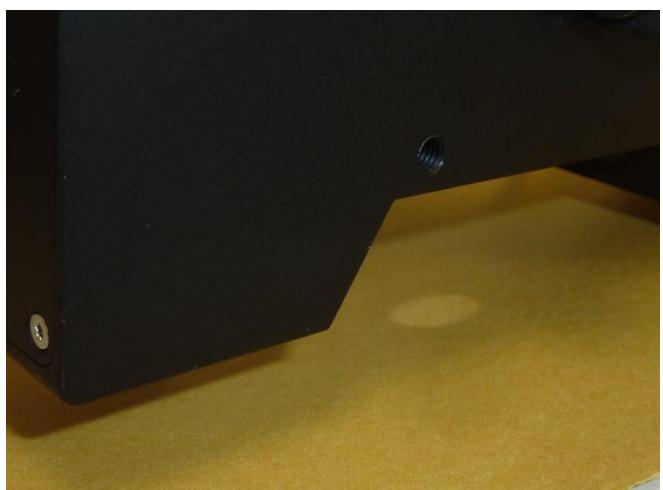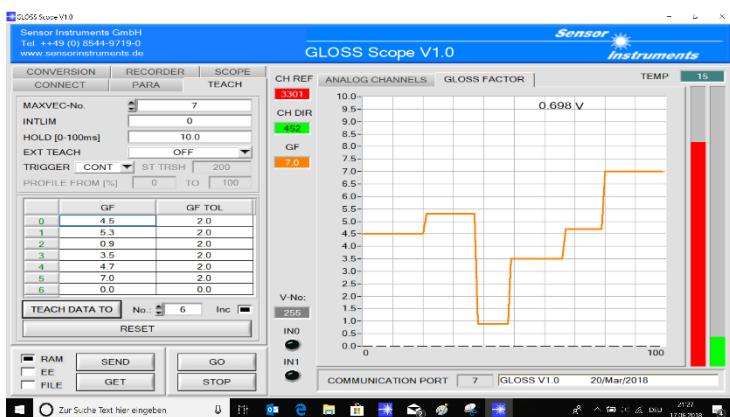



# Application - News

## N°790 GLOSS series

### 1. Gloss measurement of synthetic floorings

The gloss of plastic floors should be measured. For this purpose, a gloss sensor type **GLOSS-5-85°** is used. At this, the distance from the sensor to the object is approximately 5mm and the spot size at this distance is around 10mm x 100mm. The gloss can be proper measured as shown in the screen shots.

