



## Online Data sheet

HM 2602

### Encoder WDGA 58E CAN SAE J1939

[www.wachendorff-automation.com/wdga58esaej1939](http://www.wachendorff-automation.com/wdga58esaej1939)

#### Wachendorff Automation

##### ... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network



Nyckelvägen 7  
142 50 SKOGÅS, Sweden

Tel: +46 (0)8 771 02 20  
[info@hemomatik.se](mailto:info@hemomatik.se)

[www.hemomatik.se](http://www.hemomatik.se)

**IndustrieROBUST**

# Encoder WDGA 58E absolute CAN SAE J1939, with EnDra® Technology



Illustration similar

**EnDra®**  
Technologie

**SAE J1939**

- EnDra® Technology maintenance-free and environmentally friendly
- CAN SAE J1939 protocol
- Single-turn/Multi-turn (16 bit / 32 bit)
- Forward-looking technology with 32 Bit processor

[www.wachendorff-automation.com/wdga58esaej1939](http://www.wachendorff-automation.com/wdga58esaej1939)

Mechanical Data	
Flange	hollow shaft (blind-bored)
Flange material	aluminum
Housing material	Aluminum die cast, powder coated; Integrated magnetic shielding
Torque supports	incl. 1 torque support WDGDS10001
- 1. Spring plate compensation	axial: $\pm 0.8$ mm [0.0315"], radial: $\pm 0.2$ mm [0.0079"]
- Max. operating speed	6000 rpm up to max. protection rating +60 °C
- 2. Cylinder pin 4 mm	needs accessories WDGDS10005
- Compensation	axial: $\pm 0.5$ mm [0.0197"], radial: $\pm 1.5$ mm [0.0591"], Max. operating speed: 3000 rpm
Flange diameter	$\varnothing 58$ mm [ $\varnothing 2.283$ "]
Shaft(s)	
Shaft material	stainless steel
Starting torque	approx. 1.6 Ncm [2.266 in-ozf] at ambient temperature
Fixing	permanently attached clamping ring
Shaft	$\varnothing 6$ mm [ $\varnothing 0.236$ "]
Advice	with adapter sleeve
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	$\varnothing 6.35$ mm [ $\varnothing 1/4$ "] Order No: 2Z
Advice	with adapter sleeve
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	$\varnothing 7$ mm [ $\varnothing 0.276$ "]
Advice	with adapter sleeve
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]

Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	$\varnothing 8$ mm [ $\varnothing 0.315$ "]
Advice	with adapter sleeve
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	$\varnothing 9.525$ mm [ $\varnothing 3/8$ "] Order No: 4Z
Advice	with adapter sleeve
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	$\varnothing 10$ mm [ $\varnothing 0.394$ "]
Advice	with adapter sleeve
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	$\varnothing 12$ mm [ $\varnothing 0.472$ "]
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	$\varnothing 14$ mm [ $\varnothing 0.551$ "]
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]

Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]
Shaft	Ø 15 mm [Ø 0.591"]
Shaft length	L: 12 mm [0.472"]
Insertion depth min.	11 mm [0.433"]
Insertion depth max.	15 mm [0.591"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]

#### Bearings

Bearings type	2 precision ball bearings
Nominal service life	1 x 10 <sup>9</sup> revs. at 100 % rated shaft load 1 x 10 <sup>10</sup> revs. at 40 % rated shaft load 1 x 10 <sup>11</sup> revs. at 20 % rated shaft load
Max. operating speed	6000 rpm

#### Machinery Directive: basic data safety integrity level

MTTF <sub>d</sub>	1000 a
Mission time (TM)	20 a
Nominal service life (L10h)	1 x 10 <sup>11</sup> revs. at 20 % rated shaft load and 6000 rpm
Diagnostic coverage (DC)	0 %

#### Electrical Data

Power supply/Current consumption	4,75 VDC up to 32 VDC: typ. 50 mA
Power consumption	max. 0.5 W
Operating principle	magnetic

#### Sensor data

Single-turn technology	innovative hall sensor technology
Single-turn resolution	65.536 steps/360° (16 bit)
Single-turn accuracy	± 0.0878° ( 12 bit)
Single-turn repeat accuracy	± 0.0878° ( 12 bit)
Internal cycle time	600 µs
Multi-turn technology	patented EnDra® technology no battery, no gear.
Multi-turn resolution	up to 32 bit

#### Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
Includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3 DIN EN 61326-1
Vibration: (DIN EN 60068-2-6)	300 m/s <sup>2</sup> (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	5000 m/s <sup>2</sup> (6 ms)
Electrical Safety:	Accordinging DIN VDE 0160
Turn on time:	<1,5 s

#### Duty information

Customs tariff number:	90318020
Country of origin:	Germany

Interface	
<b>Interface:</b>	<b>CAN</b>
CAN physical layer:	ISO 11898 (High Speed CAN)
Protocol:	ISO 11898 (High Speed CAN)
Baud rate:	Auto-Baud-Detection
Standard Preset configuration:	(other configurations on request)
Direction of counting:	(View from shaft end) ccw
ECU-address:	0x 0A
Process data Identifier:	0x18FF000A
PGN:	0xFF00
Process data mapping:	Byte 0-3 32 Bit Position Value Byte 4 8 Bit Error Register PDU timer and Position Preset can be adjusted by PGN configuration 0xEF00 (Prop. A)
PDU - Time:	50 ms (default)
Configuration - PGN:	0x EF 00 (Prop.A)
Byte 0:	0x 01
Byte 1:	0x FF
Byte 2:	PDU time LSB
Byte 3:	PDU time MSB
Byte 4:	Preset LSB
Byte 5, 6:	Preset
Byte 7:	Preset MSB
Application Note	<a href="https://www.wachendorff-automation.com/sae-appl-note">https://www.wachendorff-automation.com/sae-appl-note</a>


#### General Data

Weight	approx. 220 g [7.76 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65; cable outlet L1: IP40
Operating temperature	-40 °C up to +85 °C [-40 °F up to 185 °F]
Storage temperature	-40 °C up to +100 °C [-40 °F up to 212 °F]

#### More Information

General technical data and safety instructions  
<http://www.wachendorff-automation.com/gtd>  
Options  
<http://www.wachendorff-automation.com/acc>

**Connector, M12x1, radial, CC5, 5-pin**

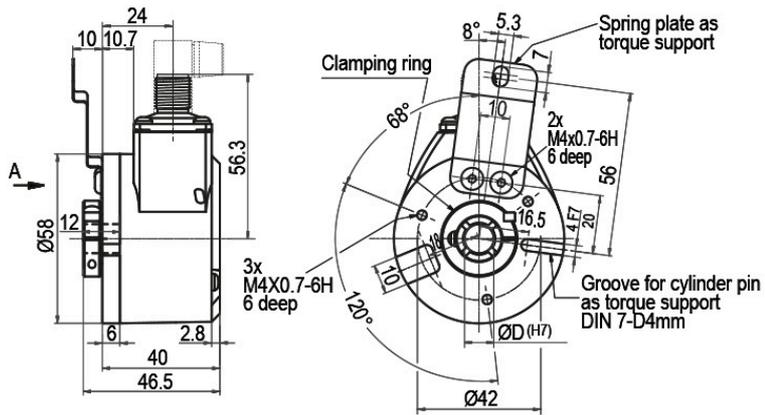


**Description**

**CC5** radial, 5-pin, shield connected to encoder housing

Assignments	
	<b>CC5</b> 
<b>(+) Vcc</b>	2
<b>GND</b>	3
<b>CANHigh</b>	4
<b>CANLow</b>	5
<b>CANGND shield</b>	1

**Cable connection, L3 radial with 2 m cable**

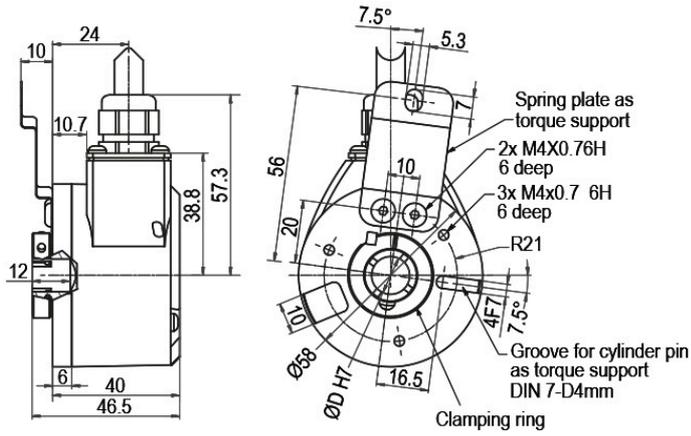

**Description**

**L3** radial, shield connected to encoder housing

Assignments	
	<b>L3</b>
<b>(+) Vcc</b>	BN
<b>GND</b>	WH
<b>CANHigh</b>	GN
<b>CANLow</b>	YE
<b>CANGND shield</b>	shield

## Options

### Low-friction bearings

The encoder WDGA 58E CAN SAE J1939 is also available as a particularly smooth-running low-friction encoder. The starting torque is thereby changed to approx. 0.6 Ncm [0.85 in-ozf] at ambient temperature and the protection class at the shaft input to IP50.

### Order key

**AAC**

### 120 Ohm terminating resistor

The encoder WDGA 58E CAN SAE J1939 is also available with fixed 120 Ohm terminating resistor.

### Order key

**AEO**

Example Order No.	Type	Your encoder
WDGA 58E	WDGA 58E	WDGA 58E
	<b>Shaft</b>	<b>Order key</b>
06	Ø 6 mm [Ø 0.236"] with adapter sleeve	06
	Ø 6.35 mm [Ø 1/4"] Order No: 2Z with adapter sleeve	2Z
	Ø 7 mm [Ø 0.276"] with adapter sleeve	07
	Ø 8 mm [Ø 0.315"] with adapter sleeve	08
	Ø 9.525 mm [Ø 3/8"] Order No: 4Z with adapter sleeve	4Z
	Ø 10 mm [Ø 0.394"] with adapter sleeve	10
	Ø 12 mm [Ø 0.472"]	12
	Ø 14 mm [Ø 0.551"]	14
	Ø 15 mm [Ø 0.591"]	15
	<b>Single-turn Resolution</b>	<b>Order key</b>
14	Single-turn resolution 1 bit up to 16 bit, recommended min. 6 bit (e. G. 14 bit)	14
	<b>Multi-turn Resolution</b>	<b>Order key</b>
18	Multi-turn up to 32 bit (e. G. 18 bit) (Single-turn + Multi-turn max. 32 bit) No Multi-turn: 00	18
	<b>Data protocol</b>	<b>Order key</b>
CJ	CAN SAE J1939	CJ
	<b>Software</b>	<b>Order key</b>
A	up to date release	A
	<b>Code</b>	<b>Order key</b>
B	binary	B
	<b>Power supply</b>	<b>Order key</b>
0	4.75 V up to 32 V (standard)	0
	<b>Galvanic isolation</b>	<b>Order key</b>
0	no	0
	<b>Electrical connections</b>	<b>Order key</b>
CC5	<b>Cable:</b> radial, shield connected to encoder housing, with 2 m cable	L3
	<b>Connector:</b> sensor-connector, M12x1, 5-pin, radial, shield connected to encoder housing	CC5
	<b>Options</b>	<b>Order key</b>
	Without option	Empty
	Low-friction bearings	AAC
	120 Ohm terminating resistor	AEO

Example Order No.	WDGA 58E	06	14	18	CJ	A	B	0	0	CC5	
-------------------	----------	----	----	----	----	---	---	---	---	-----	--

WDGA 58E											Example Order No.
----------	--	--	--	--	--	--	--	--	--	--	-------------------