

AVAILABLE PROGRAM

CLASSICS MINIATURE	PART REFERENCE	ART. NO.	Ø	SN	MOUNTING	CONNECTION	OUTPUT
	DW-AD-603-03	320-920-036	3	0.6	Embeddable	Cable	PNP N.O.
	DW-AD-623-03	320-920-170	3	1	Embeddable	Cable	PNP N.O.
	DW-AD-623-03-960	320-320-003	3	1	Embeddable	Cable	PNP N.O.
	DW-AV-623-03-276	320-920-319	3	1	Embeddable	Pigtail	PNP N.O.
	DW-AD-603-M4	320-920-065	M4	0.6	Embeddable	Cable	PNP N.O.
	DW-AD-621-M4	320-920-153	M4	1	Embeddable	Cable	NPN N.O.
	DW-AD-623-M4-960	320-320-006	M4	1	Embeddable	Cable	PNP N.O.
	DW-AV-623-M4-276	320-920-329	M4	1	Embeddable	Pigtail	PNP N.O.
	DW-AD-603-04	320-920-040	4	0.8	Embeddable	Cable	PNP N.O.
	DW-AD-623-04	320-920-172	4	1.5	Embeddable	Cable	PNP N.O.
	DW-AD-603-M5	320-920-067	M5	0.8	Embeddable	Cable	PNP N.O.
	DW-AD-621-M5	320-920-154	M5	1.5	Embeddable	Cable	NPN N.O.
	DW-AD-623-M5	320-920-185	M5	1.5	Embeddable	Cable	PNP N.O.
	DW-AS-623-M5	320-920-275	M5	1.5	Embeddable	Connector	PNP N.O.
	DW-AD-623-C5	320-920-182	C5	1.5	Embeddable	Cable	PNP N.O.

FULL INOX MINIATURE	PART REFERENCE	ART. NO.	Ø	SN	MOUNTING	CONNECTION	OUTPUT
	DW-AD-711-04	320-420-683	4	3	Non-embeddable	Cable	NPN N.O.
	DW-AD-713-04	320-420-682	4	3	Non-embeddable	Cable	PNP N.O.
	DW-AV-713-04-276	320-420-684	4	3	Non-embeddable	Pigtail	PNP N.O.
	DW-AD-711-M5	320-420-687	M5	3	Non-embeddable	Cable	NPN N.O.
	DW-AD-713-M5	320-420-686	M5	3	Non-embeddable	Cable	PNP N.O.
	DW-AV-713-M5-276	320-420-688	M5	3	Non-embeddable	Pigtail	PNP N.O.

EXTRA DISTANCE MINIATURE	PART REFERENCE	ART. NO.	Ø	SN	MOUNTING	CONNECTION	OUTPUT
	DW-AD-501-04	320-520-001	4	2.5	Embeddable	Cable	NPN N.O.
	DW-AD-503-04	320-520-003	4	2.5	Embeddable	Cable	PNP N.O.
	DW-AD-503-M5	320-520-013	M5	2.5	Embeddable	Cable	PNP N.O.
	DW-AS-501-M5	320-520-016	M5	2.5	Embeddable	Connector	NPN N.O.
	DW-AS-503-M5	320-520-018	M5	2.5	Embeddable	Connector	PNP N.O.

AVAILABLE PROGRAM

CLASSICS EXTRA PRESSURE	PART REFERENCE	ART. NO.	Ø	SN	MOUNTING	CONNECT.	OUTPUT	PRESSURE RESISTANCE
	DW-AD-623-03E-961	320-320-103	3	0.8	Embeddable	Cable	PNP N.O.	150 bar
	DW-AD-603-M5E	320-920-079	M5	0.6	Embeddable	Cable	PNP N.O.	20 bar

EXTRA DIST. HIGH PRESSURE	PART REFERENCE	ART. NO.	Ø	SN	MOUNTING	CONNECT.	OUTPUT	PRESSURE RESISTANCE
	DW-AD-503-P5	320-520-915	M5	1	Embeddable	Cable	PNP N.O.	500 bar
	DW-AV-503-P5-276	320-520-919	M5	1	Embeddable	Pigtail	PNP N.O.	500 bar

CONNECTING CABLES	PART REFERENCE	ART. NO.	SIZE	PINS	CONFIG.	MATERIAL	LENGTH
	↔ S08-3FVG-020	623-100-102	M8	3	straight	PVC	2 m
	↔ S08-3FVG-050	623-100-110	M8	3	straight	PVC	5 m
	↔ S08-3FUG-020	623-100-106	M8	3	straight	PUR	2 m
	↔ S08-3FUG-050	623-100-104	M8	3	straight	PUR	5 m

MOUNTING CLAMPS	PART REFERENCE	ART. NO.	TYPE	FOR SENSOR SIZE
	 ASU-0001-030	606-000-001	without limit stop	Ø 3
	ASU-0001-040	606-000-002	without limit stop	Ø 4 / M4
	ASU-0001-050	606-000-003	without limit stop	M5

Terms of delivery and right to change design reserved.

HEADQUARTERS

CONTRINEX AG Industrial Electronics
route André Piller 50 - PO Box - CH 1762 Givisiez - Switzerland
Tel: +41 26 460 46 46 - Fax: +41 26 460 46 40
Internet: www.contrinex.com - E-mail: info@contrinex.com



www.contrinex.com




Länna, S-142 50 SKOGÅS Stockholm, Sweden

Ordertel 08-771 00 04 Växel 08-771 02 20
Orderfax 08-771 62 00 Teknisk 08-771 35 80

Email info@hemomatik.se
Internet www.hemomatik.se

© CONTRINEX AG 2014
999 406 002 - 11.14 - 10'000

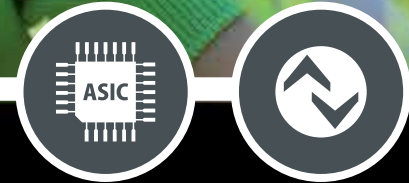


INDUCTIVE SENSORS

MINIATURE
ULTRA-SMALL, POWERFUL, COMMUNICATIVE




INDUCTIVE SENSORS

MINIATURE



YOUR ADVANTAGES

- ✓ Smallest self-contained sensors on the market
- ✓ Versions for harsh and high-pressure environments
- ✓ Ideal solution for applications where space is limited

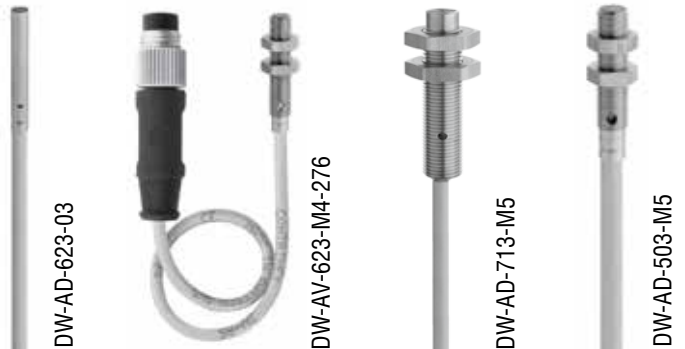

ROBOTICS

MINIATURE
LONG LIFETIME IN HIGHLY DYNAMIC APPLICATIONS

MINIATURE
SENSORS FOR HIGH SPEED PICK-AND-PLACE APPLICATIONS

ELECTRONIC PRODUCTION

MINIATURE
HIGHEST RELIABILITY IN ROUGH ENVIRONMENTS

SPINDLES



FULL INOX MINIATURE

VIRTUALLY INDESTRUCTIBLE
FULL INOX MINIATURE SENSORS

- Extreme robustness in full-metal housing
- Factor 1 on steel and aluminum
- Outstanding temperature stability
- High switching frequencies



PRESSURE-RESISTANT MINIATURE SENSORS

THE SOLUTION FOR SPINDLES, PNEUMATIC AND LUBRICATION SYSTEMS


- Gas-tight sensing face
- Pressure resistant up to 150 bar (2176 psi)
- Miniature devices as small as Ø 3 x 12 mm
- Rugged ceramic or sapphire front face



HIGH PRESSURE-RESISTANT SENSORS

OUTSTANDING LIFETIME IN HIGH PRESSURE AND HYDRAULIC ENVIRONMENTS

- Resistant to fast pressure changes and cycles
- Operating pressure 500 bar (7255 psi), peak pressure 1000 bar (14,510 psi)
- Thick ceramic face for pressure resistance
- Patented shrink technology with inert metal sealing

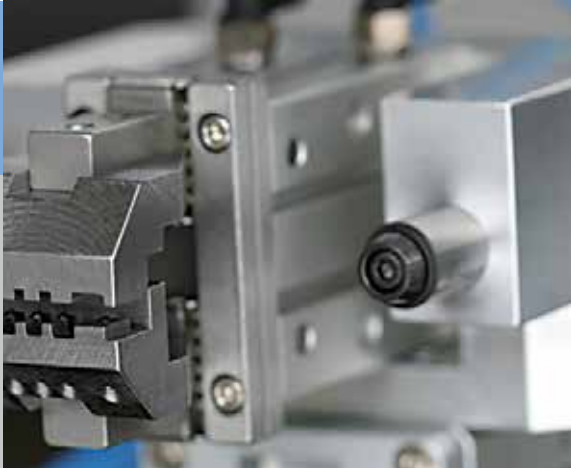

EXTRA DISTANCE MINIATURE

EXCEPTIONALLY LONG OPERATING DISTANCES


- Highest sensitivity for detection of smallest objects
- Reduced sensor downtime due to increased security distance
- High switching frequencies
- Outstanding temperature stability



TECHNICAL VALUES

HIGH PERFORMANCE FOR VERY LIMITED SPACE CONDITIONS


- Sizes from Ø 3 to M5
- Rated operating distances from 0.6 to 3 mm
- Switching frequencies up to 8000 Hz

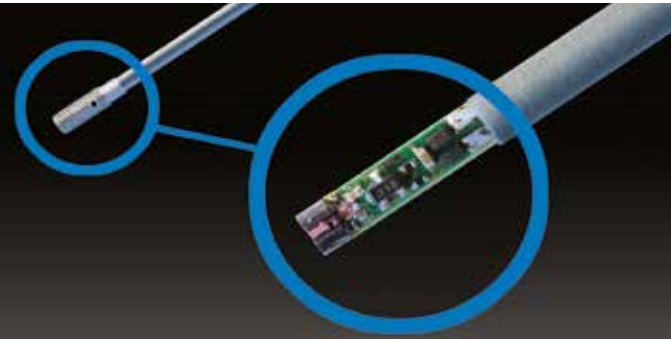

POWERFUL CONTRINEX ASIC

FROM THE WORLD LEADER IN SENSOR ASIC TECHNOLOGY


- Guaranteed operating distances
- Quick installation due to minimal variation between sensors
- Excellent temperature compensation
- Longer lifetime especially in applications with temperature changes and vibrations

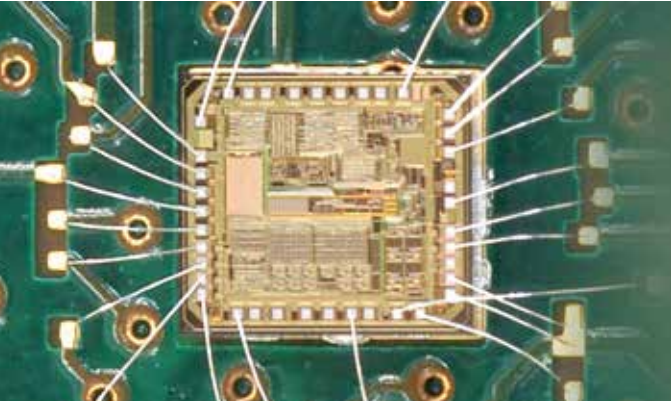

IO-Link

SMART COMMUNICATION WITH CONTRINEX SENSORS

- Continuous monitoring of process data
- Continuous diagnosis of sensor status
- Advanced parameter settings
- Easy check of sensor ID, to ensure the right sensor is at the right place

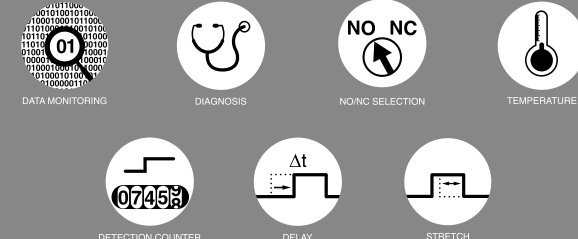

PRODUCT RANGES



CLASSICS MINIATURE

MINIMINI: THE SMALLEST INDUCTIVE SENSOR ON THE MARKET

- No external amplifier necessary, fully integrated electronics
- Vibration and shock resistant
- High performance ASIC sensor
- Long operating distances
- Highest accuracy



CONTRINEX MINIMINI - THE SMALLEST INDUCTIVE SENSOR ON THE MARKET

