





HEMOMATIK Sweden		Liquid Level Switch	Art.nr. SUB-MW28X-3M					
		Pendant switch with weight and submersible	Drawing nr.	Rev.				
Approved	A.N. 240611	Scale	1:1	PUR-cable	Date	240611	Sign.	AN
SURVAKT					Rev. date			

SUBVAKT

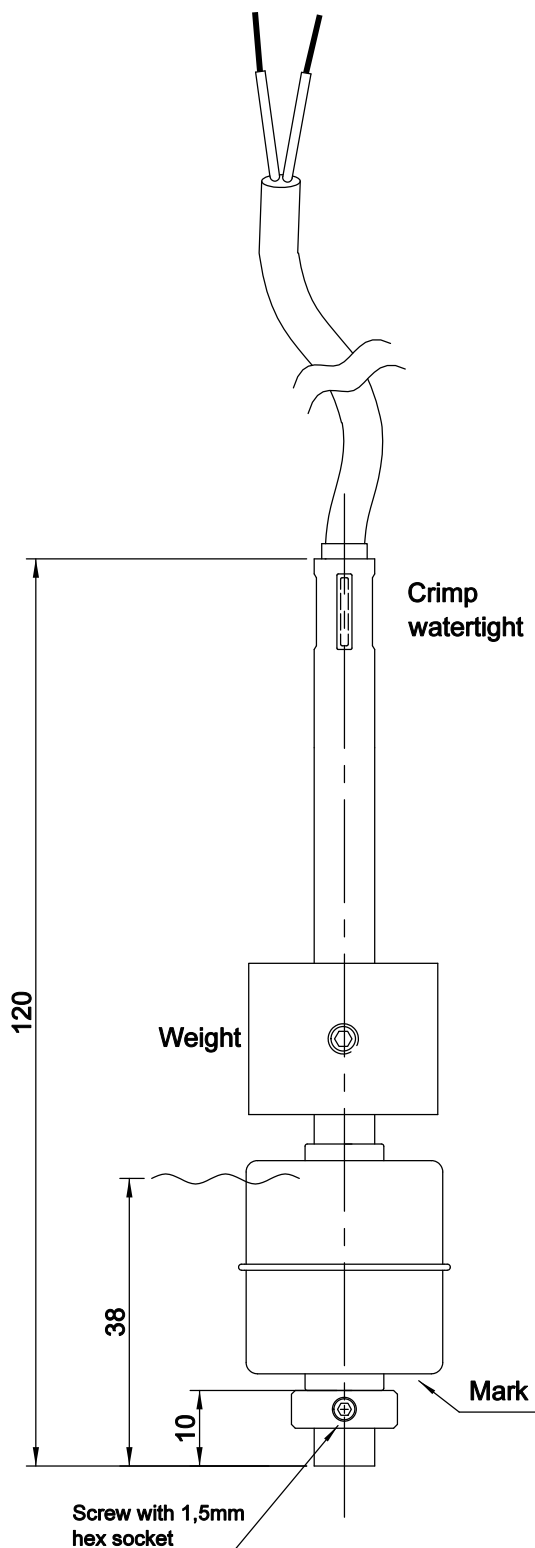

NO **NC**
mark down mark up

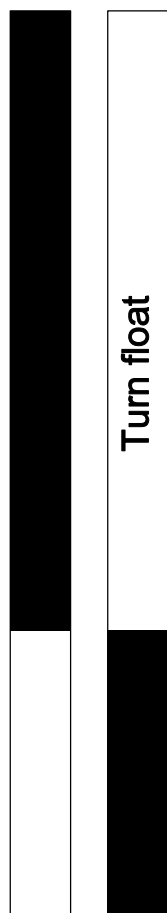

FEATURES

Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS

Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
Weight: Ø25x20mm, SUS-303
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Other cable length on request (KABL500)

CONTACT FUNCTION

NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE

IP68, submersible max 30m

ELECTRICAL DATA

Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load

■ = Switch closed

□ = Switch open