

|                            |             |                               |                     |          |
|----------------------------|-------------|-------------------------------|---------------------|----------|
| <b>HEMOMATIK</b><br>Sweden |             | Liquid Level Switch           | Art.nr. SUB-A28X-3M |          |
|                            |             | G1" adjustable fitting, POM-C | Drawing nr.         | Rev.     |
| Approved                   | A.N. 240613 | Scale 1:1                     | Date 240613         | Sign. AN |
| Submersible PUR-cable      |             |                               | Rev. date           |          |

SUBVAKT



**FEATURES**  
Float liquid level sensor with submersible cable. REED-technology without own power consumption.

**MATERIALS**  
Probe: Ø8x120mm, SUS-316  
Float Ø28mm: SUS-316, density 0,75  
Fitting G1": POM C  
Temp. -20...+85°C  
  
Cable: 3m PUR, 2x 0,50mm²  
Other cable length on request (KABL500)


**CONTACT FUNCTION**  
NO= Open kontakt at low level, close rising  
Turn the float to invert the signal to NC

**PROTECTION DEGREE**  
IP68

| ELECTRICAL DATA  |       |
|------------------|-------|
| Contact rating * | 70 VA |
| max voltage      | 3-48V |
| max current      | 1,5 A |

\* = resistive load

NO    NC  
mark down   mark up

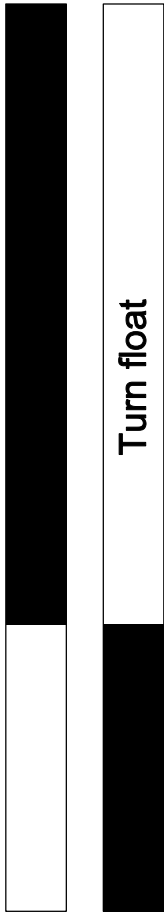

= Switch closed  
 = Switch open

