
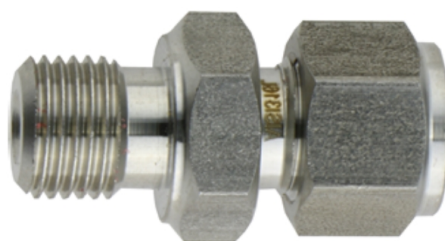


CFM30 SLIDING COMPRESSION FITTINGS METALLIC NOSE CONE FOR Ø 3 mm

Specifically designed to allow direct immersion assembly of the complete variety of mineral insulation thermoelements.

-Re-designed nose cones to ensure a better sealing and vibration resistance.

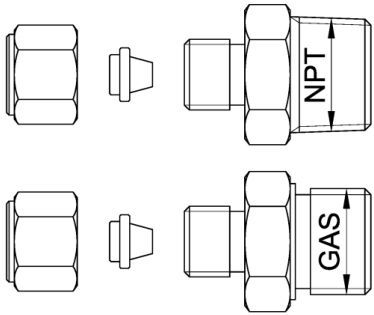

		Y mm	X mm	HEX mm	hex mm
	1/8 NPT	10	~35	12	13
	1/8 GAS	10	~35	14	
	1/4 NPT	15	~45	17	
	1/4 GAS	10	~40	17	
	3/8 NPT	15	~45	17	
	3/8 GAS	15	~45	22	
	1/2 NPT	20	~50	22	
	1/2 GAS	15	~45	24	

TECHNICAL SPECIFICATION

Ferrule	metal ferrule
Sheath diameter d=	Ø 3 mm
For probe	Ø 3 mm
Fixing system	threaded connection
Process Connection	threaded 1/8" GAS CIL. acc. UNI-ISO 228 threaded 1/8" NPT acc. ANSI B 1.20.1 threaded 1/4" CYL. GAS acc. UNI-ISO 228 threaded 1/4" NPT acc. ANSI B 1.20.1 threaded 3/8" CYL. GAS acc. UNI-ISO 228 threaded 3/8" NPT acc. ANSI B 1.20.1 threaded 1/2" CYL. GAS acc. UNI-ISO 228 threaded 1/2" NPT acc. ANSI B 1.20.1
Sheet material	AISI 316
Type of tightness	stainless steel ferrule PN MAX 100 BAR; 3/4 turn tightening