

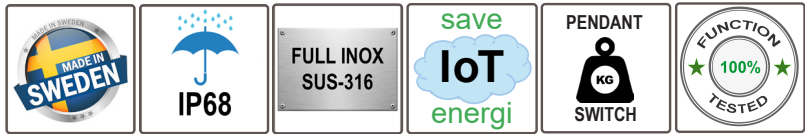


HEMOMATIK Sweden		Liquid Level Switch, SUS-316		Art.nr. SUB-V28X-3M	
		Pendant switch with protection weight		Drawing nr.	Rev.
Approved	A.N. 240416	Scale	1:1	Date	240416
Submersible PUR-cable				Rev. date	AN


SUBVAKT

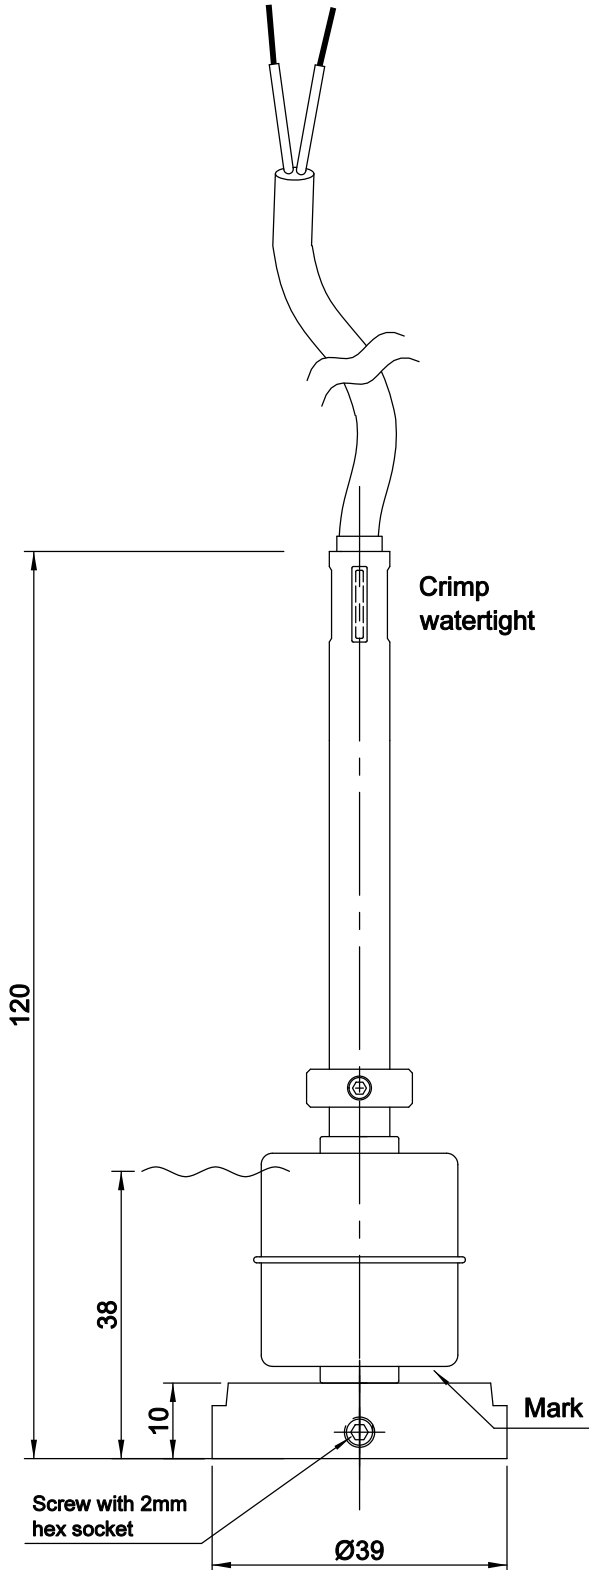

NO **NC**
mark down mark up

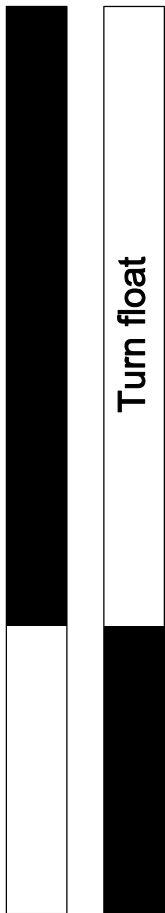

= Switch closed
 = Switch open



Incl. M16 fitting, for cable or probe mounting

FEATURES

Float liquid level sensor with submersible cable. REED-technology without own power consumption.

MATERIALS

Full INOX: All metal parts in SUS-316
Probe: Ø8x120mm, SUS-316
Float Ø28mm: SUS-316, density 0,75
M16 fitting and nut: PA6
Protection weight: SUS-316
Temp. -20...+85°C

Cable: 3m PUR, 2x 0,50mm²
Other cable length on request (KABL500)

CONTACT FUNCTION

NO= Open kontakt at low level, close rising
Turn the float to invert the signal to NC

PROTECTION DEGREE

IP68, submersible max 30m

ELECTRICAL DATA

Contact rating *	70 VA
max voltage	3-48V
max current	1,5 A

* = resistive load