



CFP60 COMPRESSION SLIDE FITTINGS IN PTFE SEALANT GLAND + STAINLESS STEEL PRESSING BUSH FOR Ø 6 mm

Specially designed to allow the direct immersion of the entire range of thermoelements with mineral insulation

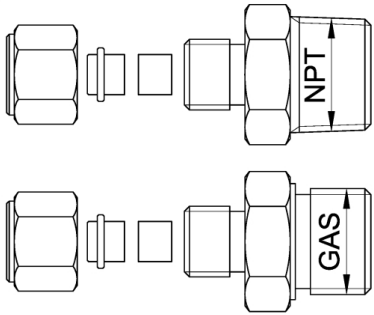

		Y mm	X mm	HEX mm	hex mm
	1/4 NPT	15	~45	17	17
	1/4 GAS	10	~40	17	
	3/8 NPT	15	~45	17	
	3/8 GAS	15	~45	22	
	1/2 NPT	20	~50	22	
	1/2 GAS	15	~45	24	
	3/4 NPT	20	~50	27	
	3/4 GAS	20	~50	32	

TECHNICAL SPECIFICATION

Ferrule	PTFE ring + stainless steel packing
Sheath diameter d=	Ø 6 mm
For probe	Ø 6 mm
Fixing system	threaded connection

TECHNICAL SPECIFICATION

Process Connection

threaded 1/4" CYL. GAS acc. UNI-ISO 228
threaded 1/4" NPT acc. ANSI B 1.20.1
threaded 3/8" CYL. GAS acc. UNI-ISO 228
threaded 3/8" NPT acc. ANSI B 1.20.1
threaded 1/2" CYL. GAS acc. UNI-ISO 228
threaded 1/2" NPT acc. ANSI B 1.20.1

Sheet material

AISI 316

Type of tightness

ring PTFE PN MAX 20 BAR (T MAX 100 °C)