


TUBE THERMOWELL FOR RUBBER PROBES

Thermowell for thermoplastic rubber probes with sealing cable gland

- Allows to use thermoplastic rubber probes for temperature measurement inside pipings or tanks
- Sealing cable gland probe in plastic material

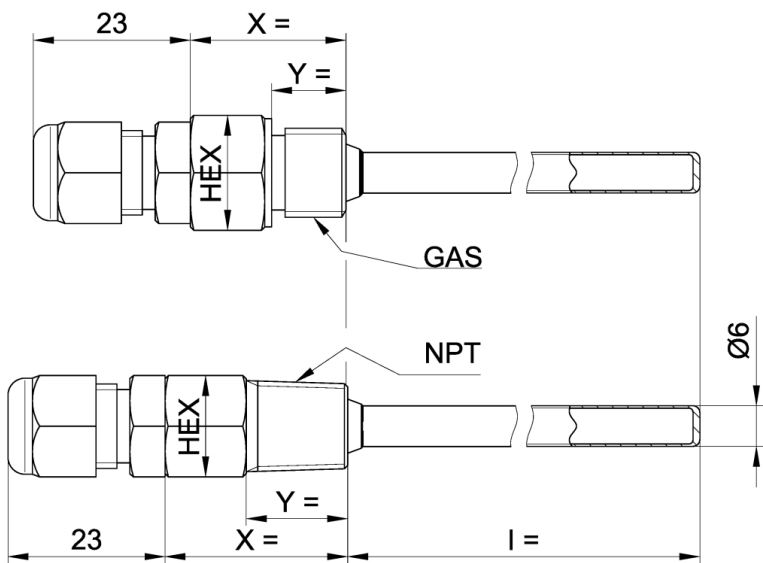

		Y mm	X mm	HEX mm
1/8	NPT	10	22	15
	GAS	10	22	15
1/4	NPT	15	25	15
	GAS	11	23	17
3/8	NPT	-	-	-
	GAS	12	20	22
1/2	NPT	20	28	21
	GAS	15	24	24

TECHNICAL SPECIFICATION

Thermowell pipe	Ø6 x 5.35 mm AISI316L
Sensor fixing mechanism	with plastic cable gland PG7
For probe	in rubber with bulb Ø 5 mm
Fixing system	threaded connection
Process Connection	threaded 1/8" GAS CIL. acc. UNI-ISO 228 threaded 1/8" NPT acc. ANSI B 1.20.1 threaded 1/4" CYL. GAS acc. UNI-ISO 228 threaded 1/4" NPT acc. ANSI B 1.20.1 threaded 3/8" CYL. GAS acc. UNI-ISO 228 threaded 1/2" CYL. GAS acc. UNI-ISO 228 threaded 1/2" NPT acc. ANSI B 1.20.1
Sheet material	AISI 303
Immersion l	35 mm 40 mm 45 mm 50 mm 60 mm 75 mm 90 mm 100 mm 150 mm 200 mm 250 mm 300 mm
Dimensional notes	Immersiones other than those listed can be produced for minimum quantities to be agreed (after our feasibility study)
Variant	null
Maximum working pressure	PN 100 BAR