



## Online Data sheet

HM 2603

### Encoder WDG N 58B

[www.wachendorff-automation.com/wdgn58b](http://www.wachendorff-automation.com/wdgn58b)

#### Wachendorff Automation

##### ... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network



Nyckelvägen 7  
142 50 SKOGÅS, Sweden

Tel: +46 (0)8 771 02 20  
[info@hemomatik.se](mailto:info@hemomatik.se)

[www.hemomatik.se](http://www.hemomatik.se)

**IndustrieROBUST**

# Encoder WDGN 58B configurable via Smartphone (NFC)



Illustration similar



Wachendorff Apps WDGN

- Due to high quality electronics any number of pulses up to 16384 configurable via NFC
- HTL/TTL configurable via NFC
- Protection class IP67, at shaft input IP65
- High output frequency up to 1 MHz
- Reverse polarity protection and short-circuit protection at 4.75 VDC to 32 VDC

[www.wachendorff-automation.com/wdgn58b](http://www.wachendorff-automation.com/wdgn58b)

## Configurable via NFC

Resolution	
Pulses per revolution PPR	1 PPR up to 16384 PPR
Mechanical Data	
Flange	clamping flange
Flange material	aluminum
Housing material	Stainless steel, NFC cover: Thermoplastic polyamide
Flange diameter	Ø 58 mm [Ø 2.283"]
Shaft(s)	
Shaft material	stainless steel
Starting torque	approx. 1 Ncm [1.416 in-ozf] at ambient temperature
Shaft	Ø 6 mm [Ø 0.236"]
Advice	Attention: No option AAO = full IP67 version
Shaft length	L: 12 mm [0.472"]
Max. Permissible shaft loading radial	125 N [12.746 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]
Shaft	Ø 8 mm [Ø 0.315"]
Advice	Attention: No option AAO = full IP67 version
Shaft length	L: 19 mm [0.748"]
Max. Permissible shaft loading radial	125 N [12.746 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]
Shaft	Ø 9.525 mm [Ø 3/8"] Order No: 4Z
Advice	Attention: No option AAO = full IP67 version
Shaft length	L: 20 mm [0.787"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]
Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 20 mm [0.787"]
Max. Permissible shaft loading radial	220 N [22.433 kp]
Max. Permissible shaft loading axial	120 N [12.236 kp]

Bearings	
Bearings type	2 precision ball bearings
Nominale service life	1 x 10 <sup>9</sup> revs. at 100 % rated shaft load 1 x 10 <sup>10</sup> revs. at 40 % rated shaft load 1 x 10 <sup>11</sup> revs. at 20 % rated shaft load
Max. operating speed	8000 rpm

Machinery Directive: basic data safety integrity level	
MTTF <sub>d</sub>	1200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 <sup>11</sup> revs. at 20 % rated shaft load and 8000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data	
Power supply/Current consumption	4,75 VDC up to 32 VDC: typ. 80 mA
Operating principle	magnetic
Output circuit	HTL HTL, inv. TTL TTL, RS422 compatible, inv.
Pulse frequency	HTL up to 16384 ppr: max. 600 kHz TTL up to 16384 ppr: max. 1 MHz
Channels	ABN CH4 and inverted signals
Load	max. 40 mA / channel
Circuit protection	inverse-polarity and short-circuit protection

Nullimpuls setzen:	Setzen: SET = +UB für 2 s Deaktiviert: SET = GND
--------------------	---

Accuracy	
Phase offset	90° ± max. 8.5 % of the period duration
pulse-/pause-ratio	50 % ± max. 7 %

Configurable via NFC:	
<b>BASIC: (BAS)</b>	
Channels:	ABN and inverted
HTL / TTL	freely selectable
Pulses / revolution:	1 ppr up to 16384 ppr freely selectable

Advanced (ADV):	
-----------------	--

Channels:	4 channels configurable + inv. signals (ABN possible)
HTL / TTL:	freely selectable
Pulses / revolution:	1 ppr up to 16384 ppr freely selectable
Number of pulses for each channel:	individually selectable
Set zero pulse:	yes
Pulse width and position:	Width and position adjustable

#### Environmental data

##### Noise immunity:

ESD (DIN EN 61000-4-2):	8 kV
EMC: (DIN EN 61000-4-3):	10 V/m
Burst (DIN EN 61000-4-4):	2 kV
High frequency fields (DIN EN 61000-4-6):	10 V
Surge (DIN EN 61000-4-5):	2 kV
Radio interference:	According DIN EN 55011

##### NFC:

EMC:	According ETSI EN 301 489
RED:	According ETSI EN 300 330

<b>Electrical safety:</b>	DIN EN 61010-1 (VDE 0411-1) / IEC 61010-1 / UL 61010-1 / CSA C22.0 No 61010-1-12
---------------------------	--

Vibration: (DIN EN 60068-2-6)	300 m/s <sup>2</sup> (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s <sup>2</sup> (6 ms)

#### Duty information

Customs tariff number:	90318020
Country of origin:	Germany

#### General Data


Weight	approx. 220 g [7.76 oz]
Connections	cable or connector outlet
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65; cable outlet K1: IP40
Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C, Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F.
Storage temperature	Connector: -40 °C up to +100 °C, Cable: -30 °C up to +80 °C, Connector: -40 °F up to +212 °F, Cable: -22 °F up to +176 °F

#### More Information

General technical data and safety instructions  
<http://www.wachendorff-automation.com/gtd>

Options  
<http://www.wachendorff-automation.com/acc>

**Cable connection L2 axial with 2 m cable (BAS)**

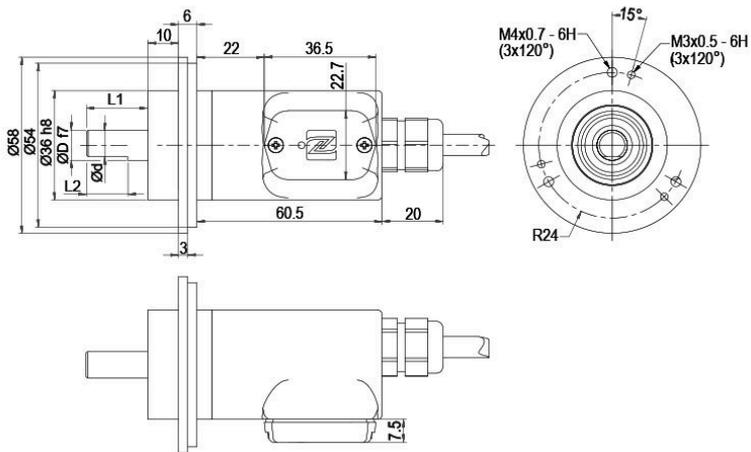

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**


**ABN inv. poss.**

**L2** axial, shield connected to encoder housing

•

Assignments	
	<b>L2</b>
<b>Circuit</b>	BAS
<b>GND</b>	WH
<b>(+) Vcc</b>	BN
<b>A</b>	GN
<b>B</b>	YE
<b>N</b>	GY
<b>A inv.</b>	RD
<b>B inv.</b>	BK
<b>N inv.</b>	VT
<b>Shield</b>	flex

**Cable connection L2 axial with 2 m cable (ADV)**

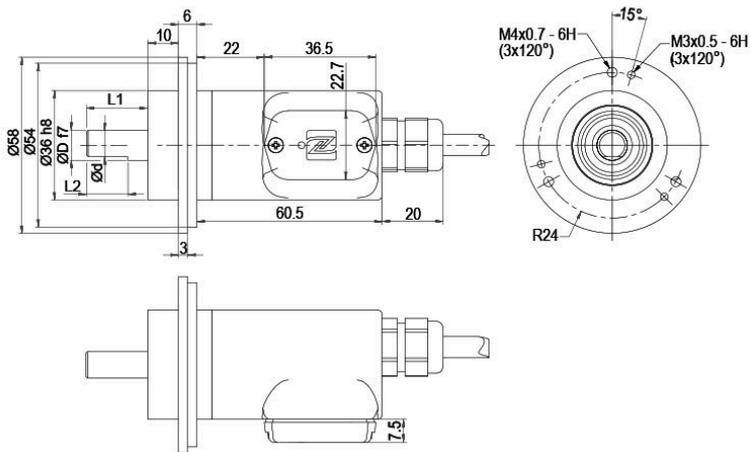

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**


**ABN inv. poss.**

**L2** axial, shield connected to encoder housing

•

Assignments	
	<b>L2</b>
<b>Circuit</b>	ADV
<b>GND</b>	WH
<b>(+) Vcc</b>	BN
<b>CH1</b>	GN
<b>CH2</b>	YE
<b>CH3</b>	GY
<b>CH4</b>	GYPK
<b>SET</b>	PK
<b>CH1 inv.</b>	RD
<b>CH2 inv.</b>	BK
<b>CH3 inv.</b>	VT
<b>CH4 inv.</b>	RDBU
<b>Shield</b>	flex

**Cable connection L3 radial with 2 m cabel (BAS)**

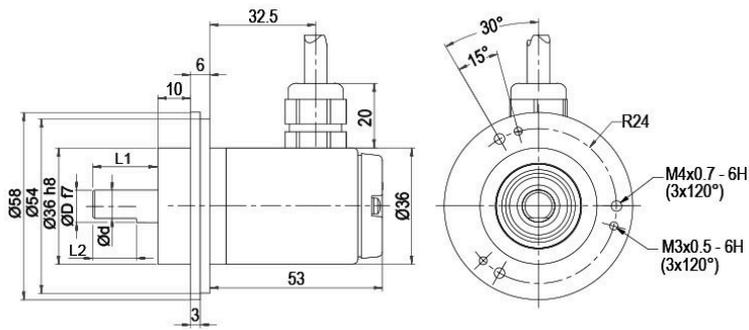

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**

**ABN inv. poss.**


**L3** radial, shield connected to encoder housing

•

Assignments	
	<b>L3</b>
<b>Circuit</b>	BAS
<b>GND</b>	WH
<b>(+) Vcc</b>	BN
<b>A</b>	GN
<b>B</b>	YE
<b>N</b>	GY
<b>A inv.</b>	RD
<b>B inv.</b>	BK
<b>N inv.</b>	VT
<b>Shield</b>	flex



**Cable K1 (IP40) radial with 2 m cable (BAS)**

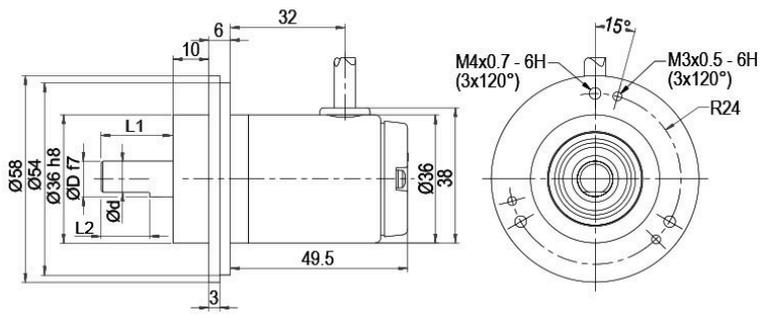

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**


ABN inv. poss.

K1 radial, shield not connected (IP40)

•

Assignments	
	<b>K1</b>
<b>Circuit</b>	BAS
<b>GND</b>	WH
<b>(+) Vcc</b>	BN
<b>A</b>	GN
<b>B</b>	YE
<b>N</b>	GY
<b>A inv.</b>	RD
<b>B inv.</b>	BK
<b>N inv.</b>	VT
<b>Shield</b>	flex

**Cable K1 (IP40) radial with 2 m cable (ADV)**

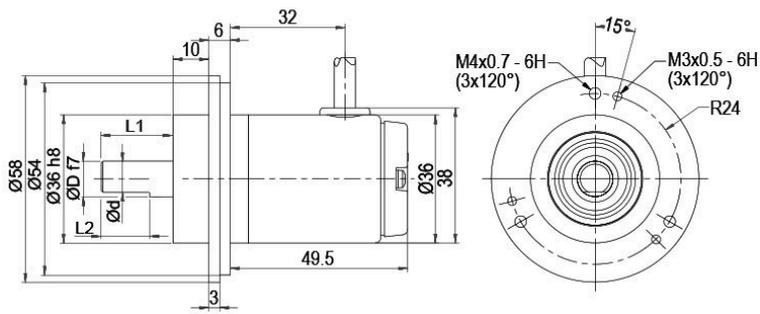

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**


**ABN inv. poss.**

**K1** radial, shield not connected (IP40)

•

Assignments	
	<b>K1</b>
<b>Circuit</b>	ADV
<b>GND</b>	WH
<b>(+) Vcc</b>	BN
<b>CH1</b>	GN
<b>CH2</b>	YE
<b>CH3</b>	GY
<b>CH4</b>	GYPK
<b>SET</b>	PK
<b>CH1 inv.</b>	RD
<b>CH2 inv.</b>	BK
<b>CH3 inv.</b>	VT
<b>CH4 inv.</b>	RDBU
<b>Shield</b>	flex

**Sensor connector (M12x1) SB axial, 8-pin (BAS)**

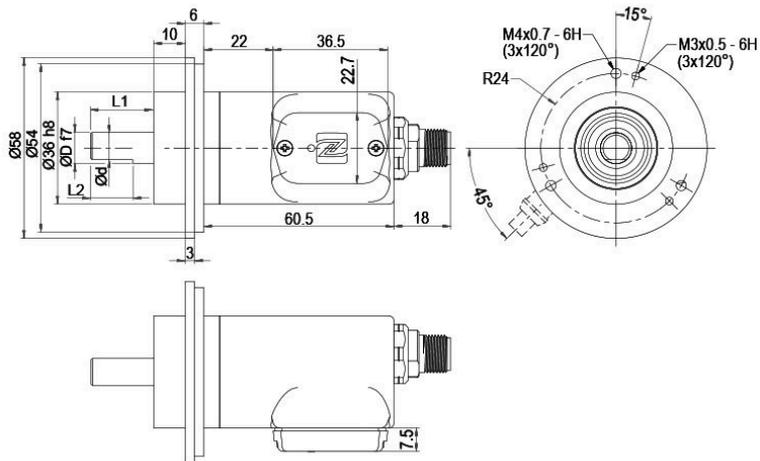

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**


**ABN inv. poss.**

**SB8** axial, 8-pin, Connector connected to encoder housing

•

Assignments	
	<b>SB8</b>
	<b>8-pin</b>
	
<b>Circuit</b>	BAS
<b>GND</b>	1
<b>(+) Vcc</b>	2
<b>A</b>	3
<b>B</b>	4
<b>N</b>	5
<b>A inv.</b>	6
<b>B inv.</b>	7
<b>N inv.</b>	8

**Sensor connector (M12x1) SB axial, 12-pin (ADV)**

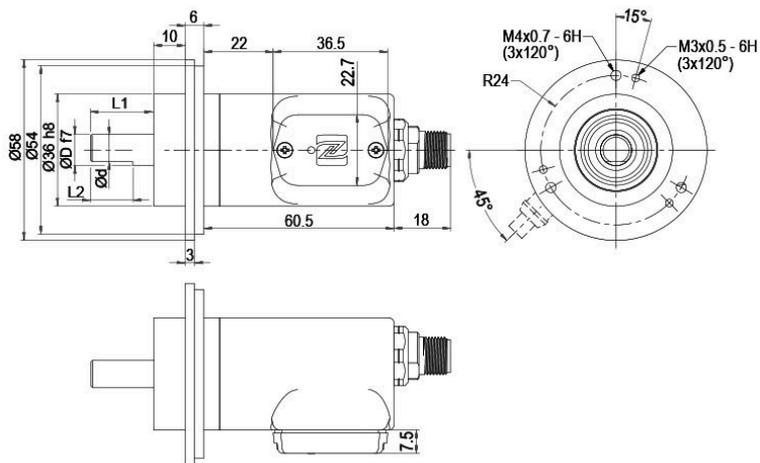

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**


**ABN inv. poss.**

**SB12** axial, 12-pin, Connector connected to encoder housing

•

Assignments	
SB12	
12-pin	
<b>Circuit</b>	ADV
<b>GND</b>	3
<b>(+) Vcc</b>	1
<b>CH1</b>	4
<b>CH2</b>	6
<b>CH3</b>	8
<b>CH4</b>	11
<b>SET</b>	5
<b>CH1 inv.</b>	9
<b>CH2 inv.</b>	7
<b>CH3 inv.</b>	10
<b>CH4 inv.</b>	12
<b>n. c.</b>	2

**Sensor-connector (M12x1) SC radial, 8-pin (BAS)**

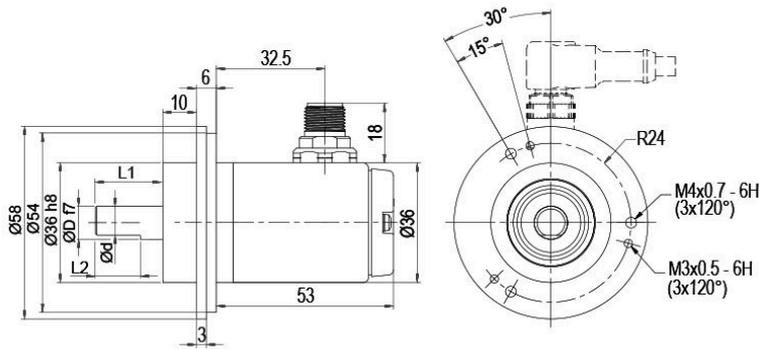

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**


**ABN inv. poss.**

**SC8** radial, 8-pin, Connector connected to encoder housing

•

Assignments	
	<b>SC8</b>
	<b>8-pin</b>
	
<b>Circuit</b>	<b>BAS</b>
<b>GND</b>	1
<b>(+) Vcc</b>	2
<b>A</b>	3
<b>B</b>	4
<b>N</b>	5
<b>A inv.</b>	6
<b>B inv.</b>	7
<b>N inv.</b>	8

**Sensor-connector (M12x1) SC radial, 12-pin (ADV)**

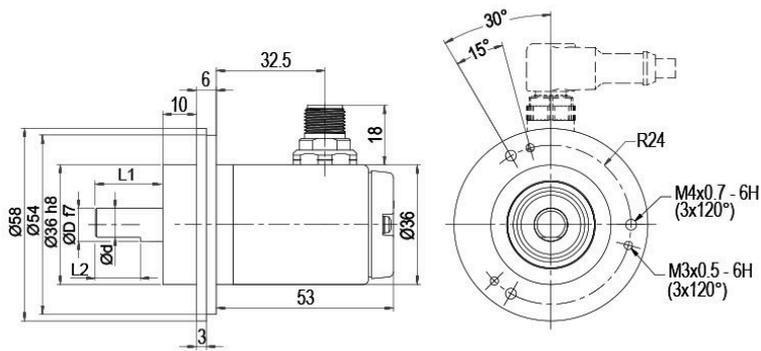

D = 6	L1 = 12	d = 5.3	L2 = 10
D = 8	L1 = 19	d = 7.5	L2 = 15
D = 9.525 [3/8"]	L1 = 20	d = 8.302 [0.327"]	L2 = 10
D = 10	L1 = 20	d = 9	L2 = 15

Alle Abmessungen in mm / All dimensions in mm

**Description**

**ABN inv. poss.**

**SC12** radial, 12-pin, Connector connected to encoder housing

•

Assignments	
	<b>SC12</b>
	<b>12-pin</b>
	
<b>Circuit</b>	ADV
<b>GND</b>	3
<b>(+) Vcc</b>	1
<b>CH1</b>	4
<b>CH2</b>	6
<b>CH3</b>	8
<b>CH4</b>	11
<b>SET</b>	5
<b>CH1 inv.</b>	9
<b>CH2 inv.</b>	7
<b>CH3 inv.</b>	10
<b>CH4 inv.</b>	12
<b>n. c.</b>	2

## Options

### Low-friction bearings

The encoder WDGN 58B is also available as a particularly smooth-running low-friction encoder. The starting torque is thereby changed to 0.5 Ncm [0.708 in-ozf] and the protection class at the shaft input to IP50.

### Order key

**AAC**

### Shafts sealed to IP67, only with 10 mm [0.394"] shaft

The encoder WDGN 58B can be supplied in a IP67 version.  
(full IP67 only connection SB, SC, L2 or L3 version; not cable connection K1 = IP40).  
Max. RPM: 3500 min<sup>-1</sup>  
Permitted Shaft-Loading: axial 100 N [10.197 kp]; radial 110 N [11.216 kp]  
Starting-torque: approx. 4 Ncm [5.664 in-ozf] at ambient temperature

### Order key

**AAO**

### Cable length

The encoder WDGN 58B can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see <https://www.wachendorff-automation.com/download-gtd-incremental-encoders/>  
Please extend the standard order code with a three figure number, specifying the cable length in decimetres.  
Example: 5 m cable = 050

### Order key

**XXX = Decimeter**

Example Order No.	Type					Your encoder
WDGN 58B	WDGN 58B					WDGN 58B
<b>Shaft</b>						
10	06; 08; 4Z; 10					
<b>Pulses per revolution PPR:</b>						
X	1-16384 configurable Other PPRs on request					
<b>Channels:</b>						
X	X (BAS=ABN, ADV= CH1,CH2,CH3,CH4)					
<b>Output circuit</b>						
BAS	<b>Resolution PPR</b>	<b>Power supply VDC</b>	<b>Output circuit</b>	-	<b>Order key</b>	
	configurable 1-16384	4.75 - 32 4.75 - 32	configurable HTL, TTL (A,B,N + inv.) configurable HTL, TTL; 4 channels+inv.	- -	BAS ADV	
<b>Electrical connections</b>						
L2	<b>Description</b>			<b>ABN inv. poss.</b>	<b>Order key</b>	
	<b>Cable: length (2 m standard, WDG 58T: 1 m)</b>					
	radial, shield not connected (IP40)			•	K1	
	axial, shield connected to encoder housing			•	L2	
	radial, shield connected to encoder housing			•	L3	
	<b>Connector: (shield connected to encoder housing)</b>					
	sensor-connector, M12x1, 8-pin, axial			•	SB8	
	sensor-connector, M12x1, 8-pin, radial			•	SC8	
	sensor-connector, M12x1, 12-pin, axial			•	SB12	
sensor-connector, M12x1, 12-pin, radial			•	SC12		
<b>Options</b>						
<b>Description</b>			<b>Order key</b>			
Low-friction bearings			AAC			
Shafts sealed to IP67, only with 10 mm [0.394"] shaft			AAO			
Without option			Empty			
Cable length			XXX = Decimeter			

<b>Example Order No.=</b>	WDGN 58B	10	X	X	BAS	L2		WDGN 58B							<b>Your encoder</b>
---------------------------	----------	----	---	---	-----	----	--	----------	--	--	--	--	--	--	---------------------