


16x multifunctional IO-Link master ports
on a DIN-rail mountable compact unit

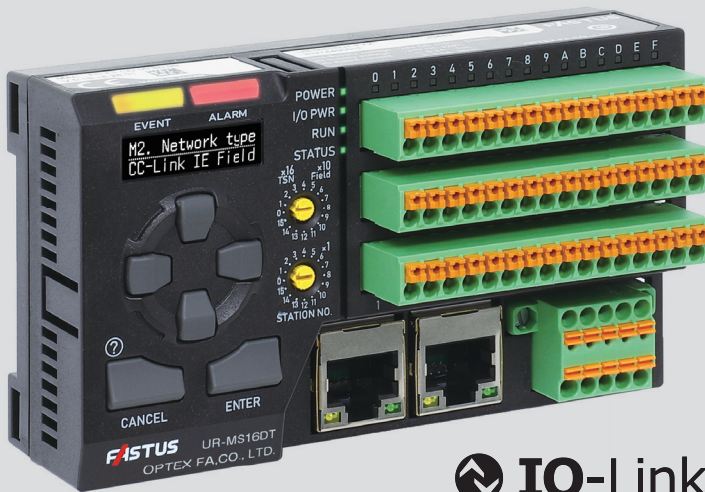

CC-Link **IE TSN**

CC-Link **IE Field**

CC-Link **IE Field Basic**

EtherNet/IP

Modbus TCP

EtherCAT

{JSON}


HM 2502

■ Fastest 0.3ms cycle

Between IO-Link master
and IO-Link device*

*Depends on the performance of the IO-Link device

IO-Link master of
OPTEX FA
Standard IO-Link master

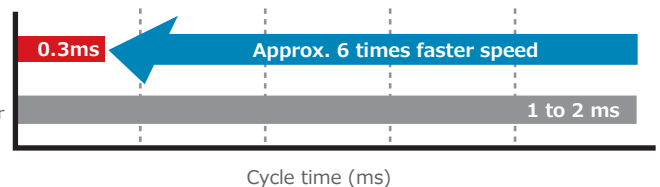

■ MAX. 256x Digital I/O in one configuration

■ Each port can be used as source or sink Digital I/O


■ Up to 250kpps High-speed counter supported

UR-MS16DT/UR-ES16DT

IO-Link master

System overview

Multi functional IO-Link master UR series replaces legacy analog and digital I/O connections

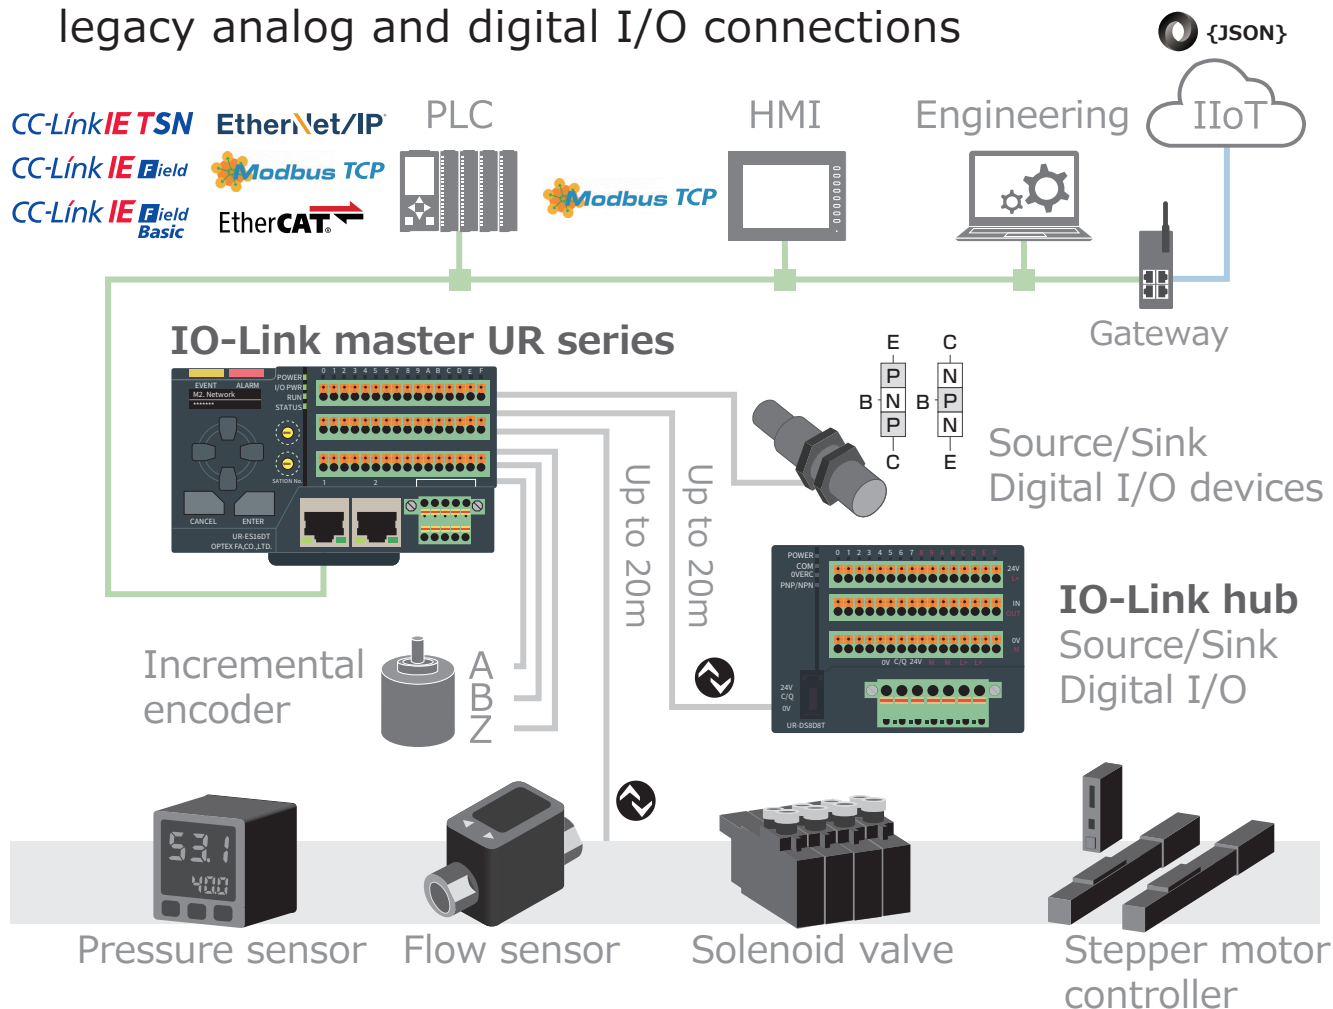

Model	UR-MS16DT	UR-ES16DT	UR-DS16D	UR-DS16T	UR-DS8D8T	UR-DS4AD
Product						
Details	IO-Link master 16xIOL Source/Sink High-speed counter		IO-Link hub 16xDI Source/Sink	IO-Link hub 16xDO Source/Sink	IO-Link hub 8xDI 8xDO Source/Sink	IO-Link hub 4xAI Voltage/Current
Network	 					