
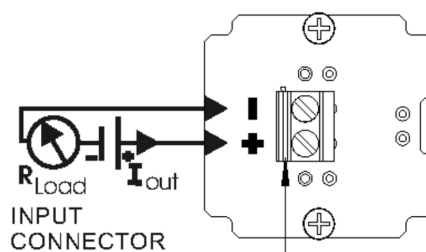


PIPE PROBE

Temperature probe with plastic junction box and 4÷20 mA output

Contact probe for pipe temperature measurements. Setting block are made of brass with a "V" profile in order to be placed on several dimensions of pipes. Sensing element is directly annealed in one setting block. Probe is fixed by hose clip (not provided)

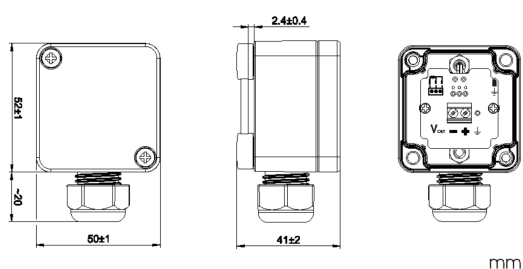

TECHNICAL SPECIFICATION

Power supply	10 ÷ 28 Vcc (polarity protected)
Accuracy (*) (*) @25°C	≤ ±0.3°C
Response time of electronics section	<50 ms
Temperature influence (*) (*) deviation from 20°C	Maximum value between ±0,3°C/25°C and ±0,3% of span/25°C
Permitted load	636 Ω @ 24 Vdc [RLΩ= (Vsupply - 10) / 0,022]
Sensor failure signalling	upper scale (> 21.0 mA) downscale (< 3.6 mA)
Sensor short circuit signalling	Fixed at lower limit of range (< 3.6 mA)
Effect of power supply	Negligible
Electronic board operating temperature	-40 ÷ 80°C
EMC	In accordance to EN 61326-1:2013 (CE) In accordance to BS EN 61326-1:2013 (UKCA)
Terminal electrical connection	2 pole screw terminal block 5.08mm pitch
International protection marking (*) (*) According to IEC 60529	IP65/67
Connection head / junction box material	PLASTIC
Cable gland dimension	Ø 5 ÷ 10 mm
Sensing element	Pt1000 Ω @ 0°C
Pt1000 sensor accuracy	Class A up to 300°C according to IEC751
Sheet material	BRASS CW614N
Box probe version	with metal tile for measurements on pipelines
Tube compatibility	Ø 10 ÷ Ø 100 mm
Fixing accessories	wall mounting screws (self-tapping 3.5 for expansion plugs Ø6 mm) NOT SUPPLIED
Factory default	-40 ÷ 80 °C Other configurations on request

ORDER CODES

SCAT#	DP3AMX
-------	--------

ITALCOPPIE SENSORI srl

Via A. Tonani, 10 - Fraz. S. Giacomo al Campo
26030 Malagnino (CR) - Italy

www.italcoppie.it

WE SENSE
TEMPERATURE

Email info@hemomatik.se
Internet www.hemomatik.se

Växel 08-771 02 20
Teknisk 08-771 35 60

Orderrel 08-771 00 04

Länna S-142 50 SKOGÅS
Stockholm, Sweden

 HEMOMATIK