


HOUSING	OPERATING DISTANCE	MOUNTING	✓ Long sensing range ✓ Outstanding accuracy and temperature stability ✓ Resolution in μm range	
M12	6 mm	Quasi-embeddable	✓ Exceptional price performance ratio ✓ Current/voltage output ✓ IP67	

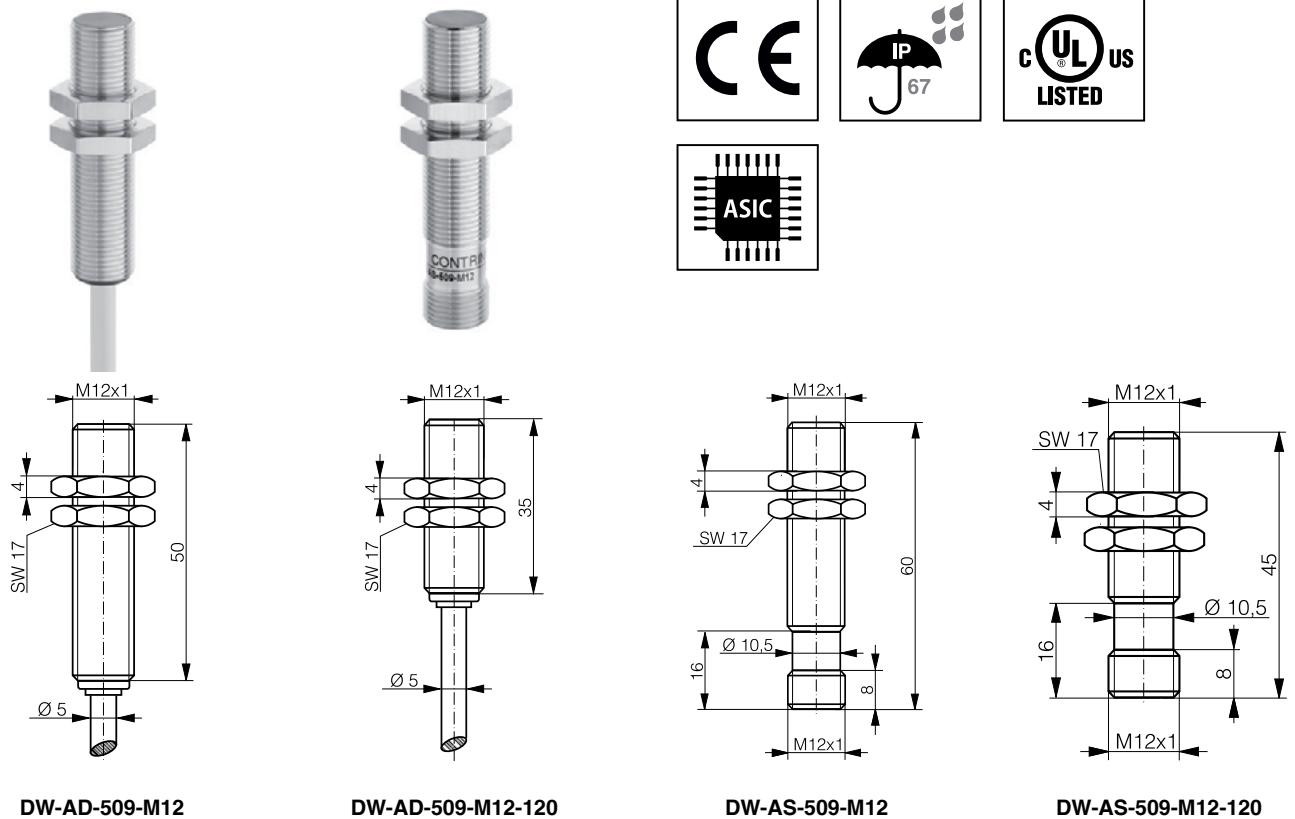

DETECTION DATA		INTERFACE	
Sensing distance (S_d)	6 mm	IO-Link	✗
Repeat accuracy (IEC 60947-5-2)	± 0.32 mm	MTTF (@40°C)	551 y
Static resolution* (@0.67· S_d)	≤ 0.18 μm		
Dynamic resolution* (@0.67· S_d)	≤ 0.9 μm		
Temperature drift of S_d	$\leq 5\%$ (0... +70°C) $\leq 10\%$ (-25... 0°C)		
Standard target	18 x 18 x 1 mm ³ , FE360		

*Static resolution is measured when the target is moving at 20 Hz. Dynamic resolution when the target is moving at the sensor bandwidth limit.

ELECTRICAL DATA		MECHANICAL DATA	
Supply voltage range (U_b)	10...30 VDC	Mounting	Quasi-embeddable
Residual ripple	$\leq 20\%$ U_b	Housing material	Chrome-plated brass
Power consumption (no-load)	≤ 10 mA	Sensing face material	PBTP
Max. load at voltage output	≤ 10 mA	Max tightening torque	10 Nm (6 Nm first 10 mm)
Max. load at current output	1k Ω ($U_b=10\text{V}$) / 5k Ω ($U_b=30\text{V}$)	Ambient operating temperature	-25...+70°C ¹
Bandwidth	1000 Hz	Enclosure rating	IP 67
Time delay before availability	20 ms	Weight (cable / connector)	see page 2
Recovery time	20 ms	Shock and vibration	IEC 60947-5-2 / 7.4
Short-circuit protection	✓		
Voltage reversal protection	✓		
Cable length max.	≤ 300 m		

Note: all data measured according to IEC 60947-5-2 standard with $U_b=20 \dots 30\text{VDC}$, $T_A=23^\circ\text{C} \pm 5^\circ\text{C}$.


¹Maximum temperature according to UL: 70°C.

CORRECTION FACTORS

Steel FE 360	1	Copper	0.28	Aluminum	0.33	Brass	0.43	Stainless S. V2A 1 / 2 mm	0.8
--------------	---	--------	------	----------	------	-------	------	---------------------------	-----

Note: the operating distance of the sensor must be multiplied by the correction factor of the material. For example, the operating distance on Aluminum is $S_{n, Al} = S_n \times CF_{Al}$. In case of embeddable mounting, the distance is multiplied by the additional correction factor of the support, thus $S_{n, Al} = S_n \times CF_{Al} \times CF_{emb, Al}$.

INSTALLATION CONDITIONS

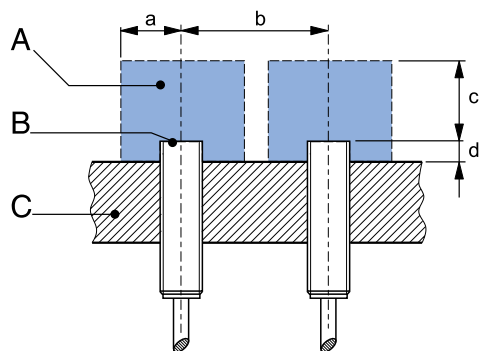


A : metal free zone
B : sensing face
C : support

a : 12 mm
b : 14 mm
c : 18 mm
d : steel 2 mm


Note: additional installation information can be found in the glossary of the Contrinex General Catalog.

RESPONSE DIAGRAM

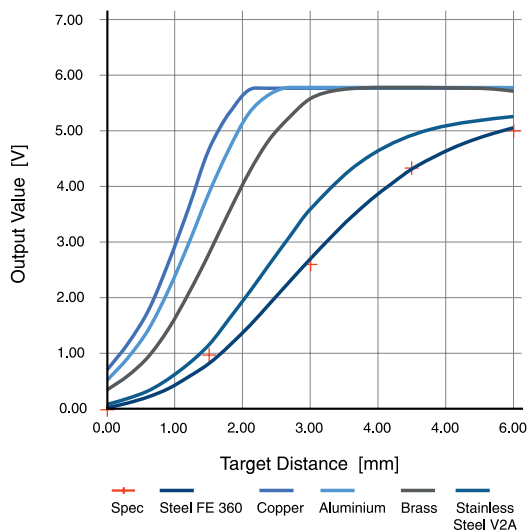


Output voltage	s = 0 mm	0 V / -0.0 + 0.2 V	Output current	s = 0 mm	1 mA ± 0.2 mA
	s = S _d /2 mm	2.6 V ± 0.2 V		s = S _d /2 mm	3.1 mA ± 0.2 mA
	s = S _d mm	5.0 V ± 0.2 V		s = S _d mm	5 mA ± 0.2 mA
	s > S _d mm	5...6 V ± 0.2 V		s > S _d mm	5...5.75 mA ± 0.2 mA

WIRING DIAGRAM

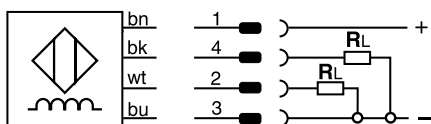

PIN ASSIGNMENT



AVAILABLE TYPES

Part number	Part reference	Connection	Output on pin 2 / wh	Output on pin 4 / bk	Weight
330-020-363	DW-AD-509-M12	PUR, 2 m, 4 wire	1...5 mA	0...5 V	87 g
330-020-364	DW-AD-509-M12-120	PUR, 2 m, 4 wire	1...5 mA	0...5 V	80 g
330-020-370	DW-AS-509-M12	M12 4-pin	1...5 mA	0...5 V	27 g
330-020-371	DW-AS-509-M12-120	M12 4-pin	1...5 mA	0...5 V	23 g



Nyckelvägen 7
142 50 SKOGÅS, Sweden

Tel: +46 (0) 771 02 20
info@hemomatik.se

www.hemomatik.se

Note: part reference may include additional suffix to indicate a revision version or special version. Further information is available on request.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved.

CONTRINEX AG Industrial Electronics

Route du Pâqui 5 – P.O. Box – CH 1720 Corminboeuf – Switzerland – Tel: +41 26 460 46 46
Fax: +41 26 460 46 40 – Internet: www.contrinex.com – E-mail: info@contrinex.com